





EXISTING (PART) PLAN

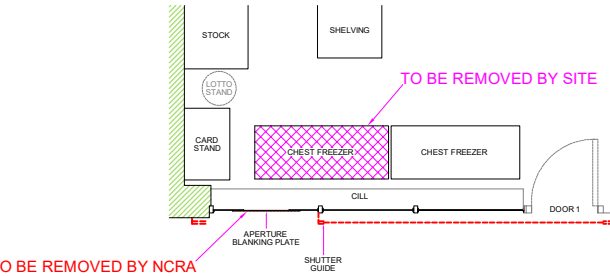


EXISTING ELEVATION

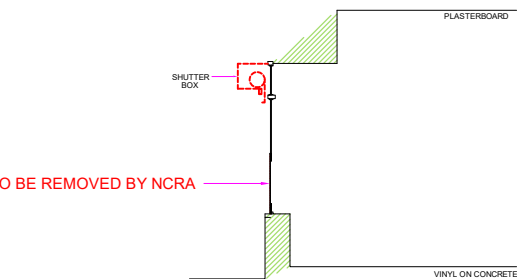

EXISTING SECTION VIEW A-A

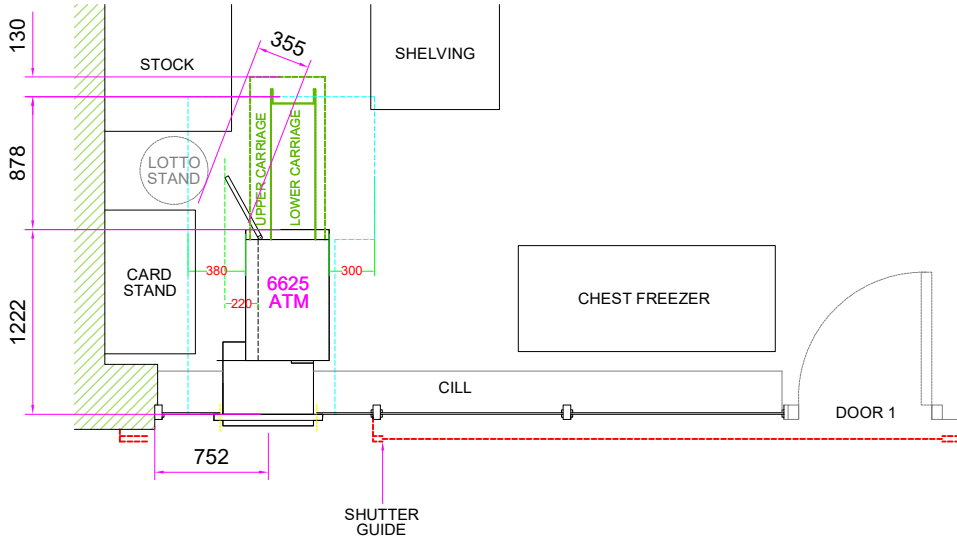

PROPOSED (PART) PLAN

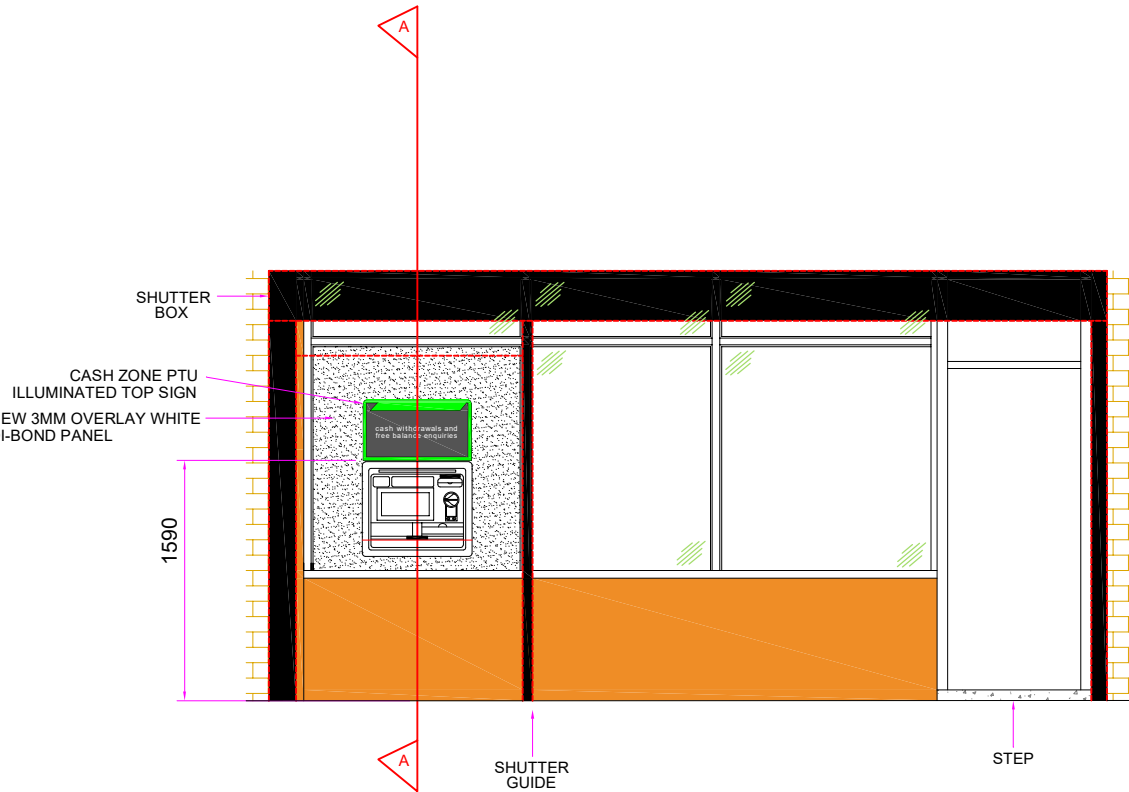

PROPOSED ELEVATION



DO NOT SCALE EXCEPT FOR PLANNING AND BUILDING REGULATION PURPOSES

GENERAL NOTES

LIGHTING :-
ALL LIGHTING TO BE POSITIONED TO AVOID DIRECT GLARE ON THE EYES OF THE USER AND UNWANTED REFLECTIONS FROM THE SCREEN OR OPERATING FEATURES. GLARE FROM LIGHTING TO BE AVOIDED.
SIGNAGE :-
ALL SIGNAGE TO CONFORM TO BS 8300:2001 SECTIONS 9.2.2 LOCATION & DESIGN OF SIGNS & INFORMATION AND 9.2.3 VISUAL SIGNS.
ALL NEW GLAZING CONFORMS TO BS 6206.
ALL ELECTRICAL WORK CONFORMS TO BS 7671.


IT IS ASSUMED THAT ALL PRELIMINARY WORKS CARRIED OUT / CONTRACTED BY THE SITE OWNER (SHOULD THEY BE REQUIRED BY THE PROJECT) ARE COMPLETED IN ACCORDANCE WITH CURRENT BUILDING REGULATIONS 2010 AND AMENDMENTS THEREAFTER

SITE NOTES

FLOOR CONSTRUCTION: VINYL TILE ON CONCRETE
TEMPORALLY REMOVE FRAME LEGS (DOOR 2) FOR DELIVERY ONLY
UNBOLT EXISTING APERTURE BLANKING PLATE AND REMOVE FROM SITE
USE EXISTING APERTURE THROUGH LAMINATE PANEL TO INSTALL PROPOSED TTW ATM
INSTALL: 1X OVERLAY 3MM WHITE DI-BOND PANEL, PLINTH, BOX IN PLINTH, ATM AND ILLUMINATED SIGNAGE
ELECTRICIAN TO CARRY OUT AN EICR & TEST TO EXISTING POWER SUPPLY / CONNECT NEW ATM TO TESTED ELECTRICS
MAKE GOOD INTERNAL APERTURE WITH WHITE PLASTIC TRIM
NOTE:
- NO ASBESTOS REG / NCRA TO ARRANGE ASBESTOS SURVEY REQUIRED PRIOR TO FURTHER SURVEYS AND INVASIVE WORKS COMMENCING
- ALL PROPOSED ATM INSTALL WORKS MUST ALLOW FOR FULL ATM SERVICE CLEARANCE INC. FULL RACK OUT OF REAR DISPENSERS
- IMPEDED SERVICE CLEARANCE APPROVED BY UF230017@ncratleios.com
- FOR ATM ELECTRICS / SEE ELECTRICAL SURVEY
- NO ATM ENCLOSURE INSTALLED / NCRA SECURITY TEAM TO ASSESS
- NON-STANDARD KEY NO. 5 DIMENSION
- CASH ZONE REQUESTED ILLUMINATED SIGNAGE
- SITE IS SITUATED IN A CONSERVATION AREA / PLANNING PRIOR
- FREE PARKING TO SHOP FRONT

WORK TO BE CARRIED OUT BY SITE

PROVIDE FULL ACCESS FOR ASBESTOS AND ATM INSTALLATION WORKS
REMOVE: 1 X CHEST FREEZER, 1X BOTTOM SHELVING RACK BESIDE DOOR 2 FOR ATM DELIVERY / ALL LOOSE STOCK & STORED ITEMS FROM PROPOSED ATM LOCATION PRIOR TO WORKS DATE AND ENSURE ATM AREA IS CLEAR OF STOCK ITEMS FOR ATM SERVICING AS REQUIRED

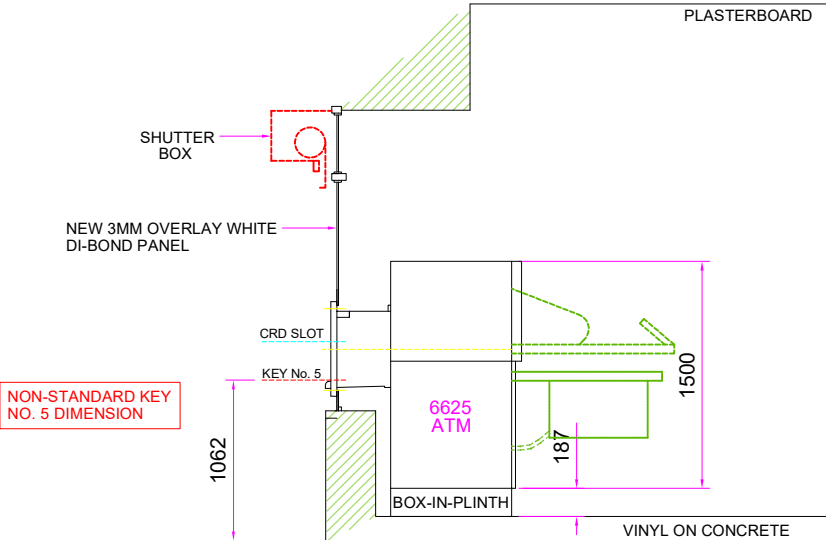

SECTION VIEW A-A

SITE ADDRESS THE CONVENIENCE STORE 113 BROAD LANE KIRKBY LIVERPOOL L32 6QD	TITLE PROPOSED AUTOMATED TELLER MACHINE (ATM) INSTALLATION FOR CASHZONE			04			drawing approval	
				03				
				02				
	DRAWN II	DATE 01/06/2026	SCALE VARIOUS @A3	01	ATM TYPE CHANGED FROM 6625 ADV BEZEL TO 6625 STD BEZEL DUE TO AVAILABILITY.	17/06/26	MAL	NAME:-
REF/DRG No. E031235	SHEET		REVISION 01	REVISION	DESCRIPTION	DATE	BY	POSITION:-
								APPROVED:-
								SIGNED:-

