


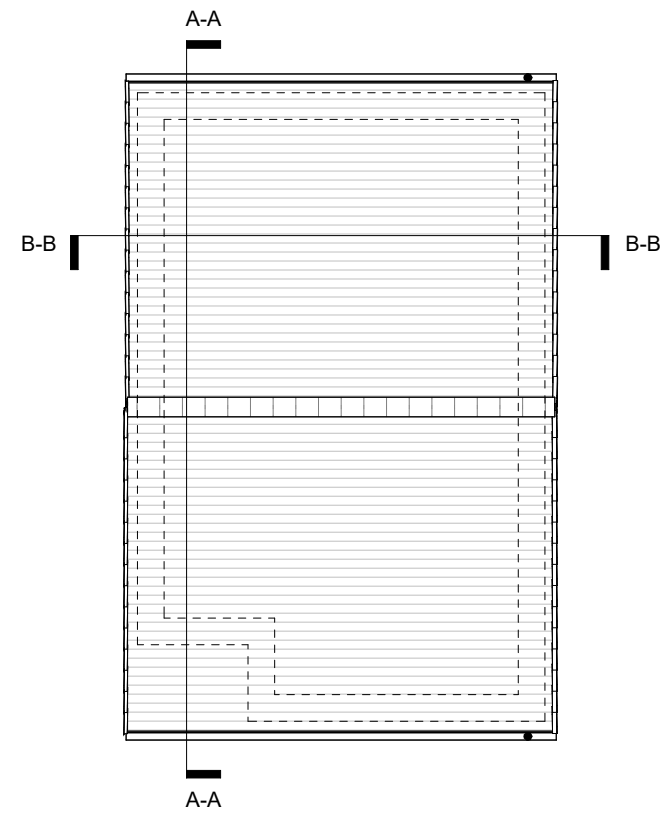

Materials Key	
	Vapour Check Vapour Barrier (Visqueen or Equal Approved) - All joints to be lapped by min 150mm and taped to prevent aerosol migration.
	Single Sided jointing tape (Visqueen or equal approved).
	Double Sided jointing tape (Visqueen or equal approved).
	Visqueen Zedex High Performance CPT DPC
	Visqueen Randon R400 Membrane to be installed above beam and block floor, all joints are to be minimised and taped and lapped (min 150mm) in accordance with manufacturers recommendations and standard details.

NOTE: To be read in conjunction with S.E Drawings provided by SWF CONSULTANTS LTD issued on 16/12/20. Detail subject to S.E. comment / approval

NOTE: To be read in conjunction with SAP Assessor Report provided by Bridgewater Energy issued on 31/03/26.

C Minor Amendments To Partitions To Suit Part M4(2) Standards	JL	Jul '26
B Amended To Suit Eaves Detail	JL	Jun '26
A Minor Amendments	JL	May '26
* First Issue	JL	May '26

CONSTRUCTION

condy lofthouse
architects

Client
Built Group Ltd

Project
Lyme Grove, Longview, Huyton

Title		
Proposed GA Section B-B - Plot 1		
Scale	Date	Drawn by
1:25@A1	05/14/26	J
Drawing No	Revision	
26-023-151		

Unit 17 Connect Business
Village
24 Derby Road
Liverpool L5
9PR

PLOT:
1

