


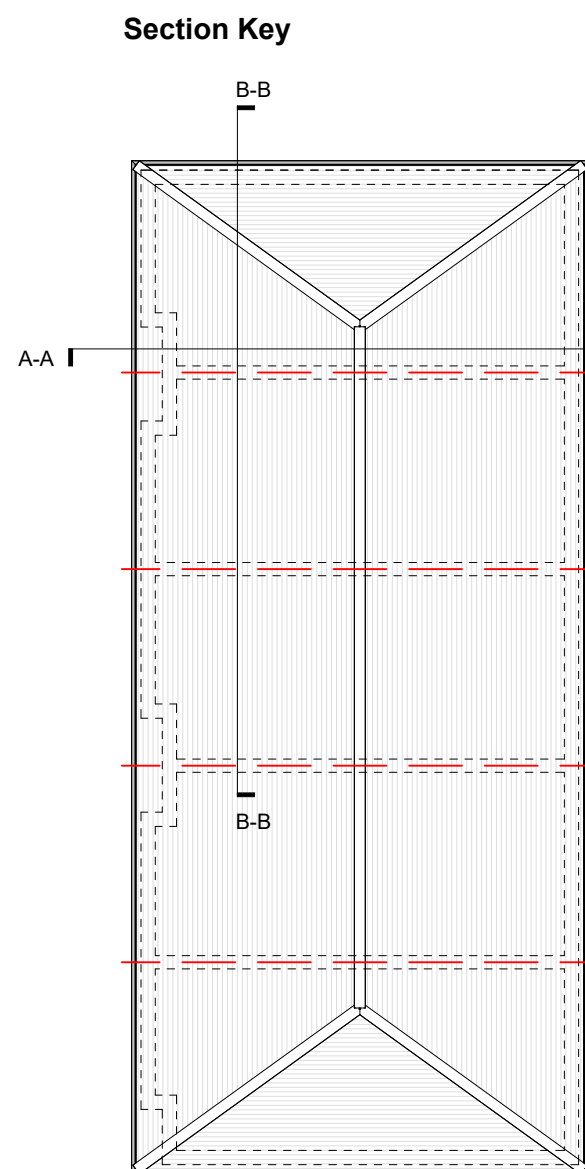

Materials Key

- Vapour Check N/Apours Barrier (Visqueen or Equal Approved) - All joints are to be lapped by min 150mm and taped to prevent screw migration.
- Single Sided jointing tape (Visqueen or equal approved).
- Double Sided jointing tape (Visqueen or equal approved)
- Visqueen Zedex High Performance CPT DPC
- Visqueen Random R400 Membrane to be installed above beam and block floor, all joints are to be minimised and taped and lapped (min 150mm) in accordance with manufacturers recommendations and standard details.

NOTE: To be read in conjunction with S.E Drawing
provided by SWF CONSULTANTS LTD issued o
16/12/20
Detail subject to S.E. comment / approval

NOTE: To be read in conjunction with SAP Assess
Report provided by Bridgewater Energy issued o
31/03/26

B Amended To Suit Eaves Detail	JL	Jun '26
A Updated For Construction Issue	JL	Jun '26
* First Issue	JL	May '26

CONSTRUCTION

condy lofthouse
architects

Client
Built Group Ltd

Project
Lyme Grove, Longview, Huyton

Proposed GA Section A-A - Plots 8-17

Scale	Date	Drawn by
1:25@A1	May '26	J. H. ...

Drawing No	Revision
26-023-155	

Unit 17 Connect Business Village	0151 207 4371
----------------------------------	---------------

Liverpool L5 9PR www.condyfletcher.co.uk

PLOTS:
16 & 17

