






proposed
elevation D

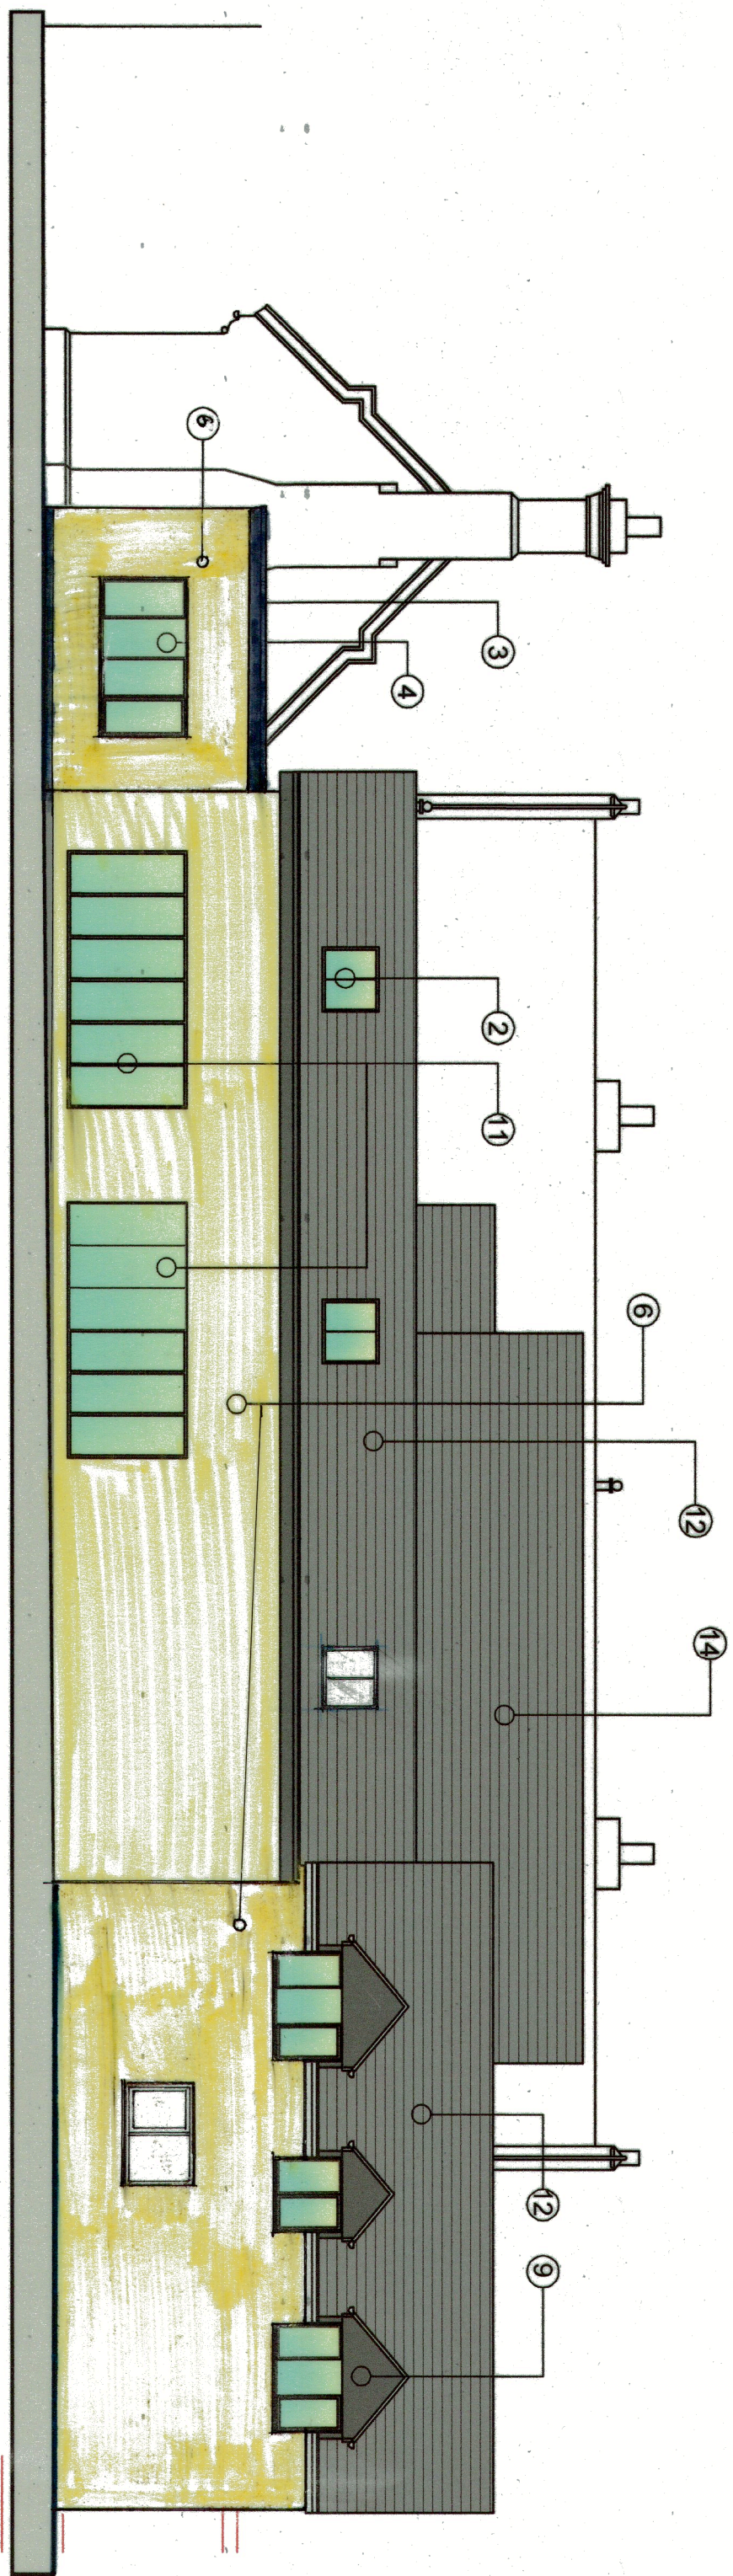


proposed
elevation E

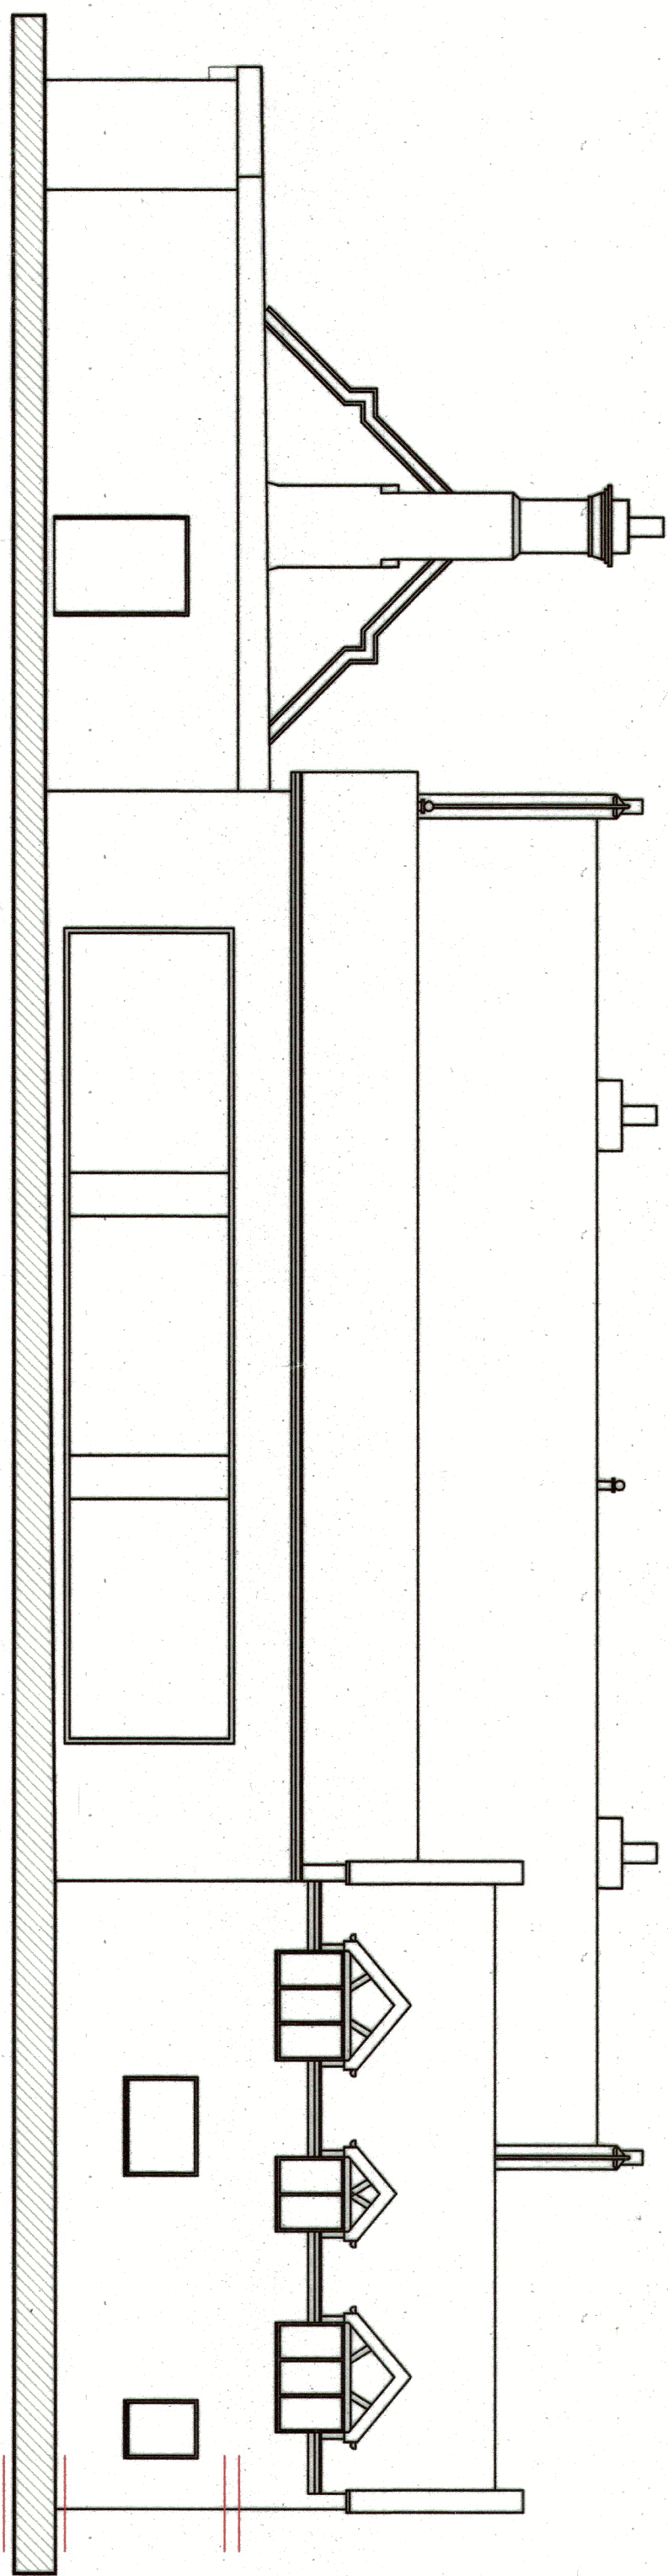


elevation D

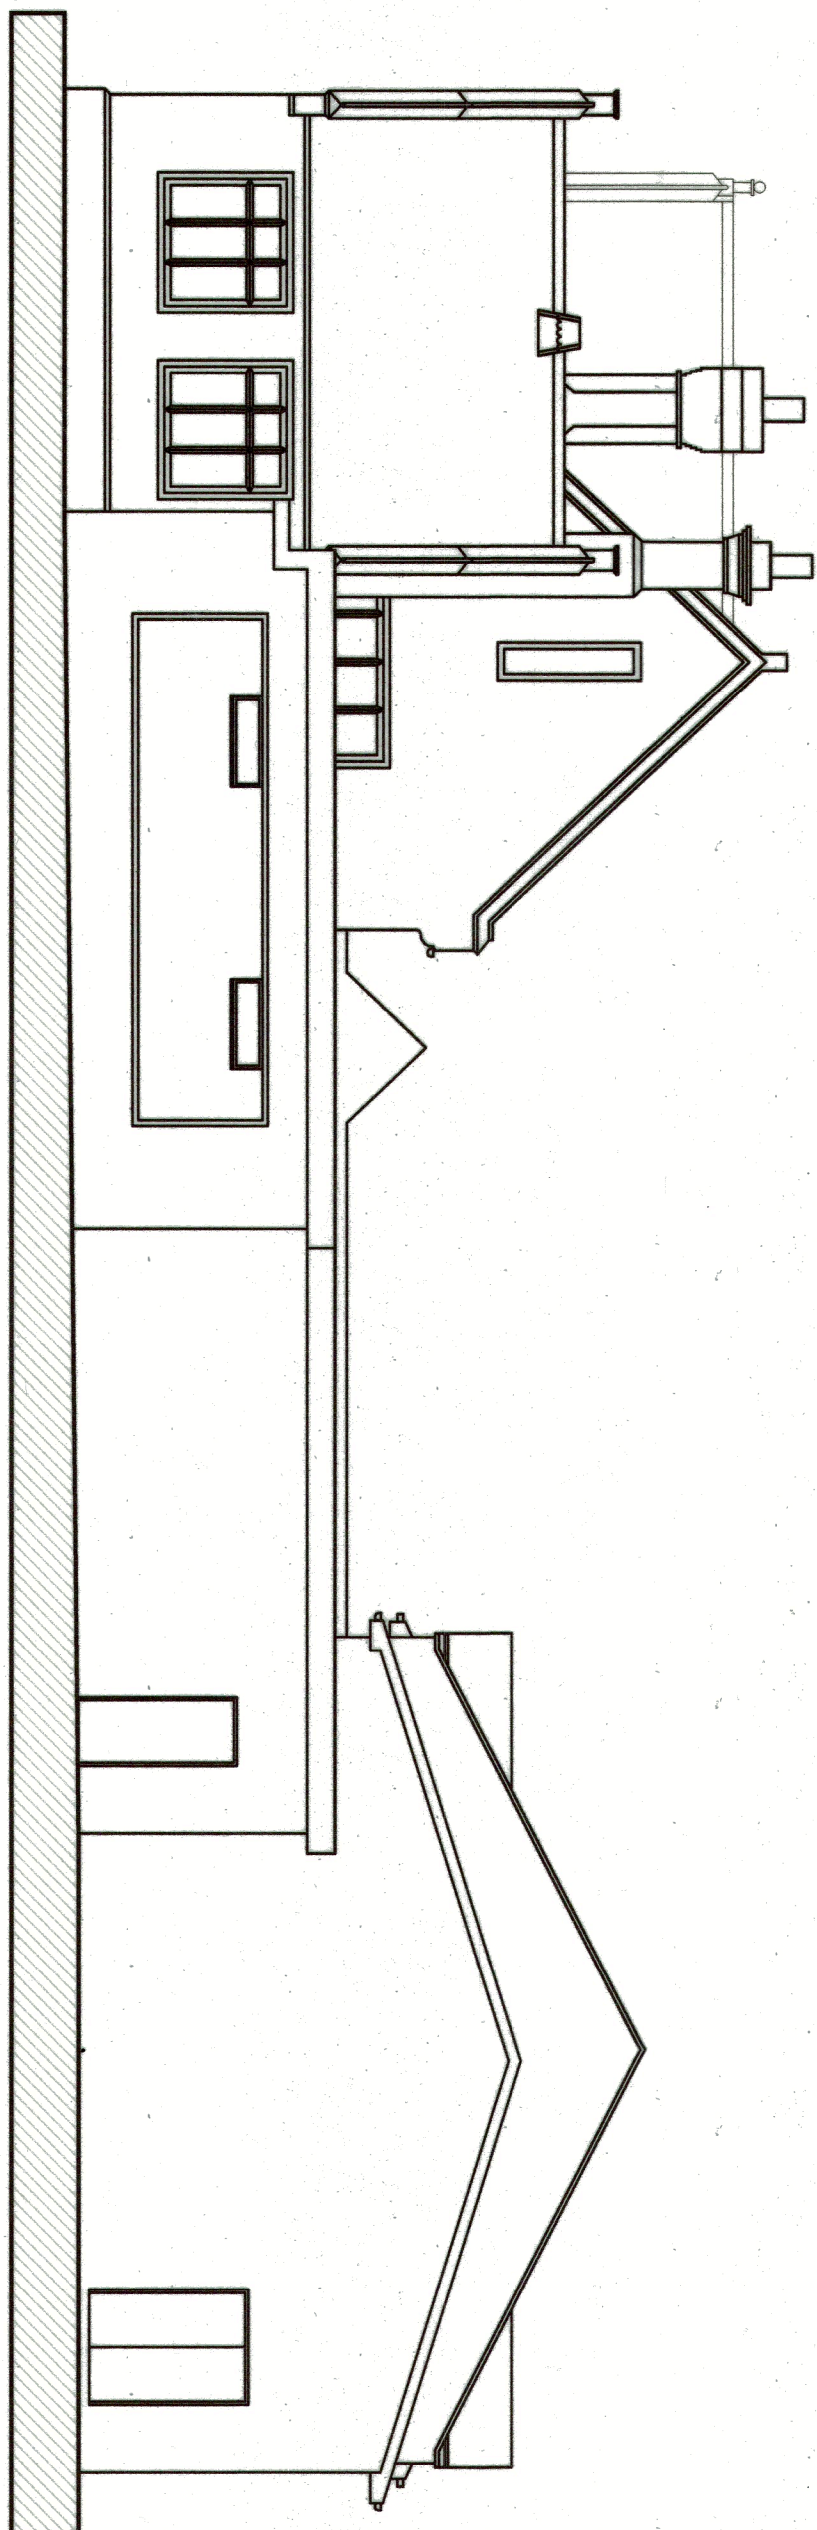


elevation E

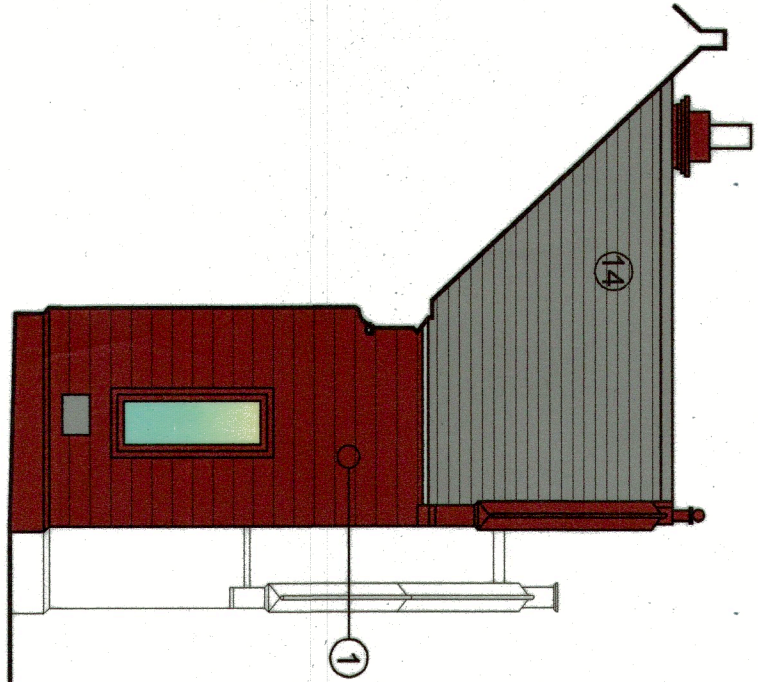


proposed
elevation F

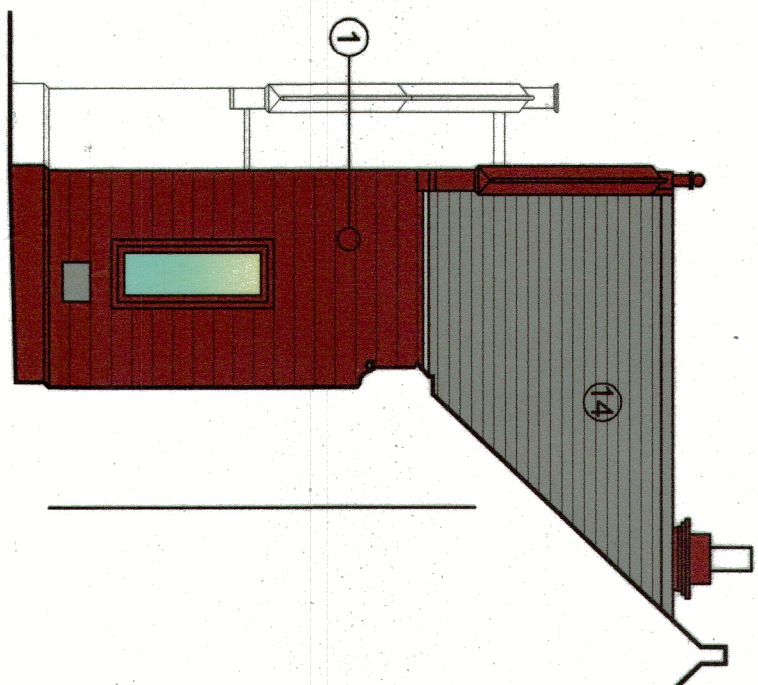

proposed
elevation G

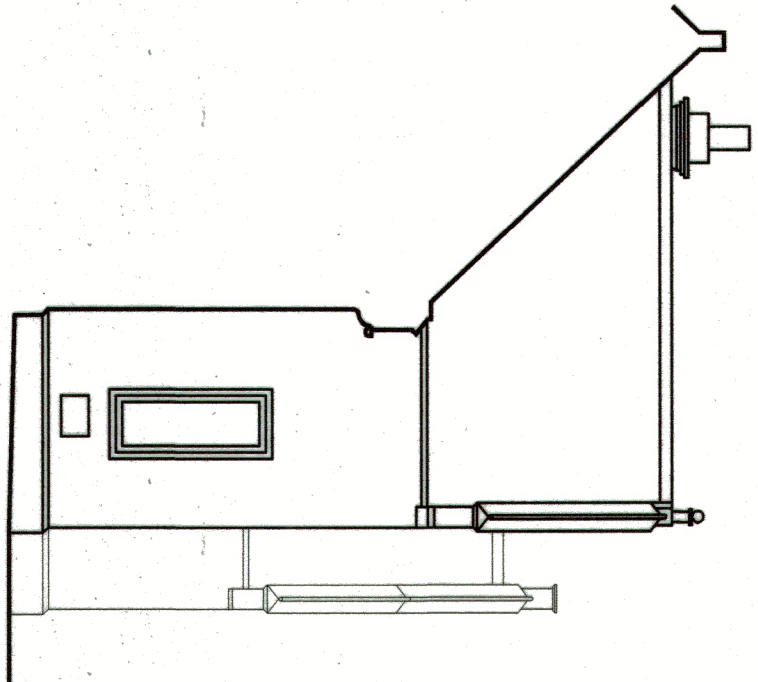


elevation F

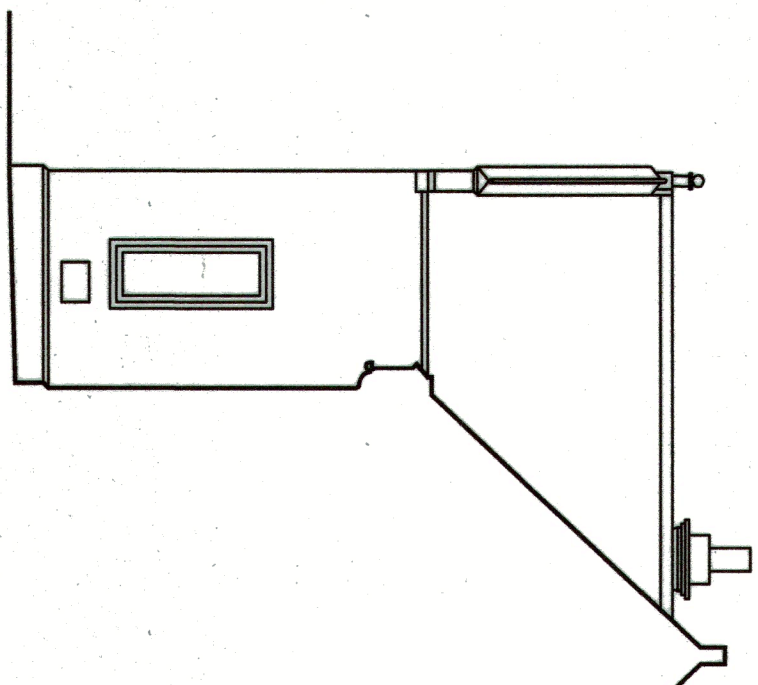

elevation G

proposed floor detail

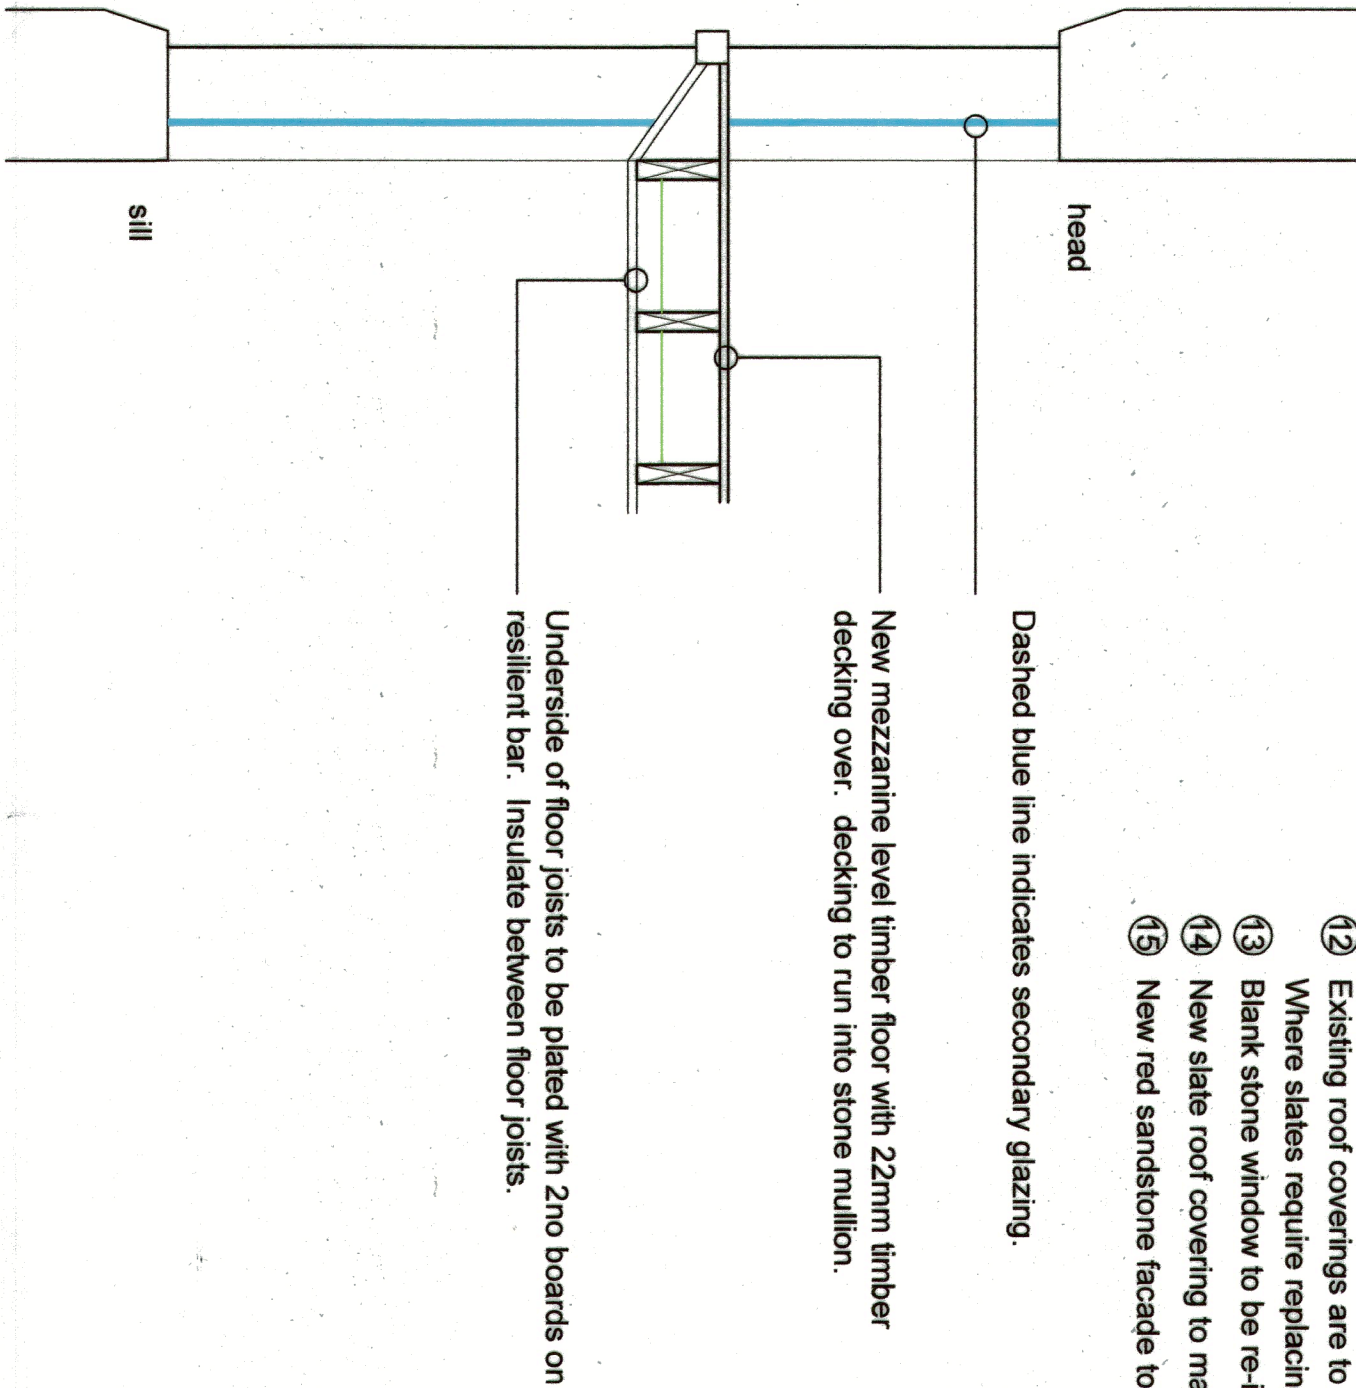

PLANNING NOTES:-

- Existing stonework to be professionally cleaned.
- New conservation style roof tiles.
- Stone banding course and coping stone to match existing stonework.
- New grey amonised aluminium windows.
- Existing brickwork to be retained and repointed.
- New Rand through colour render finish.
- New garage door to be installed.
- Pikes to receive lead facing.
- Lantern roof tile set over new fibreglass roof covering.
- New grey amonised aluminium bi-folding doors.
- Existing roof coverings are to be retained and refurbished.
- Where slates require replacing a like for like type and style is to be sourced.
- Blank stone window to be re-introduced with glazed panes.
- New slate roof covering to match existing.
- New red sandstone facade to match existing stone.

SERVICES

SERVICES
SERVICES EXIT LOCATIONS ARE TO BE LOCATED IN THE PRINCIPAL ELEVATIONS. ALL
NO FLUE / SERVICE FLUES ARE TO BE LOCATED WITHIN THE VALLEY ROOF ELEVATION.
EXISTING LEADED ROOF VENTS TO MAIN BLOCK AND LOWER LEVELS ARE TO BE RETAINED/
REFURBISHED WHERE NECESSARY.

VENTILATION
WE ARE PROPOSING A WHOLE HOUSE VENTILATION SYSTEM TO BE INTRODUCED INTO THE
SCHEME. ANY OUTLETS WILL BE LOCATED ON REAR ROOF ELEVATIONS.

WINDOWS
ALL EXISTING LEAD LIGHT WINDOWS ARE TO BE RETAINED AND REPAIRED IT IS OUR INTENTION
TO PROVIDE SECONDARY GLAZING TO ALL ELEMENTS THAT REQUIRE THIS PROCEDURE.

Client	Mr. Brendan Cain / Killow Group	Rev	Issue	Description
Job Ref	Milbrook Manor, Knockly Village			
Drawing Title	Proposed Elevations			
Job No.				
Scale	1:100	Revision	/	
Date	June 2024	Drawn	05	