



VILLAGE HARVEST MULTI

BUTTERLEY
BRICK

VILLAGE HARVEST MULTI



Manufactured to BS EN 771-1

Brick type

Category II, U, Clay Masonry Unit

Standard work size

215 x 102.5 x 65mm

Dimensional tolerances

Tolerance category: T2

Range category: R1

Compressive strength

≥ 30N/mm²

Water absorption

≤ 20%

Durability

F2

Active soluble salts content

S2

Configuration

Vertically Perforated 18-25% Voids

Dry weight per brick

1.90kg

Pack Size

495

Factory

Desford

SKU

SDESVHM1600VO

Sales +44 (0) 330 1231017

Technical +44 (0) 330 1231018

Email bricks@forterra.co.uk

Disclaimer: The reproduction of colours and textures is only as accurate as the printing process will allow. Photographic samples should be used when shortlisting products but we advise that an actual sample should be seen before ordering.

BES 6001

Responsible Sourcing


www.greenbooklive.com



BUTTERLEY



forterra.co.uk

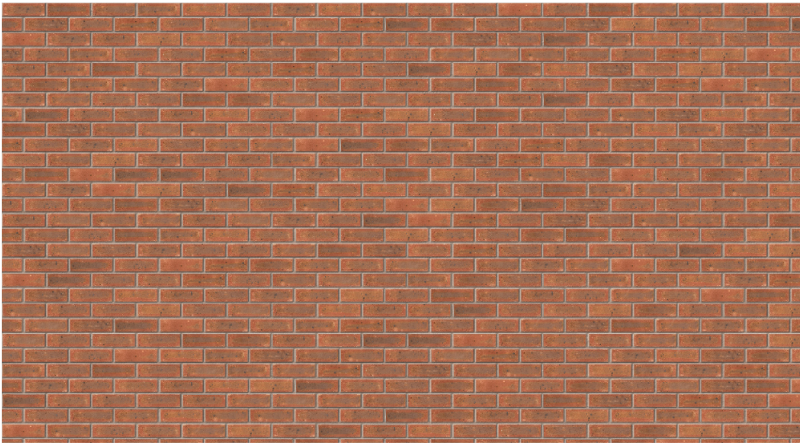


Product Information

Ibstock Code:	A2405A
Type:	Wirecut Extruded
Facing Description:	Sandfaced
Dry Brick Weight (kg):	1.9kg
Pack Quantity:	475
Packaging (standard):	Banded (Plastic) and Stretchwrap
Factory:	Dorket Head
EPD:	

Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm):	215x102x65
Size Tolerances Mean & Range:	T2 R1
Configuration:	Vertically Perforated
Voids (%):	NPD
Compressive Strength (N/mm²):	40
Active Soluble Salts:	S2
Water Absorption (% weight):	16
Durability:	F2
Gross Dry Density (Sound Insulation) (Kg/m³):	1390
Equivalent Thermal Conductivity "K" value 5% Exposed:	0.91
Initial Rate of Absorption (Suction Rate) (Kg/m²/min):	1.1
EAN:	5.03634E+12

Hardwicke Minster Sandstone Mixture

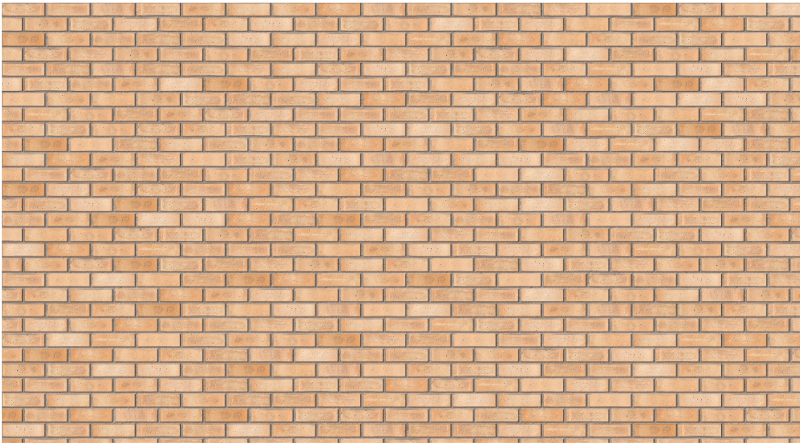


Product Information

Ibstock Code:	A2418A
Type:	Wirecut Extruded
Facing Description:	Rolled
Dry Brick Weight (kg):	1.9kg
Pack Quantity:	475
Packaging (standard):	Banded (Plastic) and Stretchwrap
Factory:	Dorket Head
EPD:	

Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm):	215x102x65
Size Tolerances Mean & Range:	T2 R1
Configuration:	Vertically Perforated
Voids (%):	NPD
Compressive Strength (N/mm²):	40
Active Soluble Salts:	S2
Water Absorption (% weight):	16
Durability:	F2
Gross Dry Density (Sound Insulation) (Kg/m³):	1390
Equivalent Thermal Conductivity "K" value 5% Exposed:	0.91
Initial Rate of Absorption (Suction Rate) (Kg/m²/min):	1.1
EAN:	5.03634E+12

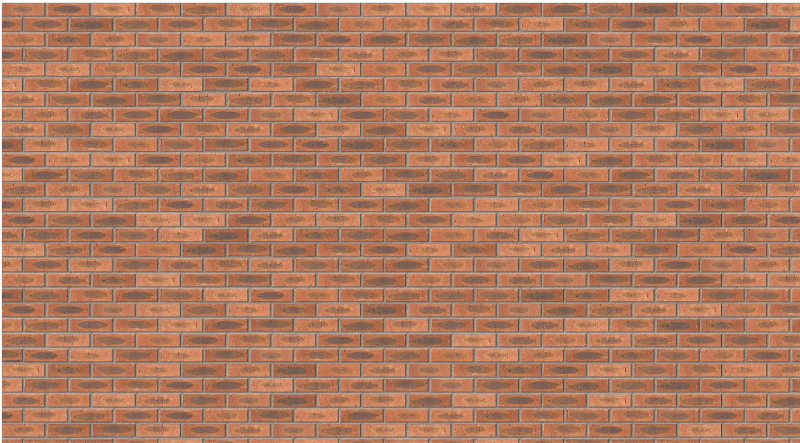


Product Information

Ibstock Code:	A2478A
Type:	Wirecut Extruded
Facing Description:	Rolled
Dry Brick Weight (kg):	1.9kg
Pack Quantity:	475
Packaging (standard):	Banded (Plastic) and Stretchwrap
Factory:	Dorket Head
EPD:	

Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm):	215x102x65
Size Tolerances Mean & Range:	T2 R1
Configuration:	Vertically Perforated
Voids (%):	NPD
Compressive Strength (N/mm²):	40
Active Soluble Salts:	S2
Water Absorption (% weight):	16
Durability:	F2
Gross Dry Density (Sound Insulation) (Kg/m³):	1390
Equivalent Thermal Conductivity "K" value 5% Exposed:	0.91
Initial Rate of Absorption (Suction Rate) (Kg/m²/min):	1.1
EAN:	5.03634E+12

Hardwicke Welbeck Red Mixture

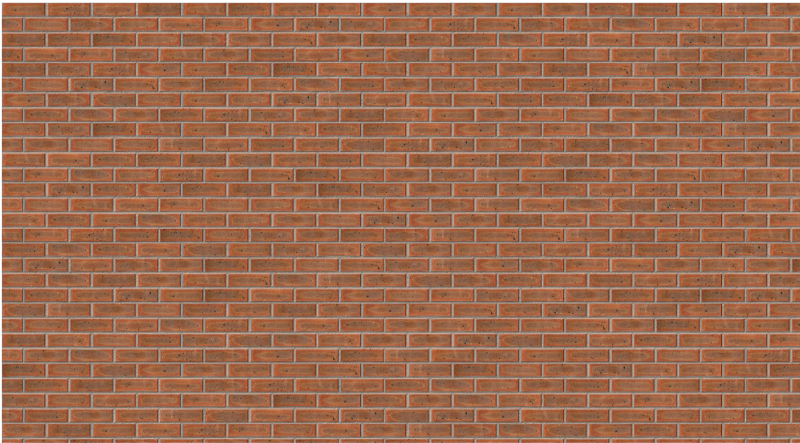


Product Information

Ibstock Code:	A2423A
Type:	Wirecut Extruded
Facing Description:	Rolled
Dry Brick Weight (kg):	1.9kg
Pack Quantity:	475
Packaging (standard):	Banded (Plastic) and Stretchwrap
Factory:	Dorket Head
EPD:	

Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm):	215x102x65
Size Tolerances Mean & Range:	T2 R1
Configuration:	Vertically Perforated
Voids (%):	NPD
Compressive Strength (N/mm²):	40
Active Soluble Salts:	S2
Water Absorption (% weight):	16
Durability:	F2
Gross Dry Density (Sound Insulation) (Kg/m³):	1390
Equivalent Thermal Conductivity "K" value 5% Exposed:	0.91
Initial Rate of Absorption (Suction Rate) (Kg/m²/min):	1.1
EAN:	5.03634E+12

Hardwicke Welbeck Red Mixture

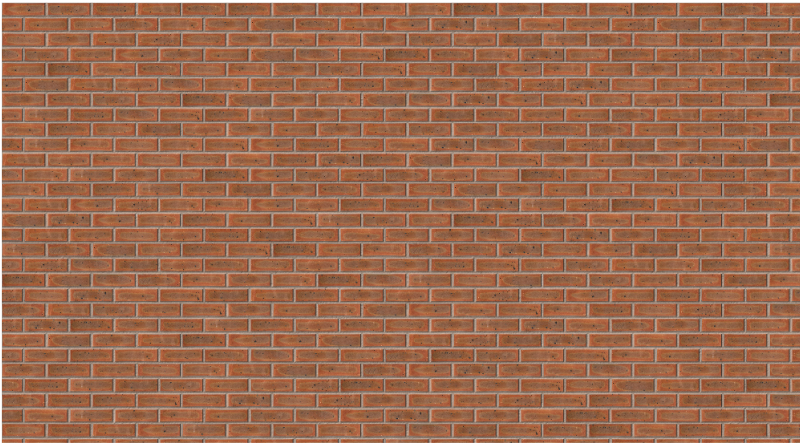

Product Information

Ibstock Code:	A2423A
Type:	Wirecut Extruded
Facing Description:	Rolled
Dry Brick Weight (kg):	1.9kg
Pack Quantity:	475
Packaging (standard):	Banded (Plastic) and Stretchwrap
Factory:	Dorket Head
EPD:	

Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm):	215x102x65
Size Tolerances Mean & Range:	T2 R1
Configuration:	Vertically Perforated
Voids (%):	NPD
Compressive Strength (N/mm²):	40
Active Soluble Salts:	S2
Water Absorption (% weight):	16
Durability:	F2
Gross Dry Density (Sound Insulation) (Kg/m³):	1390
Equivalent Thermal Conductivity "K" value 5% Exposed:	0.91
Initial Rate of Absorption (Suction Rate) (Kg/m²/min):	1.1
EAN:	5.03634E+12




BIM Objects
Download

Pembridge Red

Product Technical Information Sheet

Wienerberger Code	24190320
Production Plant	Sandown
Manufacture	Extruded Wirecut
Configuration	Vertically perforated unit
Colour	Red
Appearance	Rolled
Work Size (mm)	215 x 102.5 x 65
Pack Quantity	504
Individual Dry Brick Weight (kg)	1.9

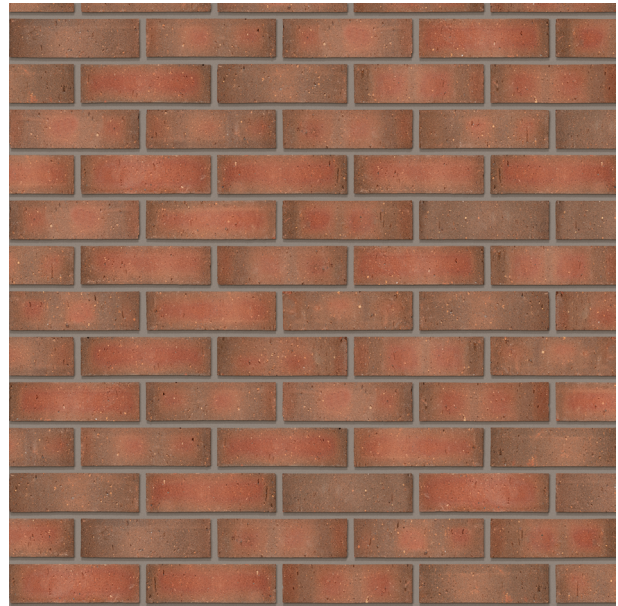

Technical Properties to BS EN 771-1

Size Tolerance (Mean/Range)	T2/R1
Percentage of Voids / Volume of Frogs	41
Gross Dry Density (kg/m ³ /Tolerance)	1320(D1)
Compressive Strength (N/mm ²)	60
Thermal Conductivity (W/(m·K)) λ_{10,dry,unit} Value (EN 1745 tabulated: S1)	P=90% 0.79
Durability Designation	F2
Water Absorption (%)	10
Initial Rate of Water Absorption (kg/(m ² ·min))	Min 0.1 Max 0.5
Active Soluble Salts	S2
Reaction to Fire	A1

Technical data correct at time of issue. Individual dry brick weights can vary and are for guidance only. Any questions regarding this data should be referred to the wienerberger Technical Department. Due to the limitations of screen and print colour representation of product images it is advised that brick samples are viewed prior to ordering.

e. Wall and Landscaping enquiries

t. 0161 491 8200

w. wienerberger.co.uk