


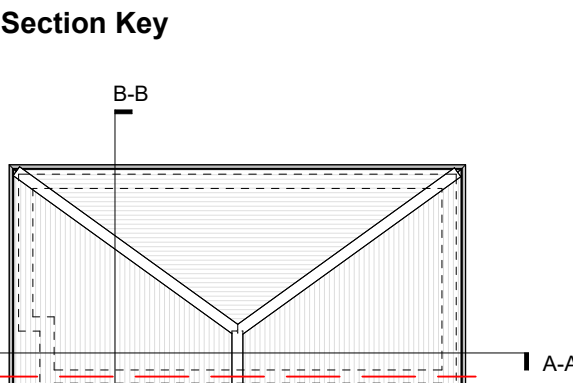

Materials Key

- Vapour Check / Vapour Barrier (Visqueen or Equal Approved) - All joints to be lapped by min 150mm and taped to prevent screw migration.
- Single Sided jointing tape (Visqueen or equal approved).
- Double Sided jointing tape (Visqueen or equal approved)
- Visqueen Zedex High Performance CPT DPC
- Visqueen Randon R400 Membrane to be installed above beam and block floor, all joints are to be minimised and lapped (min 150mm) in accordance with manufacturers recommendations and standard details.

NOTE: To be read in conjunction with S.E Drawings provided by SWF CONSULTANTS LTD issued on 16/12/20.
Detail subject to S.E. comment / approval.

NOTE: To be read in conjunction with SAP Assessor Report provided by Bridgewater Energy issued on 31/03/26.

Amended To Suit Eaves Detail	JL	Jun '26
Updated For Construction Issue	JL	Jun '26
Amendments made to intermediate floor build-up	JL	May '26
First Issue	JL	May '26

CONSTRUCTION

condy lofthouse
architects

ent

Salt Group Ltd

Subject
 Mrs. George Langdon Hunter

The Grove, Longview, Hutton

Proposed GA Section B-B - Plots 18-27

File	Date	Drawn by
------	------	----------

25@A1 May '26

Drawing No. Revision


5-023-158

17 Connect Business Village 0151 207 4371

Derby Road info@condyloffhouse.co.uk
Liverpool L5 9PR www.condyloffhouse.co.uk

Proposed Section B-B

PLOTS:
18, 19, 20, 21, 22 & 23



Unit 17 Connect Business Village
Derby Road
Leeds LS15 9PR

0151 207 4371
info@condyloffhouse.co.uk
www.condyloffhouse.co.uk