



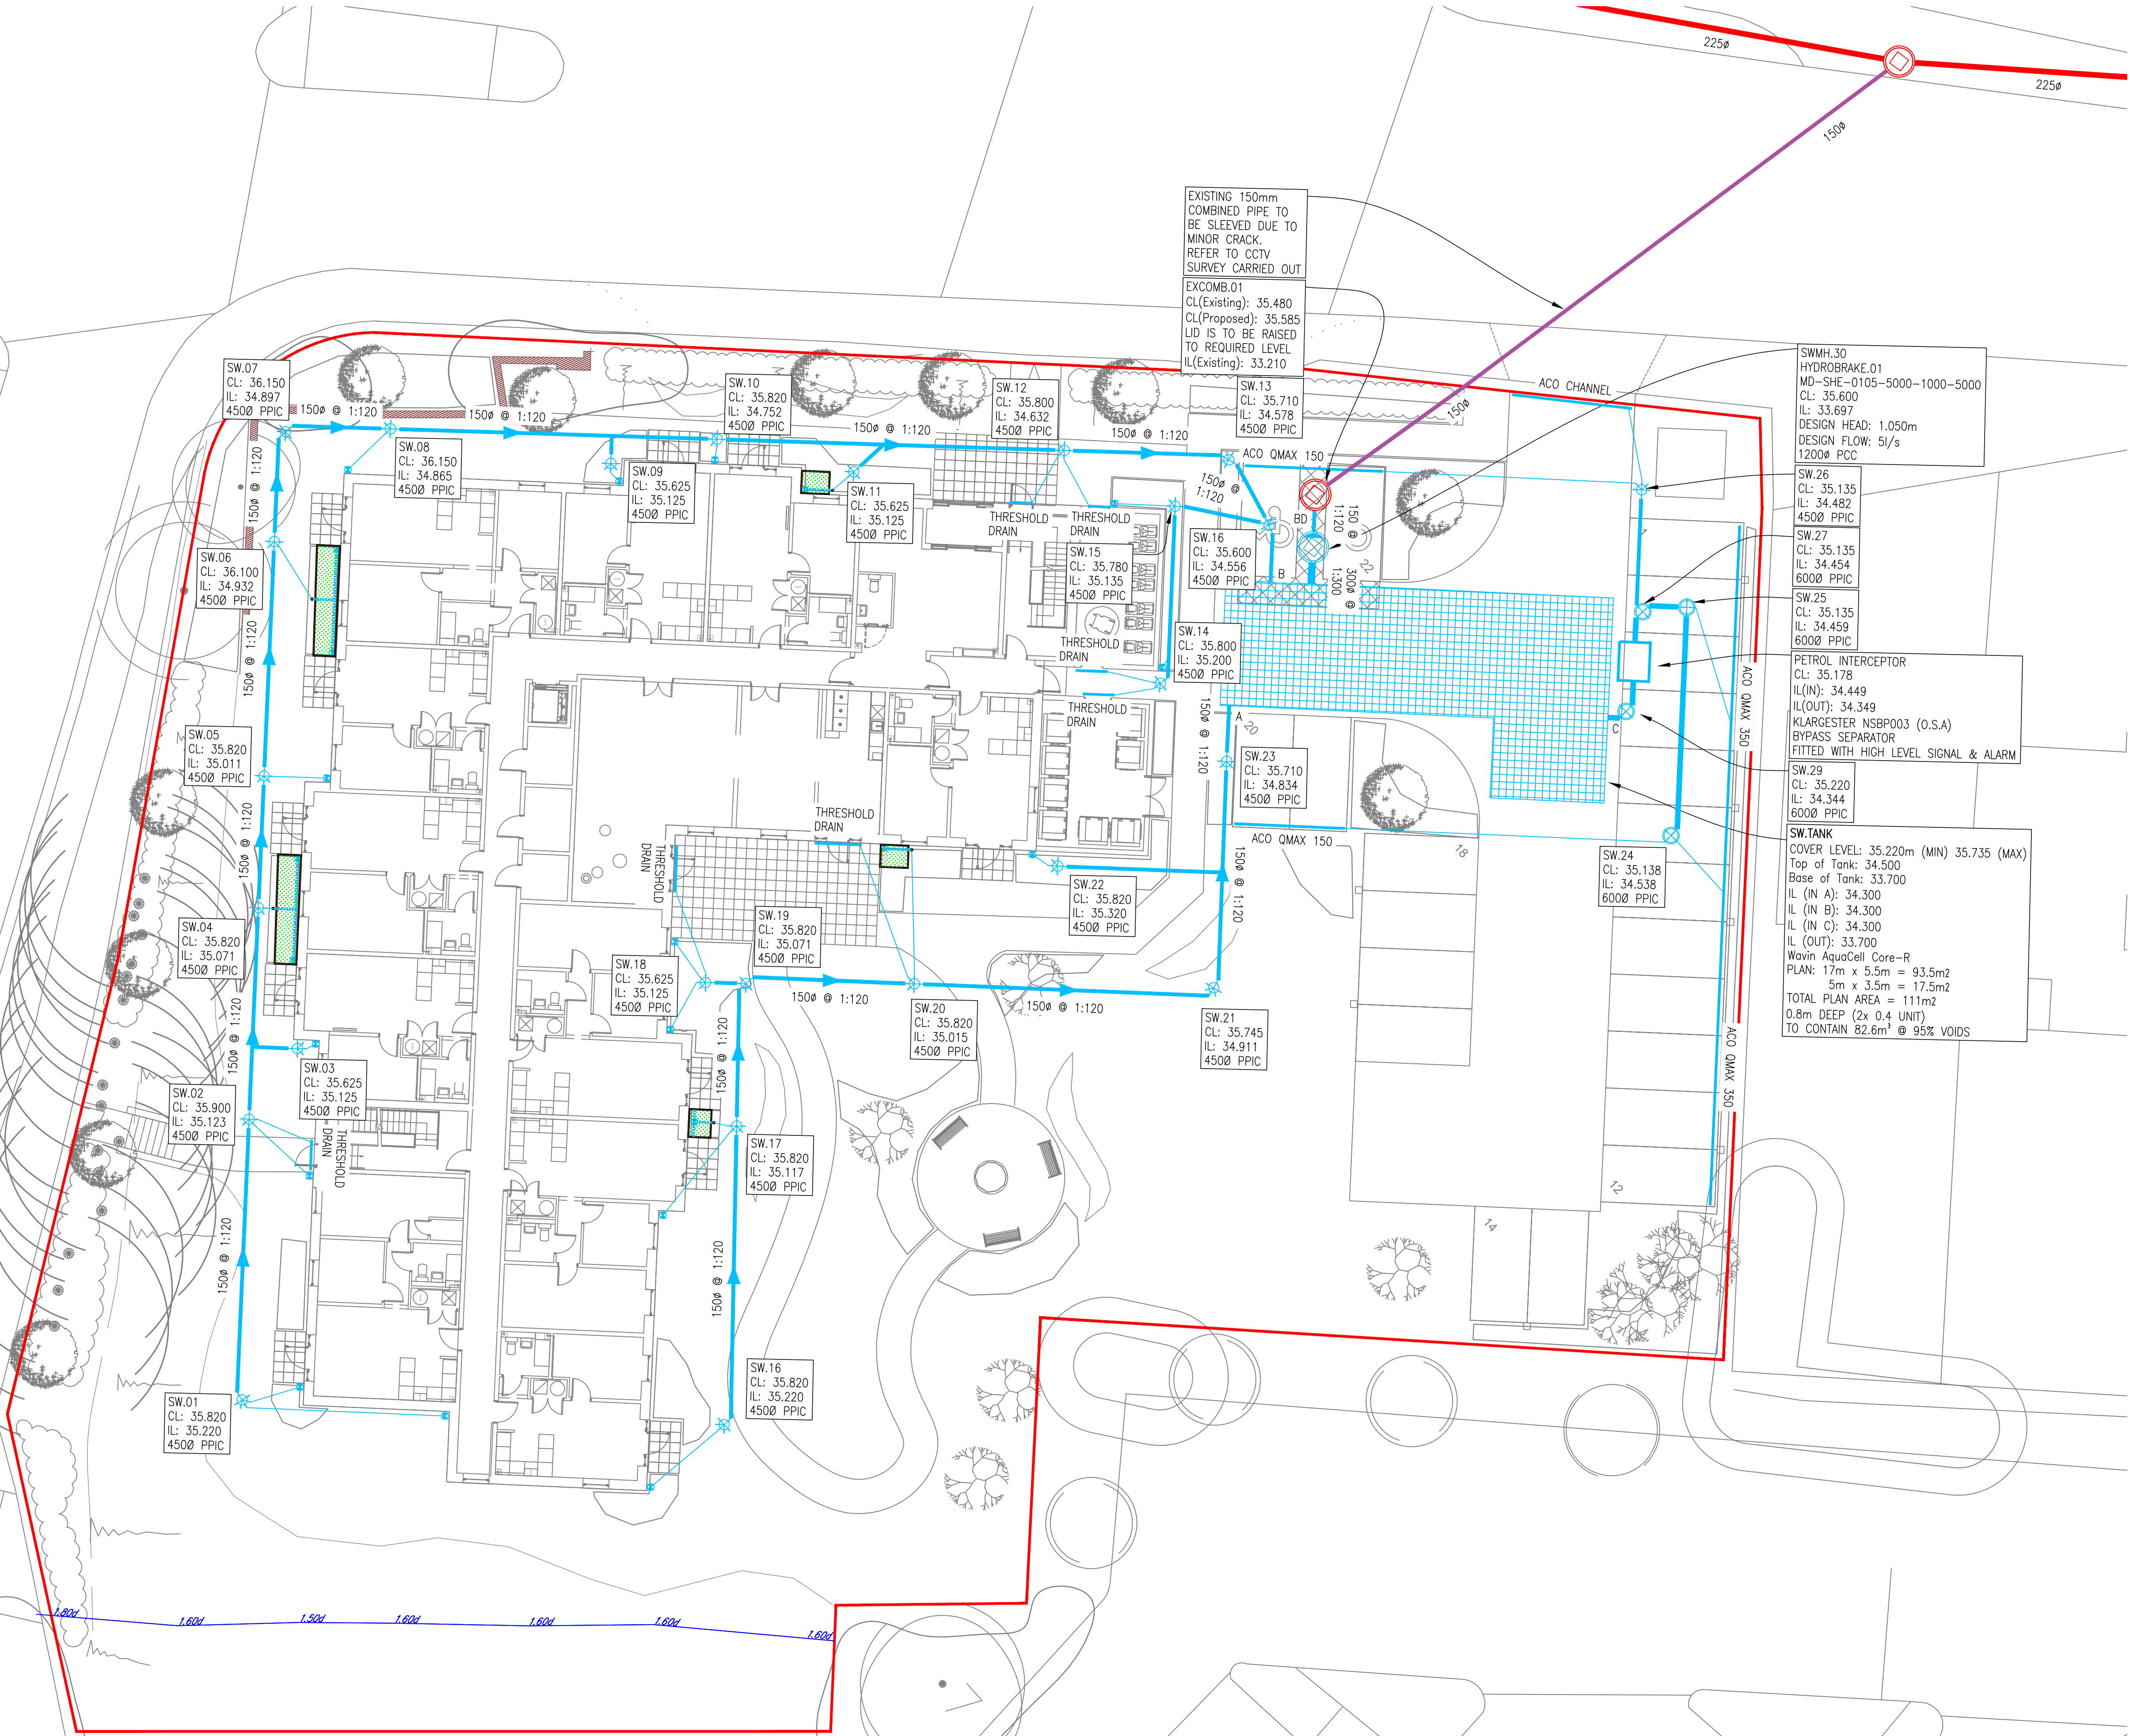

- NOTES:
1. All dimensions must be checked on site and not scaled from this drawing.
 2. The Contractor shall make a survey of the site and shall be responsible for obtaining all dimensions and levels necessary for the proper fabrication of the structure as indicated.
 3. All levels shown on this drawing are relative to Agreed Datum.
 4. This drawing is to be read in conjunction with 29652/100 Series Drawings.
 5. All existing invert levels are to be confirmed by contractor prior to construction. Connection subject to approval.
- Denotes Site Boundary
 - Denotes Proposed Surface Water Sewer
 - ⊕ Denotes Proposed Surface Water 4500 PPIC
 - ⊗ Denotes Proposed Cellular Storage Tank
 - ⊕ Denotes Proposed Rainwater Pipe
 - ⊕ Denotes Proposed HydroBrake Chamber
 - Denotes Existing Combined Water Sewer To Be Sleeved
 - Denotes Existing Combined Water Sewer
 - ⊕ Denotes Existing Combined Water Manhole Chamber
 - Denotes Existing Retaining Wall

D	05/06/23	ISSUED FOR APPROVAL	WP	WP
C	22/02/23	ISSUED FOR APPROVAL	WP	WP
B	07/02/23	ISSUED FOR APPROVAL	WP	WP
A	03/02/23	ISSUED FOR APPROVAL	WP	WP
Rev	Date	Description	DR	CH

© copyright

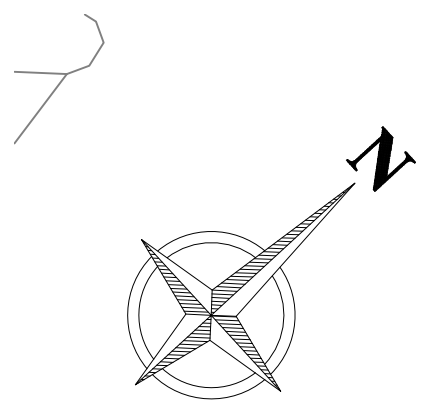

Registered



Qualified via Audit



GGP CONSULT

CONSULTING ENGINEERS
PROJECT MANAGEMENT

2 Hallam Road
Priory Park East
HULL HU4 7DY
United Kingdom

Telephone(+44) 01482 627963
Fax (+44) 01482 641736
Email info@ggpconsult.co.uk

Client **McCarthy Stone**
Life, we'll lived

Job Title
**Huyton Lane,
Huyton,
Liverpool**

Drawing Title
**Surface Water Drainage
Layout**

Status **APPROVAL**

Scale **1:150 @ A1** Date **Dec' 22**

Drawn By **W. Brown** Checked **W.B** Approved **J.H.C**

Dwg. No. **29652 / 105** Rev **D**

NOT FOR CONSTRUCTION