


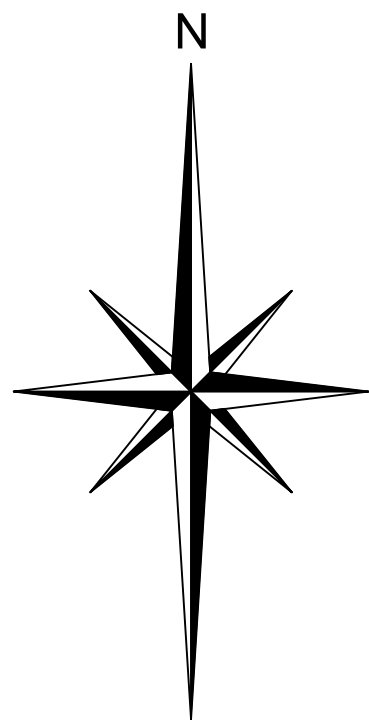

SITE

NOTE:
INTERNAL ROAD LAYOUT
TO SITE TO BE CONFIRMED.
EXISTING / PROPOSED SITE
LEVELS TO BE CONFIRMED.

NOTE:
EXTENT OF NEW HIGHWAY TO BE
ADOPTED TO BE CONFIRMED BY
KMBC HIGHWAYS

PROVIDE NEW DROPPED TACTILE
CROSSING TO NEW ENTRANCE
EXISTING FOOTWAY LEVELS TO BE
AMENDED TO SUIT NEW KERB LEVELS.

EXISTING FOOTWAY TO REMAIN.

EXISTING CROSSING POINT
AND TACTILES TO REMAIN.

EXISTING CYCLEWAY /
FOOTWAY TO REMAIN.

EXISTING FOOTWAY TO REMAIN.
NEW ENTRANCE INTO SITE TO BE
PROVIDED (TEMPORARILY FOR SITE
CONSTRUCTION TRAFFIC ONLY)

CENTRAL RESERVATION
TO REMAIN AS EXISTING

FIELD LANE

S50 KEY:-

DEVELOPERS SITE BOUNDARY

EXTENT OF S50 WORKS

- GENERAL NOTES
- A1.1 THIS DRAWING TO READ IN CONJUNCTION WITH ALL RELEVANT STRUCTURAL AND ARCHITECTURAL DRAWINGS AND SPECIFICATIONS.
- A1.2 ALL DIMENSIONS TO BE CHECKED ON SITE BY THE CONTRACTOR / FABRICATOR PRIOR TO COMMENCEMENT OF WORKS.
- A1.3 ALL DIMENSIONS ARE IN METRES UNLESS STATED OTHERWISE.
- A1.4 ALL WORKS TO BE CARRIED OUT IN STRICT ACCORDANCE WITH THE ENGINEER'S SPECIFICATIONS, RELEVANT BRITISH STANDARDS AND WHERE APPLICABLE LOCAL AUTHORITIES REQUIREMENTS.
- A1.5 ALL MATERIALS TO BE MARKED WITH BSI KITE MARK WHERE APPLICABLE.
- PROPOSED HIGHWAY WORKS
- HW1.1 ALL HIGHWAY WORKS TO BE DESIGNED AND CONSTRUCTED TO THE APPROVAL OF THE LOCAL AUTHORITY HIGHWAYS DEPARTMENT
- HW1.2 ALL ROAD OPENING NOTICES ETC... AS REQUIRED UNDER THE HIGHWAYS ACTS ARE TO BE OBTAINED PRIOR TO COMMENCEMENT OF WORKS ON SITE. ALL WORKS ARE TO BE INSPECTED BY THE LOCAL AUTHORITY, NHBC, OR NWWA AS APPLICABLE.
- HW1.3 THE DEVELOPER SHALL NOT COMMENCE ANY WORK WHICH AFFECTS THE PUBLIC HIGHWAY UNTIL ALL THE APPROVED TRAFFIC SAFETY AND MANAGEMENT MEASURES NECESSITATED BY THE WORKS ARE IN PLACE.
- HW1.4 THE DEVELOPER SHALL MAINTAIN ACCESS TO AND ALONG ALL EXISTING FOOTWAYS, PRIVATE ACCESSES, PUBLIC RIGHTS OF WAY AND PROPOSED CROSSINGS OF THE WORKS THROUGHOUT THE CONSTRUCTION PHASE.
- HW1.5 ALL MATERIALS SHALL BE TRANSPORTED & LAID IN ACCORDANCE WITH THE RECOMMENDATIONS OF THE APPROPRIATE CURRENT BRITISH STANDARD FOR THAT MATERIAL
- HW1.6 ALL GULLIES TO BE PROTECTED FROM SILT DURING THE CONSTRUCTION PROCESS WITH A LAYER OF HESSIAN SHEETING PLACED UNDER THE GULLY GRATING. THE HESSIAN SHALL BE CLEANED AND MAINTAINED THROUGHOUT THE CONSTRUCTION PERIOD.
- HW1.7 REFER TO SEPARATE DRAWINGS FOR ALL KERB / ROAD / FOOTPATHS NOTES AND DETAILS. REFER TO DRAWING ISSUE SHEET FOR A FULL LIST OF DRAWINGS.

DESIGN CONTINGENCY

FOR COST PURPOSES THE CONTRACTOR IS TO INCLUDE THE FOLLOWING CONTINGENCY (% OF PRIMARY CIVILS DESIGN COST) AT THE RELEVANT PROJECT STATUS INDICATED ON THE DRAWING.

RIBA STAGE 2 - CONCEPT DESIGN - 25%

RIBA STAGE 3 - SPATIAL COORDINATION - 15%

RIBA STAGE 4 - TECHNICAL DESIGN - 10%

RIBA STAGE 5 - PRODUCTION INFORMATION - 5%

P01	PRELIMINARY ISSUE	11.06.25	AJB	AD
Rev	Description	Date	By	Chkd

Drawing Status

PRELIMINARY DRAWING

 Sutcliffe

Structural & Civil Engineering
Geotechnical & Environmental Investigations
Building Surveying
Preliminary Planning Services

Liverpool Head Office: 0151 227 3115
Manchester Office: 0161 817 5180
South Wales Office: 01495 644111
London Office: 020 8014 4205

www.sutcliffe.co.uk

Client

GREEN CIRCLE ESTATES LTD

Project

KIRKBY VALLEY GOLF CLUB
LIVERPOOL
PROPOSED NEW ENTRANCE

Drawing Title

SECTION 50 PHASE 1
AGREEMENT PLAN

Date	JUNE 2025	Drawn By	AJB	Checked By	AD
Scale at A1	1:200	Project Number	34781	Status	
Sheet Number	34781-SUT-ZZ-XX-DR-C-6500				

Revision

P01

