


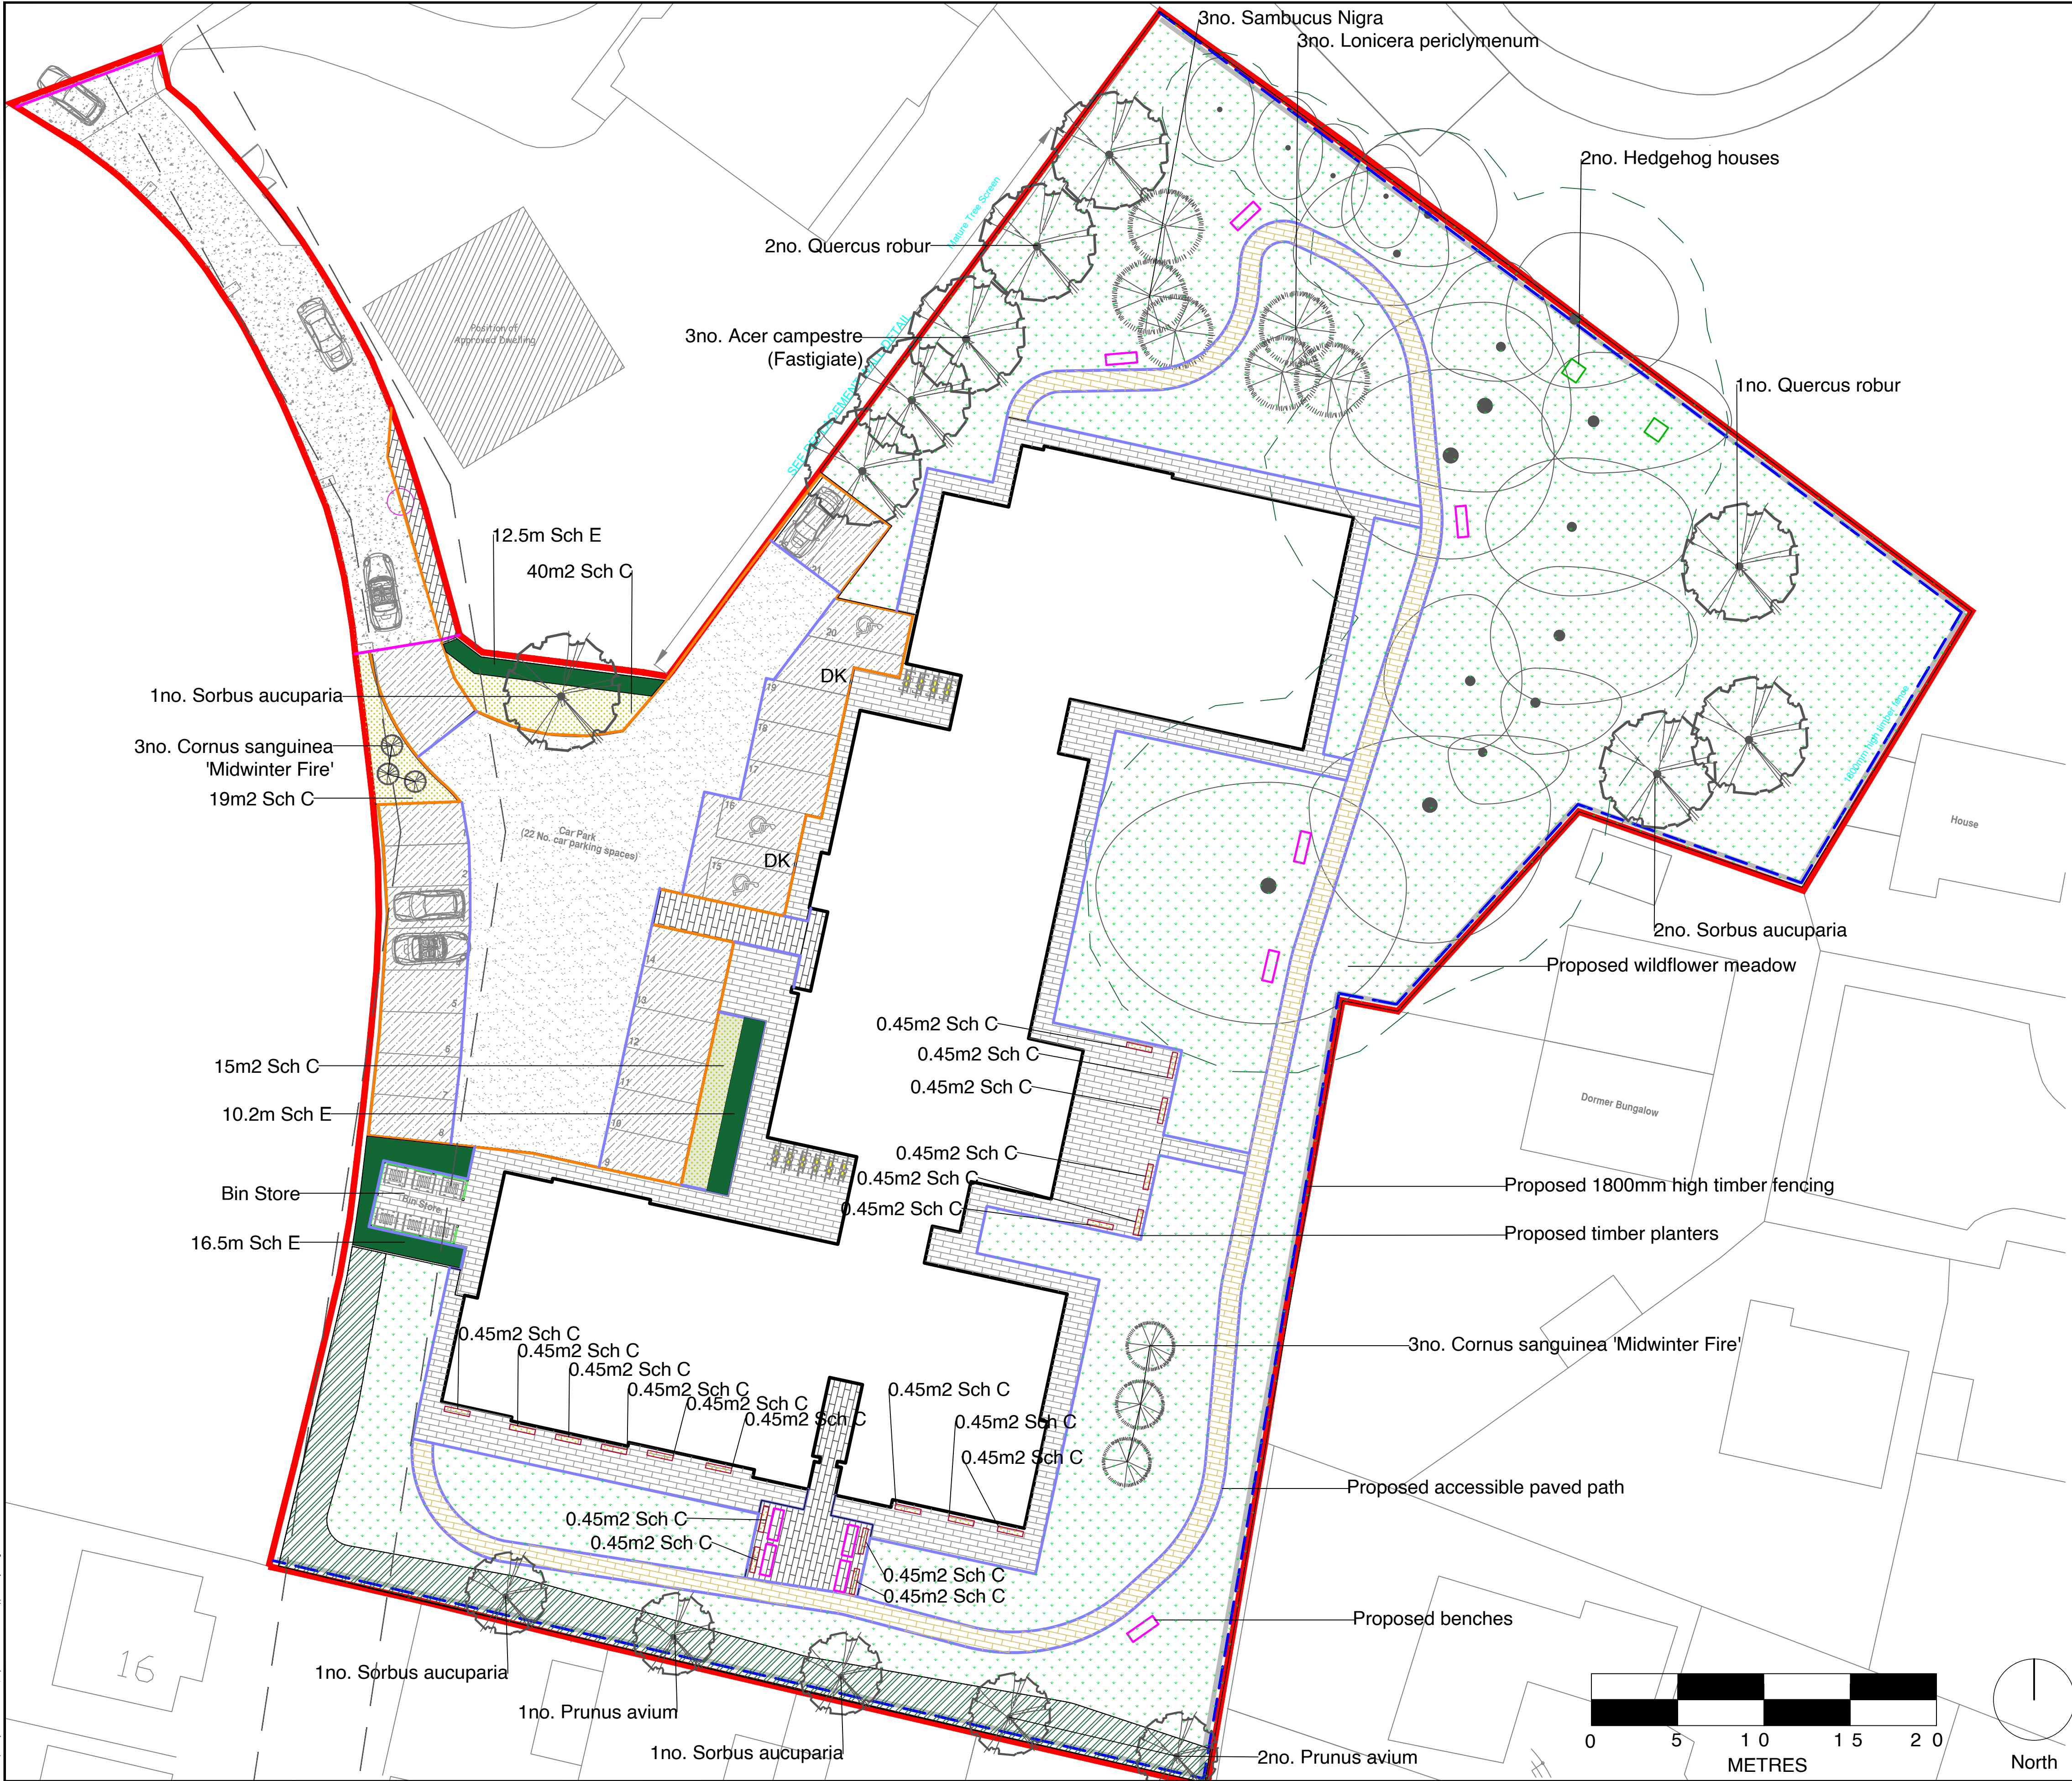

KEY

- Site Boundary
- Existing Trees
- Tree Root Protection Area
- 3m Easement to Existing Sewer

SOFT

- Proposed Native Trees
- Proposed Native Shrub Planting
- Proposed Wildflower Mix - Emorsgate EM1
- Proposed Single Species Native Hedgerow
- Proposed Native Hedge Mix
- Proposed Low Shrub Planting

HARD

- Proposed Rolled Stone Surfacing to Access Black Basalt Aggregate by CED Stone or equally approved
- Proposed Tarmac to Car Park
- Proposed Permeable Paving to Car Park
- Proposed Paving to Entrance
- Proposed Paving Around Building
- Proposed Granite Setts to Access Road
- Proposed Kerb with Upstand
- Proposed Drop Kerb
- Proposed Pin Kerb Laid Flush
- Proposed Benches
- Proposed Hedgehog House
- Proposed Timber Fencing
- Proposed Timber Planter

Schedule A - Proposed Native Tree Planting

Plant Name	Specification	%mix	m	density	Total Plants
Acer campestre (fastigate)	10L, 14-16m, 4.5 - 6m height, FB	-	-	As Shown	3
Prunus avium	10L, 14-16m, 3.5 - 4m height, FB	-	-	As Shown	3
Quercus robur	10L, 14-16m, 3.5 - 4m height, FB	-	-	As Shown	3
Sorbus aucuparia	10L, 14-16m, 3.5 - 4.5m height, Container grown	-	-	As Shown	5
Total					14

Schedule B - Proposed Native Shrub Planting

Plant Name	Specification	%mix	m	density	Total Plants
Cornus sanguinea 'Midwinter Fire'	10L, 14-16m, Container grown, 50-70cm	-	-	As Shown	6
Lonicera periclymenum	3L, 14-16m, Container grown, 60-80cm	-	-	As Shown	3
Sambucus nigra	2L, 14-16m, Container Grown, 80-100cm	-	-	As Shown	3
Total					12

Schedule C - Proposed Low Shrub Planting

* Species to be planted in species groups of 5-7 plants to natural drifts

Plant Name	Specification	%mix	m2	density	Total Plants
Rosmarinus officinalis 'Prostratus'	2L, 14-16m, Container grown	35	29	5	145
Thymus serpyllum	2L, 14-16m, Container grown	35	29	5	145
Salvia officinalis 'Purpureascent'	2L, 14-16m, Container grown	30	25	4	100
Total Area					390

Schedule D - Proposed Native Hedge Mix

* Species to be planted in double staggered rows at 7 per linear metre

Plant Name	Specification	%mix	Linear m	density per m	Total Plants
Crataegus monogyna	1+1 bare root, 40-60cm whip	20	14	7	101
Ficus sylvatica	1+1 bare root, 40-60cm whip	25	18	7	126
Lonicera periclymenum	1+1 bare root, 40-60cm whip	15	11	7	76
Prunus spinosa	1+1 bare root, 40-60cm whip	25	18	7	126
Viburnum opulus	1+1 bare root, 40-60cm whip	15	11	7	76
Total Length					504

Schedule E - Proposed Single Species Native Hedge

* Species to be planted in double staggered rows at 7 per linear metre

Plant Name	Specification	%mix	m	density per m	Total Plants
Carpinus betulus	2L, 14-16m, 50-80cm	100	-	7	274
Total Linear Meters					274

Schedule F - Proposed Wildflower Mix

Plant Name	Specification	%mix	m	density per m	Total Grams
Emorsgate EM1	General purpose meadow mixture, sown at 4g/m2	100	-	-	9440
Total m2					2360

Rev	Description	Date	By	CHK'd
A	Planters relocated	25.03.22	HA	KR
B	Additional trees included	29.06.22	HA	KR
C	Tree species amended	08.08.22	HA	KR
D	Additional planting and surfacing amendments	18.08.22	HA	KR
E	Tree species and access updated	20.09.22	HA	KR

© This drawing is the property of Land Studio and the information can only be reproduced with their prior permission

Reproduced from Ordnance Survey material with the permission of the controller of Her Majesty's Stationary Office under the Licence No 186287

client: ALDERLEY_GROUP
project: THE_ORCHARD_HUYTON
drawing title: LANDSCAPE_PLAN
(PREVIOUSLY_APPROVED_SCHEME)

land|studio
scale: @ A1 1:200
date: 22.03.2022
dm: HA
chk'd: KR
0201
E