


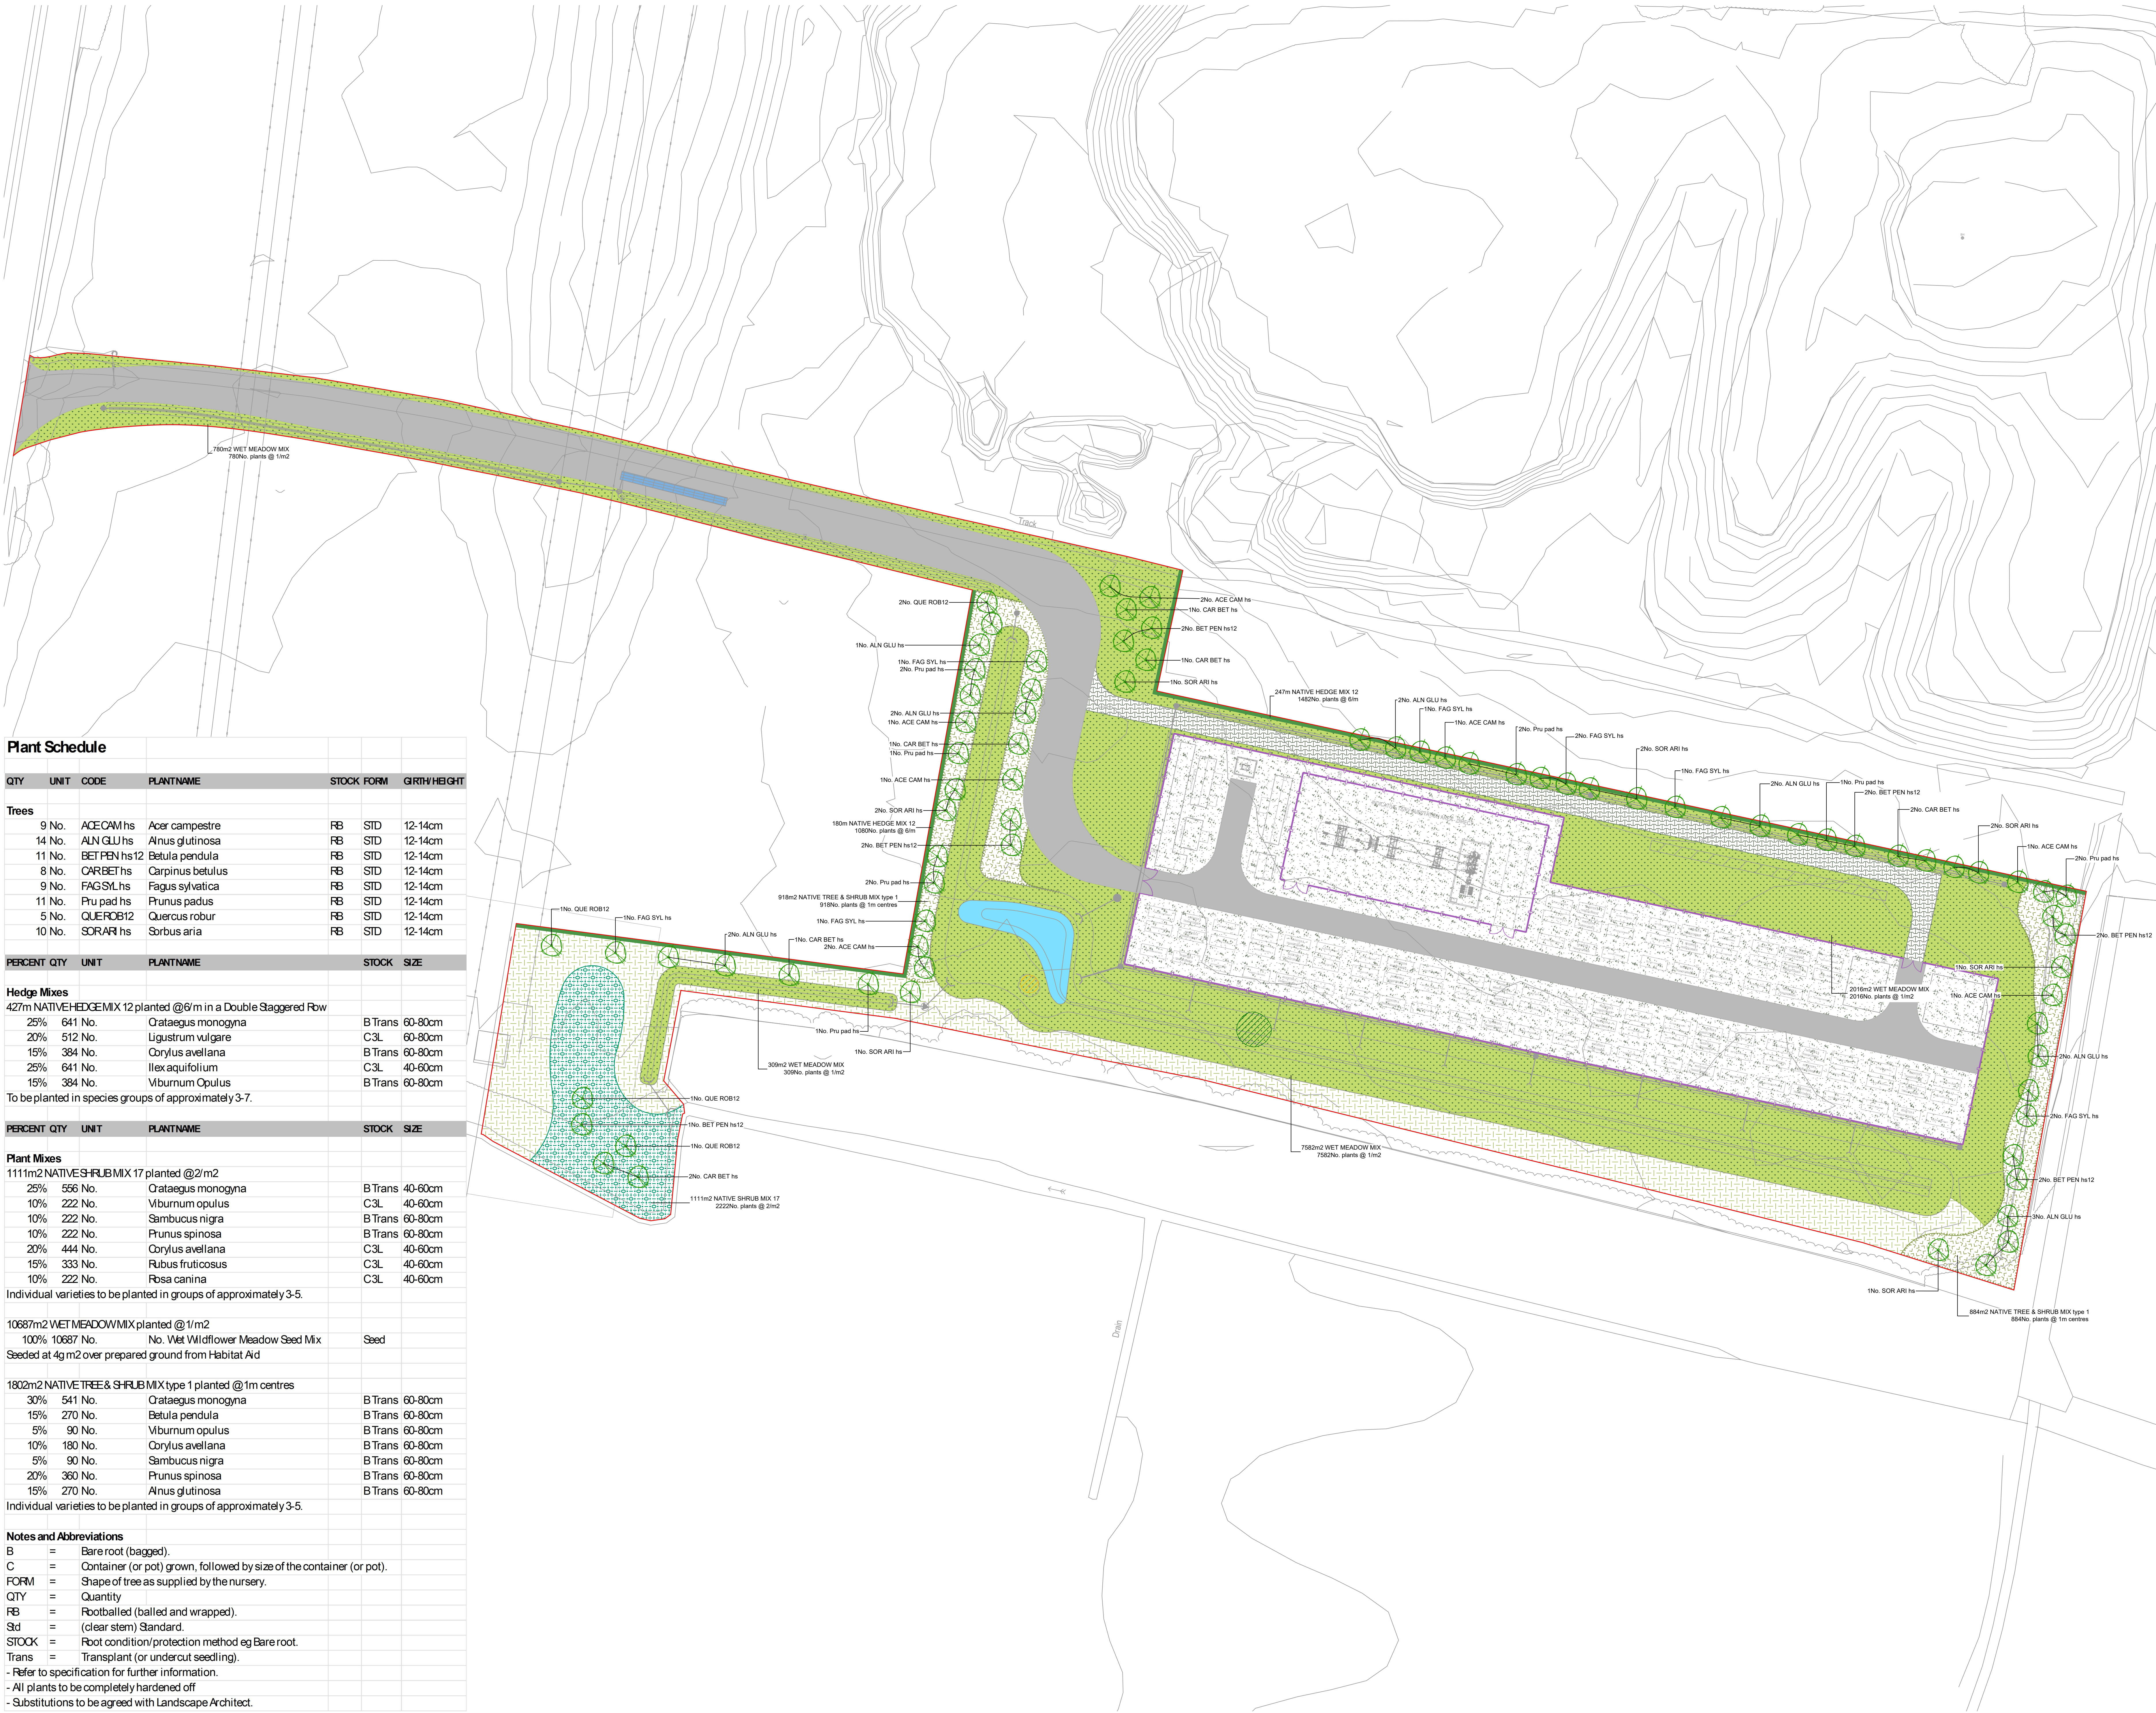

Plant Schedule

QTY	UNIT	CODE	PLANTNAME	STOCK	FORM	GRTH/HEIGHT
Trees						
9 No.	ACE	C4M	hs	Acer campestre	FB	STD 12-14cm
14 No.	ALN	GLU	hs	Alnus glutinosa	FB	STD 12-14cm
11 No.	BET	PEN	hs12	Betula pendula	FB	STD 12-14cm
8 No.	CAR	BET	hs	Carpinus betulus	FB	STD 12-14cm
9 No.	FAG	SYL	hs	Fagus sylvatica	FB	STD 12-14cm
11 No.	Pru	pad	hs	Prunus padus	FB	STD 12-14cm
5 No.	QUE	ROB	12	Quercus robur	FB	STD 12-14cm
10 No.	SOR	ARI	hs	Sorbus aria	FB	STD 12-14cm

PERCENT	QTY	UNIT	PLANTNAME	STOCK	SIZE
Hedge Mixes					
427m NATIVE HEDGE MIX 12 planted @6'm in a Double Staggered Row					
25%	641 No.		Crataegus monogyna	B Trans	60-80cm
20%	512 No.		Ligustrum vulgare	C3L	60-80cm
15%	384 No.		Corylus avellana	B Trans	60-80cm
25%	641 No.		Ilex aquifolium	C3L	40-60cm
15%	384 No.		Viburnum Opulus	B Trans	60-80cm

To be planted in species groups of approximately 3-7.

PERCENT	QTY	UNIT	PLANTNAME	STOCK	SIZE
Plant Mixes					
1111m2 NATIVE SHRUB MIX 17 planted @2/m2					
25%	556 No.		Crataegus monogyna	B Trans	40-60cm
10%	222 No.		Viburnum opulus	C3L	40-60cm
10%	222 No.		Sambucus nigra	B Trans	60-80cm
10%	222 No.		Prunus spinosa	B Trans	60-80cm
20%	444 No.		Corylus avellana	C3L	40-60cm
15%	333 No.		Rubus fruticosus	C3L	40-60cm
10%	222 No.		Rosa canina	C3L	40-60cm

Individual varieties to be planted in groups of approximately 3-5.

10687m2 WET MEADOW MIX planted @1/m2					
100%	10687 No.		No. Wet Wildflower Meadow Seed Mix	Seed	
Seeded at 4g m2 over prepared ground from Habitat Aid					

1802m2 NATIVE TREE & SHRUB MIX type 1 planted @1m centres					
30%	541 No.		Crataegus monogyna	B Trans	60-80cm
15%	270 No.		Betula pendula	B Trans	60-80cm
5%	90 No.		Viburnum opulus	B Trans	60-80cm
10%	180 No.		Corylus avellana	B Trans	60-80cm
5%	90 No.		Sambucus nigra	B Trans	60-80cm
20%	360 No.		Prunus spinosa	B Trans	60-80cm
15%	270 No.		Alnus glutinosa	B Trans	60-80cm

Individual varieties to be planted in groups of approximately 3-5.

Notes and Abbreviations

- B = Bare root (bagged).
- C = Container (or pot) grown, followed by size of the container (or pot).
- FORM = Shape of tree as supplied by the nursery.
- QTY = Quantity
- FB = Rootballed (balled and wrapped).
- Std = (clear stem) Standard.
- STOCK = Root condition/protection method eg Bare root.
- Trans = Transplant (or undercut seedling).
- Refer to specification for further information.
- All plants to be completely hardened off
- Substitutions to be agreed with Landscape Architect.

Do not scale this drawing (printed or electronic version).
Contractors must check all dimensions from site.
This drawing is copyright and is for use on this site only. This drawing should be read in conjunction with all relevant consultants drawings and specialist subcontractors / supply chain drawings and specifications.
All works to be carried out in accordance with the latest British Standards / Codes of Practice unless specifically directed otherwise in the specification.
Responsibility for the reproduction of this drawing in paper form, or issued in electronic format, lies with the recipient to check that all information has been replicated in full and is correct when compared to the original paper or electronic image.
Graphical representations of equipment on this drawing have been co-ordinated, but are approximations only. Please refer to the specifications and / or details for actual sizes and / or specific contractor construction information.

Notes:-

KEY

- Application Site Red Line Boundary
- Hard Landscape
 - Vehicular Asphalt Surface
To engineer specification & recommendation
 - Natural Looking Surface Material
To appropriate specification
 - Permeable Paving
To appropriate specification
 - 2.4m High Security Fence
Green colour
- Soft Landscape
 - Existing Tree and Shrub Planting
To be retained and enhanced
 - Native Tree
Heavy standard tree
 - Existing Tree
To be removed
 - Existing Tree
To be retained
 - Native Woodland Mix Planting
Shrubs and tree whips
 - Proposed Wet Wildflower Meadow
 - Proposed Native Hedge Planting
 - Proposed Native Shrub Planting
 - Existing Grassland
To be retained and enhanced

P07	20/06/25	UPDATED TO COMMENTS	TH	SW
P06	03/06/25	UPDATED TO COMMENTS	MA	SW
P05	29/05/25	UPDATED TO COMMENTS	MA	SW
P04	21/05/25	LAYOUT UPDATE	MA	SW
P03	07/05/25	BNG UPDATE	SA	ME
P02	14/04/25	SECOND ISSUE	SW	ME
P01	15/09/23	FIRST ISSUE	TH	ME
REV.	DATE	DESCRIPTION	DRAWN	CHK'D



A: Ground Floor, The Tower,
Deva City Office Park, Trinity Way,
Manchester M3 7BF

T: +44 (0) 161 312 3131

weareurbangreen.co.uk

Client:			BALANCE POWER	
Project:			SANDY BROW LANE,KIRKBY	
Title:			GENERAL ARRANGEMENT PLAN	
Issue:			PLANNING	
Drawn:	TH	Checked:	SA	Approved: ME
Project:	UG2142	Scale @ A0:	1:500	Date: 15/09/23
Dwg No:	UG_2142_LAN_GA_DRW_01	Revision:	P07	