



Key

Application Site Boundary

Decorative Gravel Laid Over Geotextile Membrane.

Refer to Infrastructure Proposals GL1859 01c-05C for details.

PLANT SCHEDULE

Trees

Abbr	Species	Supply	Size	Girth	Number
AMARH	Amelanchier arborea 'Robin Hill'	EHStd: R8	425-600cm	14-16cm	21
BEJACA	Betula utilis jacquemontii	EHStd: R8	425-600cm	14-16cm	1
MAGKI	Magnolia kobus '85'	EHStd: R8	425-600cm	14-16cm	12
					Total: 34

Specimen Shrubs & Climbers

Abbr	Species	Pot Size	Height	Habit	Number
EUOJABR	Euonymus japonicus 'Bravo'	25L	100-125cm	Bushy	6
LECCA	Ilex crenata	25L	100-125cm	Topiary cone	10
PHOEJ	Phormium 'Jester'	25L	100-125cm	Tip Cm	12
PHOWAVA	Phormium 'Yellow Wave'	25L	100-125cm	Tip Cm	22
PHOHALS	Photinia fraseri 'Red Robin'	25L	150-175cm	Topiary half std.	20
PHORRER	Photinia x fraseri 'Red Robin'	70-90L	225-250cm	Standard: 12-14cm girth	10
					Total: 80

Single Species Hedgerows


Abbr	Species	Pot Size	Height	Habit	Density	Number
PRULU	Prunus laurocerasus	10L	80-100cm	Bushy	0.4Cm	1874
						Total: 1874

Shrubs

Abbr	Species	Pot Size	Height	Habit	Density	Number
AUCVARA	Aucuba japonica 'Variegata'	10L	60-80cm	Bushy	0.7Cm	191
BRASU	Brachyglottis 'Sunshine'	10L	40-60cm	Bushy	0.7Cm	66
CEATHR	Ceanothus thyrsiflorus repens	10L	40-60cm	Bushy	0.7Cm	46
CHOPAP	Chorizanthe 'Aster Pearl'	10L	40-60cm	Bushy	0.7Cm	10
CHOTE	Chorizanthe 'Sundance'	10L	40-60cm	Bushy	0.7Cm	45
CHOTES	Chorizanthe 'Sundance'	10L	40-60cm	Bushy	0.7Cm	435
EUOFOEG	Euonymus fortunei 'Emerald 'n' Gold'	10L	30-40cm	Bushy	0.7Cm	79
EUOFOEG	Euonymus fortunei 'Emerald Gaiety'	10L	30-40cm	Bushy	0.5Cm	99
EUOFOEG	Euonymus fortunei 'Emerald Gaiety'	10L	30-40cm	Bushy	0.7Cm	6
FALJA	Fatsia japonica	10L	60-80cm	Bushy	0.7Cm	191
HEBGLOA	Hebe 'Autumn Glory'	10L	40-60cm	Bushy	0.7Cm	3
HEBMAR	Hebe 'Marjorie'	10L	40-60cm	Bushy	0.7Cm	68
HEBMW	Hebe 'Mrs Winder'	10L	40-60cm	Bushy	0.7Cm	9
HEBPQ	Hebe 'Purple Queen'	10L	40-60cm	Bushy	0.7Cm	184
HEBALRE	Hebe 'Robinsoniana' 'Red Edge'	10L	30-40cm	Bushy	0.7Cm	80
HEBRVA	Hebe 'Robinsoniana' 'Variegata'	10L	40-60cm	Bushy	0.7Cm	61
HEBPS	Hebe pinguifolia 'Sutherland'	10L	30-40cm	Bushy	0.7Cm	128
HEU PAL	Heuchera micrantha 'Palace Purple'	10L	30-40cm	Bushy	0.5Cm	97
HYPHH	Hypericum 'Hidcote'	10L	40-60cm	Bushy	0.7Cm	65
LAVANNE	Lavandula angustifolia 'Hidcote'	10L	30-40cm	Bushy	0.7Cm	88
LAVANMU	Lavandula angustifolia 'Munstead'	10L	30-40cm	Bushy	0.7Cm	112
LAVANVE	Lavandula angustifolia 'Vera'	10L	30-40cm	Bushy	0.7Cm	221
LOHNBG	Lonicera nitida 'Baggesen's Gold'	10L	40-60cm	Bushy	0.7Cm	5
MIS ZEB	Miscanthus 'Zebra'	10L	40-60cm	Bushy	0.7Cm	3
PHORRER	Photinia fraseri 'Red Robin'	10L	80-100cm	Bushy	0.7Cm	191
PITTEIT	Pittosporum tenuifolium 'Tom Thumb'	10L	30-40cm	Bushy	0.7Cm	174
PITTEVA	Pittosporum tenuifolium 'Variegatum'	10L	40-60cm	Bushy	0.7Cm	191
PRULACL	Prunus laurocerasus 'Otto Luyken'	10L	60-80cm	Bushy	0.7Cm	135
ROSOF	Rosmarinus officinalis	10L	40-60cm	Bushy	0.7Cm	249
SARIORHU	Sarcococca humilis	10L	30-40cm	Bushy	0.7Cm	5
SKICOEG	Skimmia confusa 'Kew Green'	10L	40-60cm	Bushy	0.5Cm	97
SKIJARU	Skimmia japonica 'Rubell'	10L	40-60cm	Bushy	0.7Cm	113
SKICOEG	Skimmia x confusa 'Kew Green'	10L	40-60cm	Bushy	0.5Cm	14
SPJAAW	Sapraea japonica 'Anthony Waterer'	10L	40-60cm	Bushy	0.7Cm	3
SPGCLB	Sapraea japonica 'Gold Mound'	10L	40-60cm	Bushy	0.7Cm	24
VIDBA	Viburnum davidii	10L	40-60cm	Bushy	0.7Cm	43
					Total: 3525	

Turf Areas

Seed Mix Name	Seed Mix Supplier
Medallion turf	Rotolun Ltd

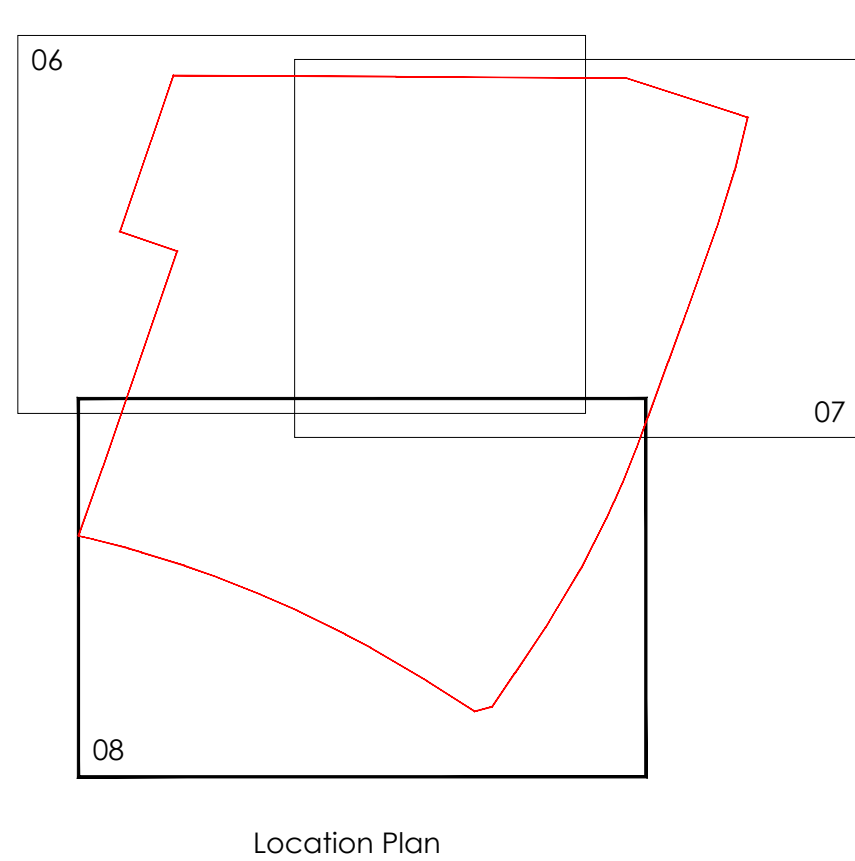

Specification Notes:

All plants shall conform to BS 3936 and be in accordance with the National Plant Specification. Supplying nurseries shall be Registered under the HTA Nursery Certification Scheme. All plants shall be packed and transported in accordance with the Code of Practice for Plant Handling as produced by CPSE.

No species, variety, size or position to be amended without the Landscape Architects prior approval.

If the formation level is compacted it should be ripped through before topsoiling. Topsoil depths to be 300mm for shrub beds and 150mm for grass areas.

All landscape proposals must be referred to by the Structural Engineer during foundation design.

All planting has been indicated making every effort to avoid conflict with Highway land. Prior to submission it is the clients responsibility to ensure that all landscaping is reviewed by the project manager/highway engineer to ensure there is no conflict with highway land and future adaptations.

Before trees are planted, the Landscape Contractor shall ascertain the location of drains from the site manager, and shall if necessary make minor adjustments to tree positions to ensure that they are planted at least 1.5m from drains. They should however be planted no closer to houses/garages than is shown on the drawing, and if shown located in shrub beds, the shape of the latter should be adjusted if necessary to accommodate the revised tree position.

If planting conditions are particularly poor e.g. waterlogged/frozen ground or poor soils, the Site Manager must be notified. All works will halt until conditions are considered acceptable.

All planting must be mulched to a depth of 75mm and in accordance with horticultural best practice guidelines ensuring plants are not buried.

All bare root stock shall be root dipped in an approved water-retaining polymer. If planting is required outside the October-March season, bare root trees will be replaced by a containerised equivalent to be approved by the project landscape architect.

Planting in pedestrian visibility splays: Any planting stock specified in pedestrian visibility splays and exceeding 0.60m in height is to be cut down to 0.45m in height at the time of planting. It shall be maintained at a height not exceeding 0.60m in height in perpetuity.

Trees: All tree locations and species must be taken into consideration by the project Structural Engineer to ensure that foundation design accords with the specifications set out under Chapter 4.2 of the NBS Standards. It is the Contractors responsibility to ensure that all underground services have been located and identified in advance of free pit excavation. No tree species/location/specification will be amended without prior approval from the project Landscape Architect and/or the Client. Root barriers are to be provided as directed by the project engineer. All trees to be supplied with a minimum 1.8m clear stem unless clearly stated otherwise.

Specimen Shrubs: All specimen shrubs to be planted in accordance with horticultural best practice guidelines. No feature shrub or climbers species, size or location should be altered without prior approval from the Landscape Architect. Planting beds to be mulched with 75mm layer of bark.

Hedgerows: All ornamental hedgerow shrubs to be planted in accordance with horticultural best practice guidelines. No hedgerow shrub species, size or location should be altered without prior approval from the Landscape Architect. Planting beds to be mulched with 75mm layer of bark.

Turf & Seeding: All turf and seeding to be completed in line with horticultural best practice. Seed to be applied at the rates (g/m2) advised by manufacturer/supplier.

Shrubs & herbaceous (on plot): All ornamental and amenity shrubs to be planted in accordance with horticultural best practice guidelines. No shrub species, size or location should be altered without prior approval from the Landscape Architect. Individual species to be planted in groups of 3-7 within mixed species beds. Planting beds to be mulched with 75mm layer of bark.