

Fittings / LED Wallpacks


Lumo 25W LED CCT Asymmetric Wallpack in Emergency with Photocell



Designed to be used where the aesthetics of the light fitting, along with a tough robust construction is needed. The fittings are IP66 and IK8 compliant, supplied complete with an opal diffuser for even light distribution. Available in Standard / Photocell / Emergency / Emergency Photocell versions.

- CCT 3/4/6000K.
- Genuine replacement for 50W Metal Halide & Sodium.
- TUV Certified Driver.
- High impact polycarbonate lens.
- 50% energy saving.
- 50000 hours.

Technical Specification

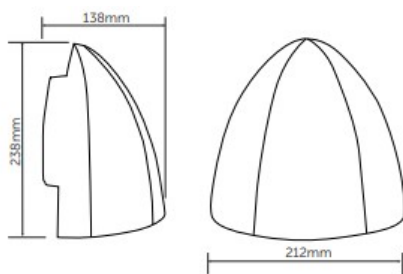

Product Code	11503
---------------------	-------

Reference

Guarantee	7 Years
EAN	5013588115030
Commodity Code	9405423170
Country of Origin	CN
UNSPSC Code	39111612

Technical Specification

Volts (V)	220/240
Watts (W)	13/16/18/20/25
Colour Temp (K)	3000/4000/6000
Dimmable?	No
Lumens (lm)	1495-3500
Life Hours	50000
CRI (ra)	80
Switching Cycles	50000
Frequency (Hz)	50/60
LED Drive Current	78mA
Energy Consumption (kWh/1000h)	25
IP Rating	IP66
Impact Protection	IK8

Dimensions

Height (mm)	238
Width (mm)	212
Depth (mm)	138

Packaging Information

Single Carton Height (mm)	260
Single Carton Width (mm)	235
Single Carton Depth (mm)	160
Single Carton Weight (kg)	2.2
Individual Volume	0.00978
Outer Box Height (mm)	500
Outer Box Width (mm)	355
Outer Box Depth (mm)	280

Fittings / LED Street Lights

Alto 75W LED IP66 Street Light with Nema Socket - 4000K




The Alto LED Street Light offers flexibility, it is suitable for use in many locations, including rural towns, car parks and access roads. The Alto is available in a variety of wattages for a variety of applications, and is a robust weatherproof construction meeting an IP66 protection rating.

- 150 lm/W.
- Genuine Replacement for 70W Son or Metal Halide.
- Ideal for car parks and pedestrian walkways.
- Reduced light pollution.
- Precision lens system directs light only where it is needed, reducing overspill.
- Aerodynamic design for reduced windage.
- 60mm side or post top entry.
- 3 Pin Nema socket with blanking plug as standard.

Technical Specification

	30W	50W	70W	100W	150W	
Length (mm)	SE 523 / PTE 409	SE 523 / PTE 409	SE 629 / PTE 515	SE 629 / PTE 525	SE 724 / PTE 603	SE Side Entry
Width (mm)	SE 146 / PTE 346	SE 346 / PTE 146	SE 174 / PTE 174	SE 174 / PTE 174	SE 194 / PTE 194	SE Post Top Entry
Height (mm)	SE 134 / PTE 248	SE 134 / PTE 248	SE 135 / PTE 249	SE 135 / PTE 249	SE 137 / PTE 251	



Product Code

11702

Reference

Guarantee

7 Years

EAN

5013588117027

Commodity Code

9405423990

Country of Origin

CN

UNSPSC Code

39111608

Technical Specification

Volts (V)	220/240
Watts (W)	75
Colour Temp (K)	4000
Dimmable?	No
Lumens (lm)	11250
Life Hours	50000
CRI (ra)	85
Switching Cycles	80000
Frequency (Hz)	50/60
LED Drive Current	107mA
Energy Consumption (kWh/1000h)	75
IP Rating	IP66
Impact Protection	IK8

Dimensions

Height (mm)	135
Width (mm)	174
Length (mm)	629

Packaging Information

Single Carton Height (mm)	135
Single Carton Width (mm)	185
Single Carton Depth (mm)	510
Single Carton Weight (kg)	3.3
Individual Volume	0.01274
Outer Box Qty	1

Fittings / LED Floodlights


Skyline Virtus 50/75/100W Wattage Switchable 30° Floodlight - 4000K



Designed and engineered in the UK specifically to meet the requirements for sports lighting and to reduce light pollution levels. The Skyline Virtus is a high specification floodlight, wattage switchable as standard with a 50,000 hour lifespan, 7 year warranty and 2 year on site warranty.

- Wattage Switchable.
- Perfect for sports, building facade's, landscape, security & car park lighting.
- Asymmetric distribution, low light pollution.
- Aerodynamic, streamlined design for reduced windage.
- Air pressure equalisation feature to eliminate capillary effect.
- Nichia GRT-V1 LED.
- Surge protected 10,000V.
- Fully encapsulated IP54 TUV certified driver.
- Supplied pre-flexed (1.5M).
- Robust construction, supplied with standard universal mounting bracket.

Technical Specification



	50/75/100W	100/150/200W	100/225/300W
A	353mm	447mm	495mm
B	287mm	359mm	404mm
C	65mm	75mm	75mm

Product Code 11482

Reference

Guarantee	7 Years
EAN	5013588114828
Commodity Code	9405423990
Country of Origin	CN
UNSPSC Code	39111626

Technical Specification

Volts (V)	110/240
Watts (W)	50/75/100
Colour Temp (K)	4000
Dimmable?	No
Lumens (lm)	7400-15950
Life Hours	50000
Beam Angle	30°
CRI (ra)	80
Switching Cycles	100000
Frequency (Hz)	50/60
Energy Consumption (kWh/1000h)	130
IP Rating	IP66
Impact Protection	IK8

Dimensions

Height (mm)	353
Width (mm)	287
Depth (mm)	65

Packaging Information

Single Carton Height (mm)	375
Single Carton Width (mm)	320
Single Carton Depth (mm)	90
Single Carton Weight (kg)	3.2
Individual Volume	0.0108