
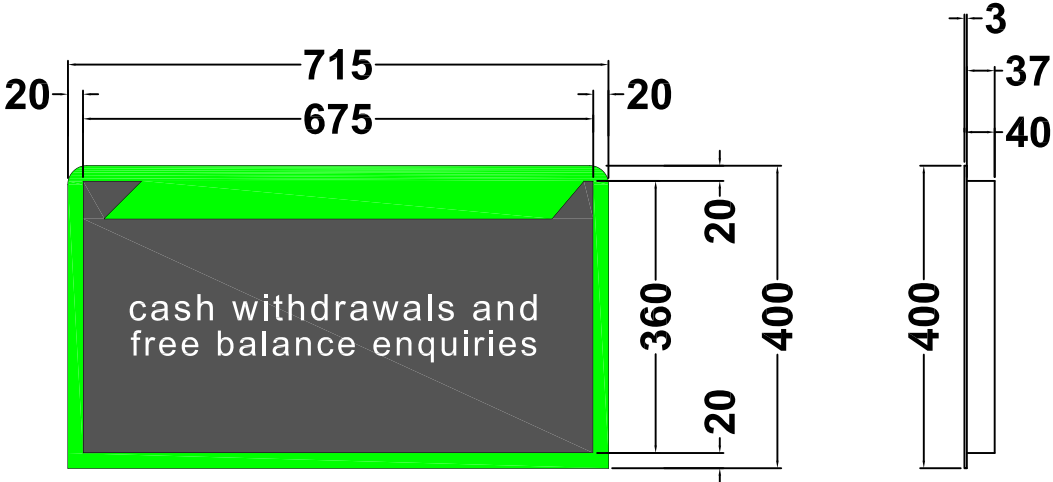


TECHNICAL INFORMATION:

- CONSTRUCTED USING GRP MANUFACTURING PROCESS. DURALITE IS USED FOR THE SURROUND, AND INSET LOGO/LETTERING.

METHOD OF ILLUMINATION:

- LED - ROWS OF LED LIGHTS BEHIND THE TEXT AND TO THE EDGE OF THE BLACK RAISED AREA
- WHITE LETTERING IS TRANSLUCENT
- STATIC ILLUMINATION
- INTERNAL ILLUMINATION
- APPROX. >60 lux @ 1.0 METRE AND WITH AMBIENT LIGHTING >80 lux
- BLACK AND GREEN - PMS 369



PLANNING ATM SIGNS	6625 ADV PTU ILLUMINATED UNIVERSAL TOP SIGN			03				drawing approval	
				02					
	DRAWN	DATE	SCALE	01				NAME:-	
	NG & MK	01/12/2022	1:10 @ A3					POSITION:-	APPROVED:-
	REF/DRG No.	SHEET	REVISION					DATE:-	SIGNED:-
	NCRA0029	SHEET 1							