



LEGEND

- DRAINAGE EASEMENT
- EXISTING TREES/HEDGES With Root Protection Area To be retained
- EXISTING TREES/HEDGES To be removed
- PROPOSED TREES Ets - Extra Heavy Standard Sm - Semi mature Mx - Multi-stem
- PROPOSED CONIFERS Sm - Semi mature
- SPECIMEN PLANTING See Schedule
- ORNAMENTAL HEDGE See Schedule
- PROPOSED PLANTING See Schedule
- TURF with area (m²)
- AMENITY GRASS AREAS White Turf/Turfgrass Mature Emergent E22 sown at 25g/m² Root means short to 40mm
- WILDFLOWER MEADOW Special General Purpose Meadow Mixture Emergent E22 sown at 4 g/m² (seeds guaranteed to be retained and managed. Where retention is required see as above)
- NATIVE WOODLAND MIX See Schedule
- WOODLAND EDGE MIX See Schedule
- FURNITURE As Supplied by Brimley Ltd 48 Ashbourne St Ref: BX 720 Or similar approved

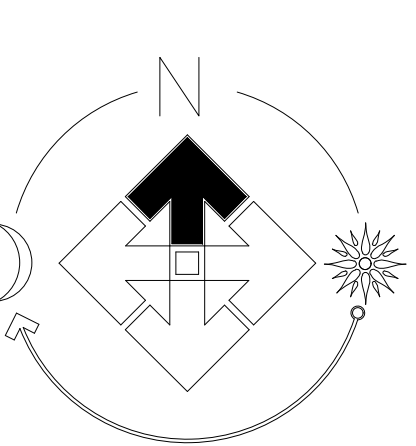

SHEET LAYOUT LOCATION PLAN NOT TO SCALE

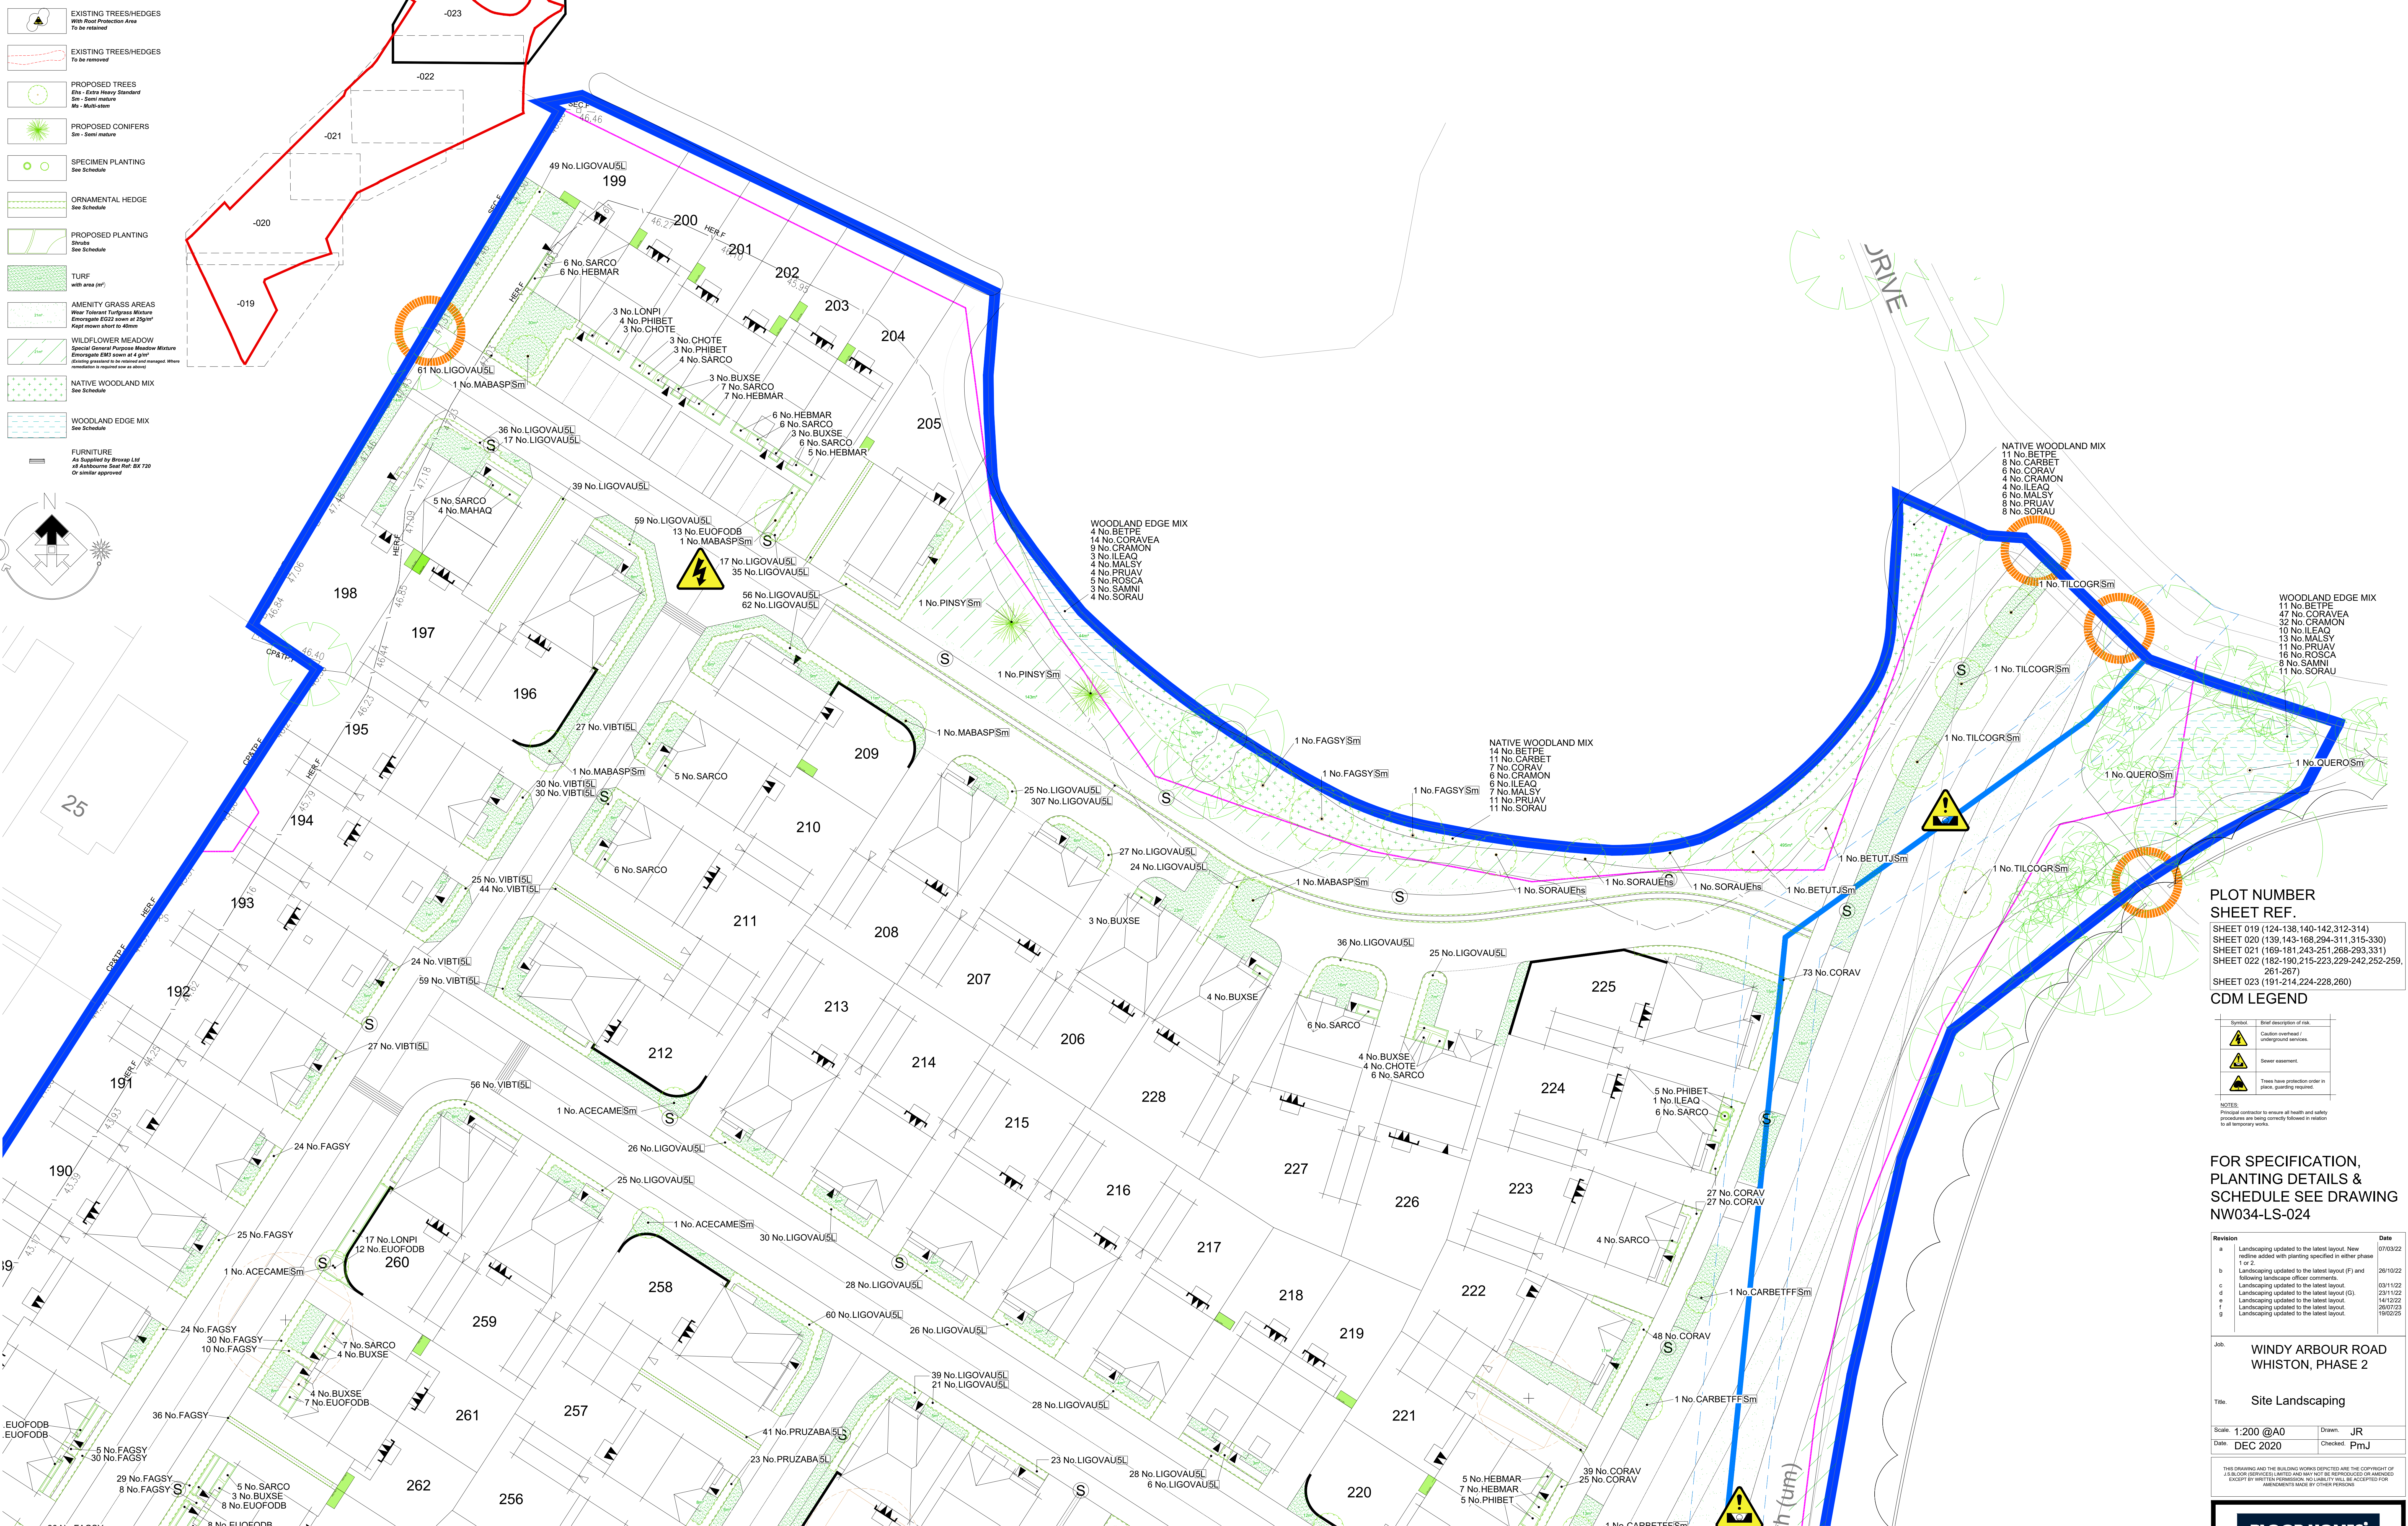

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH SEPARATE GROUP 1 SITE SPECIFIC CONSTRUCTION NOTES AND MATERIALS SPECIFICATION.

PLOT NUMBER SHEET REF.

SHEET 019 (124-138, 140-142, 312-314)
SHEET 020 (139, 143-168, 294-311, 315-330)
SHEET 021 (169-181, 243-251, 268-293, 331)
SHEET 022 (182-190, 215-223, 229-242, 252-259, 261-267)
SHEET 023 (191-214, 224-228, 260)

CDM LEGEND

Symbol	Brief description of risk
	Crane removal/underground services
	Severed easement
	Trees have protection order in place, planting required

NOTES:
Principal contractor to ensure all health and safety procedures are being correctly followed in relation to all temporary works.

FOR SPECIFICATION, PLANTING DETAILS & SCHEDULE SEE DRAWING NW034-LS-024

Revision	Date
a	07/03/22
b	26/10/22
c	03/11/22
d	23/11/22
e	14/12/22
f	26/07/23
g	19/02/25

Job:	WINDY ARBOUR ROAD WHISTON, PHASE 2
Title:	Site Landscaping
Scale:	1:200 @A0
Date:	DEC 2020
Drawn:	JR
Checked:	PmJ

THIS DRAWING AND THE BUILDING WORKS DEPICTED ARE THE COPYRIGHT OF J S BLOOR (SERVICES) LIMITED. NO PART OF THIS DRAWING OR ANY INFORMATION CONTAINED HEREIN IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT PERMISSION IN WRITING FROM BLOOR HOMES. EXCEPT BY WRITTEN PERMISSION, NO LIABILITY WILL BE ACCEPTED FOR ANY DAMAGE OR LOSS OF PROFITS OR OTHER LOSS.



Drawing No: NW034-LS-023g

WINDY ARBOUR ROAD

DRAWING NOTES

All tree and shrub locations and species must be taken into consideration by the project Structural Engineer to ensure that foundation design accords with the specifications set out in Chapter 4 of the NHBC Standards. The landscape Contractor must ensure that plant material is planted in the locations shown and with NO SUBSTITUTIONS made without consulting the Group Landscape Design Department. It is the Landscape Contractor's responsibility to ensure that all underground services have been located and identified in advance of tree pit excavation so that no services are damaged or compromised by tree planting. Any changes to tree positions, species or specifications must be approved by the Group Landscape Design Department. Underground service strips are to be kept free of all plant material. Contractors must comply with all Health and Safety regulations and be aware of project/site specific information including referring to the information set out in the CDM drawings.