


Exterior Specialist 50w LED Forward Through Beam Asymmetric Floodlight



Breather Valve – Balance the internal & External Humidity without compromising the IP Rating +120 adjustment, allows for precise installation

Feature's ;

- **LED CHIPS/DRIVER;** PHILLIPS 3030/ Driver
- **POWER ;** 50W, 100W, 150W, 200W, 300W
- **INPUT VOLTAGE;** AC100-277V 50-60Hz
- **BEAM ANGLE;** 50° X 120° Forward Through Beam Asymmetric
- **WARRANTY;** 50,000 hours / 5 years
- **CERTIFICATION ;** CE, ROHS, IP66, ISO9000, ISO14000

■ Reference ; LS-CL-FLD-50W-FTBA-NW

General Information ;

- Special integrated structure avant-garde design with stable and reliable quality.
- Precision aluminium die casting process , stable structure, good heat dissipation effect from slim light body, with elegant appearance and low wind resistance.
- The surface of the lamp body is hot-dip galvanised and spray treated this makes the Luminaire suitable for any harsh and aggressive site conditions, including salt spray corrosion.
- High- efficiency SMD3030 LED light source and our high quality constant current driver for reliable performance and long life.
- High transmittance PC lens, with a wide array of optical distributions.





Complete with IP68 Connector



Technical Information ;

MODEL	LS-CL-FLD-50W-FTBA-NW
Power	50W
Lumen Output	6860
Beam Angle	50°/120°
Operating Voltage	100-277
Power Factor	>0.95
LED's	SMD3030
Number of LED's	96
Efficiency Lm/W	>137
Colour Temp K	5000
Colour Rendering Index	>70
Protection Level	IP66/IK08
Operating Temp	-30°C to 60°C
Luminaire Size	247*237*47

Certificate; CE, ROHS, ISO9001, ISO14001, ISO45001
ISO50001

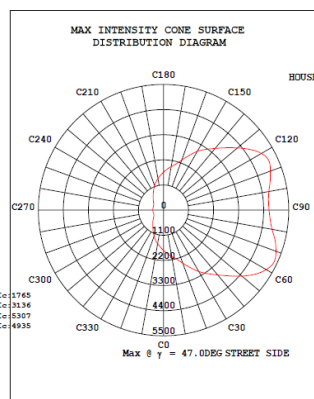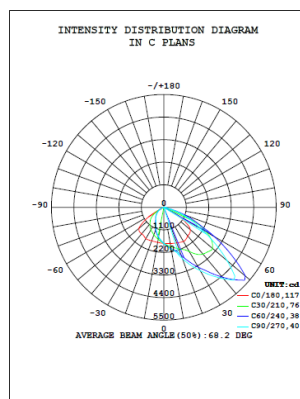

Weight – 1.75KG

ROHS CB CE

