



Arboricultural Constraints Appraisal

in Relation to Proposed Light Industrial Development at



**35 Wilson Road, Huyton Business
Park, Huyton, Merseyside, L36 6AE**

Prepared by:

Bowland 
Tree Consultancy Ltd

March 2022

**ARBORICULTURAL CONSTRAINTS APPRAISAL
35 WILSON ROAD, HUYTON**

CONTENTS

1. TREE SURVEY SCHEDULE & BS5837: 2012 TABLE 1
2. TEMPORARY PROTECTIVE FENCING SPECIFICATION
3. TREE CONSTRAINTS PLAN



Contact Details

Bowland Tree Consultancy Ltd
Unit Two
First Floor
11 Cannon Street
Preston
Lancashire
PR1 3NR

T: 01772 437150
E: info@bowlandtreeconsultancy.co.uk

**ARBORICULTURAL CONSTRAINTS APPRAISAL
35 WILSON ROAD, HUYTON**

PROJECT DETAILS

Project No.: BTC2375

Site: 35 Wilson Road, Huyton Business Park, Huyton, L36 6AE

Client: Linden Hill – Capital Assets – ALX Limited

Council: Knowsley Metropolitan Borough Council

Survey Date: 1 March 2022

Surveyed by: Charles Bennett Dip Arb L6 (ABC) MICFor

Prepared by: Charles Bennett Dip Arb L6 (ABC) MICFor

Checked by: Joseph Lambert BSc(Hons) FdSc MArborA

Date of Issue: 14 March 2022

Version No: 1

DISCLAIMER

Survey Limitations: Unless otherwise stated all trees are surveyed from ground level using non-invasive techniques. The disclosure of hidden crown and stem defects, in particular where they may be above a reachable height or where trees are ivy clad or in areas of ground vegetation, cannot therefore be expected. All obvious defects, however, are reported. Detailed tree safety appraisals are only carried out under specific written instructions. Comments upon evident tree safety relate to the condition of said tree at the time of the survey only.

Unless otherwise stated all trees should be re-inspected annually in order to appraise their on-going mechanical integrity and physiological condition. It should, however, be recognised that tree condition is subject to change, for example due to the effects of disease, decay, high winds, development works, etc. Changes in land use or site conditions (e.g. development that increases access frequency) and the occurrence of severe weather incidents are also significant considerations with regards tree structural integrity and trees should therefore be re-assessed in the context of such changes and/or incidents and inspected at intervals relative to identified and varying site conditions and associated risks.

Where trees are located wholly or partially on neighbouring private third-party land then said land is not accessed and our inspection is therefore restricted to what can reasonably be seen from within the site. Stem diameters of trees located on such land are estimated. Any subsequent comments and judgments made in respect of such trees are based on these restrictions and are our preliminary opinion only. Recommendations for works to neighbouring third-party trees are only made where a potentially unacceptable risk to persons and/or property has been identified during our survey. Where significant structural defects of third-party trees are identified and associated management works are considered essential to negate any risk of harm and/or damage then we will first attempt to inform the site occupier of the issues and, if not possible, then inform the relevant Council. Where a more detailed assessment is considered necessary then appropriate recommendations are set out in the Tree Survey Schedule.

Where tree stem locations are not included on the plan(s) provided then they are plotted at the time of the survey using, where appropriate and/or practicable, a combination of measurement triangulation and GPS co-ordination. Where this is not possible then locations are estimated. Restrictions in these respects are detailed in the report.

The tree survey and any report information provided is intended as a guide to identify key tree related constraints to site development only. As such, the potential influence of trees upon existing or proposed buildings or other structures resulting from the effects of their roots abstracting water from shrinkable load-bearing soils is not considered herein. The tree survey information in its current form should not therefore be considered sufficient to determine appropriate foundation depths for new buildings. Accordingly, an updated survey, with reference to the current NHBC Standards Chapter 4.2 - Building Near Trees, must therefore be prepared for the specific purpose of informing suitable foundation depths subsequent to planning approval being granted. The advice of a structural engineer must also be sought with regard to appropriate foundation depths for new buildings.

Copyright & Non-Disclosure Notice: The content and layout of this report are subject to copyright owned by Bowland Tree Consultancy Ltd, save to the extent that copyright has been legally assigned to us by another party or is used by Bowland Tree Consultancy Ltd under license. This report may not be copied or used without our prior written agreement for any purpose other than those indicated.

Third Parties: Any disclosure of this document to a third party is subject to this disclaimer. The report was prepared by Bowland Tree Consultancy Ltd at the instruction of and for use by our client, as named. This report does not in any way constitute advice to any third party who is able to access it by any means. Bowland Tree Consultancy Ltd excludes to the fullest extent lawfully permitted all liability whatsoever for any loss or damage arising from reliance on the contents of this report.

Statutory Tree Protection: It is the client's responsibility to check for the presence of any statutory tree protection measures, such as the site's location within a Conservation Area and/or the presence of any Tree Preservation Orders, directly with the applicable Council's planning department prior to scheduling or carrying out any tree works. In turn, it is also the client's responsibility to check for the need for a felling licence with the Forestry Commission prior to scheduling or carrying out any tree works. Bowland Tree Consultancy Ltd cannot be held responsible for any decisions made by the client to prune or remove trees where any such statutory protection exists.

TREE SURVEY SCHEDULE FOR ARBORICULTURAL CONSTRAINTS APPRAISAL							
Site:	35 Wilson Road, Huyton Business Park, Huyton, Merseyside, L36 6AE						
Client:	Linden Hill – Capital Assets – ALX Limited						

Surveyor:	Charles Bennett Dip Arb L6 (ABC) MICFor
Survey Date:	1 March 2022
Job Reference:	BTC2375

Page: 1 of 5

No.	Species	Height	Stem Diam.	Branch Spread	Branch & Canopy Clearances	Life Stage	PC	General Observations and Comments	Management Recommendations	ERC	Cat. Grade	RPA (m²)	RPA Radius (m)	
T1	Sycamore	9.5	270	N E S W	3 3 3 3	3-W 3	Y	G	▪ Growing in grass roadside verge with approximately 2m distance to road and footpath. ▪ Crown lifted to clear path and road. ▪ Growing through overhead telephone wires and canopy in close proximity to street light. ▪ Underground services evidently run length of verge.		10+	C2	33	3.24
T2	Sycamore	9	350	N E S W	3 3 3 3	3-W 2.5	SM	G	▪ Growing in grass roadside verge with approximately 2m distance to road and footpath. ▪ Stem bifurcates at 2.5m height and crown lifted to clear path and road. ▪ Underground services evidently run length of verge.		10+	C2	55	4.2
T3	Sycamore	8	240	N E S W	3 3 3 3	3-E 3	SM	G	▪ Growing in grass roadside verge with approximately 3m distance to road and 1m distance to footpath. ▪ Crown lifted to clear path and road. ▪ Underground services evidently run length of verge.		10+	C2	26	2.88
T4	Sycamore	8.5	210	N E S W	3.5 4 4 3	3-E 3	SM	G	▪ Growing in grass roadside verge with approximately 3m distance to road and 1m distance to footpath. ▪ Crown lifted to clear path and road. ▪ Underground services evidently run length of verge.		10+	C2	20	2.52
T5	Sycamore	7	190	N E S W	3 3 3 3	2.5-W 2.5	SM	G	▪ Growing in grass roadside verge with approximately 3m distance to road and 1m distance to footpath. ▪ Crown lifted to clear path and road. ▪ Underground services evidently run length of verge. ▪ Small basal cavity on east side approximately 75mm x 50mm.		10+	C2	16	2.28
T6	Sycamore	7.5	190	N E S W	1 2 2.5 2	3-S 2.5	SM	M	▪ Growing in grass roadside verge with approximately 3m distance to road and 1m distance to footpath. ▪ Crown lifted to clear path and road. ▪ Underground services evidently run length of verge. ▪ Crown sparse, biased to south and impinging on street light. ▪ Deadwood <75mm diameter in crown.		10+	C2	16	2.28

Headings and Abbreviations:

No.	Allocated sequential reference number - Tree ('T'), Group ('G'), Woodland ('W') or Hedge ('H') reference number - refer to plan and to numbered tags where applicable
Species:	Common name
Height:	In metres, to half nearest metre – where possible approximately 80% are measured using an electronic clinometer and the remainder estimated against the measured trees. In the case of Groups and Woodlands the measurement listed is that of the highest tree
Stem Diam.:	Stem diameter in millimetres, to nearest 10mm - measured and calculated as per Annex C of BS5837:2012. MS = multi-stemmed, TS = twin-stemmed
Branch Spread:	Crown radius measured (or estimated where considered appropriate) from the four cardinal points (north, east, south and west) to give an accurate visual representation of the crown
Branch & Canopy Clearances:	Existing height above ground level, in metres, of first significant branch and direction of growth (e.g. 2.5-N) and of canopy at lowest point – to inform on crown to height ratio, potential for shading, etc.
Life Stage:	Estimated age class - Y = young, SM = semi-mature, EM = early-mature, M = mature, PM = post-mature
PC:	Physiological Condition - a measure of the tree(s)' overall vitality, i.e. D = Dead, MD = Moribund, P = Poor, M = Moderate, G = Good
General Observations and Comments:	Comments relating to the tree(s)' overall condition and any other pertinent factors including structural defects, current and potential direct structural damage, physiological decline, poor form, etc.
Management Recommendations:	Either Preliminary or In Consideration of the Proposal - In the case of Arboricultural Constraints Surveys the recommended management works only take existing site and tree circumstances and conditions into account and not proposed developments. Arboricultural Impact Assessment and Method Statement related Surveys take the proposed development into consideration with recommendations made accordingly. More than one option may be given if considered appropriate
ERC:	Estimated Remaining Contribution - in years as per BS5837:2012 (i.e. <10, 10+, 20+, 40+)
Cat. Grade:	Category Grading - tree retention value listed as U, A, B or C - in accordance with BS5837:2012 Table 1
RPA m²:	Root Protection Area in m² - calculated area around the tree that must be appropriately protected throughout the development process in order avoid root damage
RPA Radius (m):	Root Protection Area Radius - in metres measured from the centre of the stem to the line of tree protection
# (Estimated Dimensions):	Where trees are located off-site, or are inaccessible for any other reason, and accurate measurements or other information cannot be taken then the information provided is estimated and is duly suffixed with a “#” symbol

TREE SURVEY SCHEDULE FOR ARBORICULTURAL CONSTRAINTS APPRAISAL							
Site: 35 Wilson Road, Huyton Business Park, Huyton, Merseyside, L36 6AE							
Client: Linden Hill – Capital Assets – ALX Limited							

Surveyor:	Charles Bennett Dip Arb L6 (ABC) MICFor
Survey Date:	1 March 2022
Job Reference:	BTC2375

Page: 2 of 5

No.	Species	Height	Stem Diam.	Branch Spread		Branch & Canopy Clearances	Life Stage	PC	General Observations and Comments	Management Recommendations	ERC	Cat. Grade	RPA (m²)	RPA Radius (m)						
T7	Bastard Service Tree	8	390	N	3	2-S 3	EM	G	▪ Growing in grass roadside verge with approximately 3m distance to road and 1m distance to footpath. ▪ Crown lifted to clear path and road. ▪ Underground services evidently run length of verge. ▪ Tight unions with included bark where multiple branches arise from stem. ▪ Most unions evidently stable at visit except for branch fork on east side at 2m height which is splitting but supported by neighbouring branches. ▪ Canopy pruned on west side to clear streetlight. ▪ Deadwood <75mm diameter in crown.	▪	10+	C2	69	4.68						
T8	Sycamore	5.5	190	N	2				2.5-W 2.5						SM	G	▪ Growing in grass roadside verge with approximately 3m distance to road and 1m distance to footpath. ▪ Crown lifted to clear path and road. ▪ Underground services evidently run length of verge.			
T9	Sycamore	8.5	240	N	2												2-S 3	SM	G	▪ Growing in grass roadside verge with approximately 3m distance to road and 1m distance to footpath. ▪ Crown lifted to clear path and road. ▪ Underground services evidently run length of verge. ▪ Mechanical damage to surface roots from grass cutting machinery with some areas of decay present ≤300mm x100mm. ▪ Large pruning wound 200mm x 75mm at 2m height on south side from which epicormics shoots are growing.
T10	Sycamore	7.5	170	N	3															3-E 3
T11	Sycamore	6	190	N	3	2.5-E 3	SM	M		▪ Growing in grass roadside verge with approximately 3m distance to road and 1m distance to footpath. ▪ Crown lifted to clear path and road. ▪ Underground services evidently run length of verge. ▪ Upper crown sparse and starting to dieback.										
T12	Sycamore	8	210	N	3				3-W 3	SM	G	▪ Growing in grass roadside verge with approximately 3m distance to road and 1m distance to footpath. ▪ Crown lifted to clear path and road. ▪ Underground services evidently run length of verge. ▪ Canopy starting to impinge on street light to north.								

TREE SURVEY SCHEDULE FOR ARBORICULTURAL CONSTRAINTS APPRAISAL							
Site: 35 Wilson Road, Huyton Business Park, Huyton, Merseyside, L36 6AE							
Client: Linden Hill – Capital Assets – ALX Limited							

Surveyor:	Charles Bennett Dip Arb L6 (ABC) MICFor
Survey Date:	1 March 2022
Job Reference:	BTC2375

Page: 3 of 5

No.	Species	Height	Stem Diam.	Branch Spread	Branch & Canopy Clearances	Life Stage	PC	General Observations and Comments	Management Recommendations	ERC	Cat. Grade	RPA (m²)	RPA Radius (m)
T13	Sycamore	7.5	230	N 3 E 3 S 3 W 3	2.5-N 3.5	SM	G	▪ Growing in grass roadside verge with approximately 3m distance to road and 1m distance to footpath. ▪ Crown lifted to clear path and road. ▪ Underground services evidently run length of verge. ▪ Forks into three stems at 2.5m height. ▪ Crown sparse.	▪	10+	C2	24	2.76
T14	Sycamore	7.5	260	N 3 E 3.5 S 3 W 3	2-N 3	SM	G	▪ Growing in grass roadside verge with approximately 3m distance to road and 1m distance to footpath. ▪ Crown lifted to clear path and road. ▪ Underground services evidently run length of verge. ▪ Mechanical damage to surface roots on west side from grass cutting machinery with discreet area of decay 200mm x 100mm. ▪ Wound 150mm x75mm at base of branch on west side at 3m height.	▪	10+	C2	31	3.12
T15	Sycamore	7	240	N 2 E 3 S 3 W 3	3 N 3.5	SM	G	▪ Growing in grass roadside verge with approximately 3m distance to road and 1m distance to footpath. ▪ Crown lifted to clear path and road. ▪ Underground services evidently run length of verge. ▪ Surface root damage on north side ≤200mm x 50mm.	▪	10+	C2	26	2.88
T16	Whitebeam	N/A	260	N N/A E N/A S N/A W N/A	N/A N/A	SM	D	▪ Windblown tree lying on ground.	▪	<10	U	31	3.12
T17	Sycamore	6.5	260	N 3 E 3.5 S 3 W 2.5	2.5-E 3	SM	M	▪ Ivy covered and growing in shrub bed, which prevented detailed inspection. ▪ Upper crown dying back and canopy starting to impinge on street light.	▪	10+	C2	31	3.12
T18	Whitebeam	7	420	N 3.5 E 3.5 S 4 W 4	2-N 3	SM	G	▪ Growing in shrub bed which restricted access and prevented detailed inspection of root area and lowest 1m of stem. ▪ Multiple branches arise at 3m height with numerous included bark unions which were evidently stable at time of survey.	▪	10+	C2	80	5.04
T19	Sycamore	9.5	300	N 3 E 3 S 3 W 3	2.5-S 3.5	SM	G	▪ Growing in grass roadside verge with approximately 3m distance to road and 1m distance to footpath. ▪ Crown lifted to clear path and road. ▪ Underground services evidently run length of verge.	▪	10+	C2	41	3.6

TREE SURVEY SCHEDULE FOR ARBORICULTURAL CONSTRAINTS APPRAISAL							
Site: 35 Wilson Road, Huyton Business Park, Huyton, Merseyside, L36 6AE							
Client: Linden Hill – Capital Assets – ALX Limited							

Surveyor:	Charles Bennett Dip Arb L6 (ABC) MICFor
Survey Date:	1 March 2022
Job Reference:	BTC2375

Page: 4 of 5

No.	Species	Height	Stem Diam.	Branch Spread	Branch & Canopy Clearances	Life Stage	PC	General Observations and Comments	Management Recommendations	ERC	Cat. Grade	RPA (m²)	RPA Radius (m)	
T20	Sycamore	9	340	N E S W	3 3 3 3	2.5-W 3	SM	G	▪ Growing in grass roadside verge with approximately 3m distance to road and 1m distance to footpath. ▪ Crown lifted to clear path and road. ▪ Underground services evidently run length of verge. ▪ Canopy starting to impinge on street light.	▪	10+	C2	52	4.08
T21	Whitebeam	8.5	7x110 (ms)	N E S W	2 3 3 3	0-W 0	SM	G	▪ Multi-stem tree arising from basal suckers from root the stock. ▪ Basal unions tight with included bark but were evidently stable at time of site visit.	▪	10+	C2	44	3.73
T22	Goat Willow	3.5	180#	N E S W	2# 2 2 2	0-S 0	Y	G	▪ Stem arising from old coppiced stump. ▪ Growing into fence and projected to displace on future growth.	▪ Remove tree due to projected displacement of fence.	<10	U	15	2.16
T23	Wild Cherry	8	300#	N E S W	4# 4# 4# 4.5	2-W 1	EM	G	▪ Located on neighbouring land and not accessed to inspect in detail. ▪ Stem bifurcates at 1m with tight included bark union, which were evidently stable at time of survey.	▪	10+	C1	41	3.6
T24	Sycamore	5	100#	N E S W	2# 2# 2# 2	1-N 2	Y	G	▪ Located on neighbouring land and not accessed to inspect in detail. ▪ Growing into fence and projected to displace on future growth. ▪ Stem bifurcates at 1m height.	▪	<10	U	5	1.2
T25	Common Oak	8	100#	N E S W	4# 4# 4# 4	2-W 3.5	SM	G	▪ Located on neighbouring land and not accessed to inspect in detail.	▪	10+	C1	5	1.2
T26	Common Oak	8	310#	N E S W	4# 4# 4# 5	1-W 2	SM	G	▪ Located on neighbouring land and not accessed to inspect in detail. ▪ Bifurcates at 2.5m.	▪	10+	C1	43	3.72
T27	Goat Willow	8.5	700#	N E S W	5# 5# 5 1	0-E 3	M	M	▪ Located on neighbouring land and not accessed to inspect in detail. ▪ Growing into fence and projected to displace on future growth. ▪ Lopped on site side for clearance of 3m above ground level	▪	<10	U	222	8.4
T28	Rowan	7	300#	N E S W	4# 4# 4 4	1-W 2	M	M	▪ Located on neighbouring land and not accessed to inspect in detail. ▪ Stem bifurcates at 1m with tight union which were evidently stable at time of survey. ▪ Canopy pruned on site side for clearance of 3m above ground level.	▪	<10	U	41	3.6

TREE SURVEY SCHEDULE FOR ARBORICULTURAL CONSTRAINTS APPRAISAL							
Site: 35 Wilson Road, Huyton Business Park, Huyton, Merseyside, L36 6AE							
Client: Linden Hill – Capital Assets – ALX Limited							

Surveyor:	Charles Bennett Dip Arb L6 (ABC) MICFor
Survey Date:	1 March 2022
Job Reference:	BTC2375

Page: 5 of 5

No.	Species	Height	Stem Diam.	Branch Spread	Branch & Canopy Clearances	Life Stage	PC	General Observations and Comments	Management Recommendations	ERC	Cat. Grade	RPA (m²)	RPA Radius (m)	
T29	Common Oak	6	190#	N E S W	4 4# 4# 4#	2-W 2.5	SM	G	▪ Located on neighbouring land and not accessed to inspect in detail. ▪ Growing into fence and projected to displace on future growth.	▪	<10	U	16	2.28
G1	approx. 70no. Cypress	≤ 12	≤ 300#	N E S W	≤ 4# ≤ 4# ≤ 4# ≤ 4#	4-E ≥ 5	EM	M	▪ Located on neighbouring land and not accessed to inspect in detail. ▪ Closely spaced linear group forming boundary feature with stems located approximately 1m distance apart.	▪	10+	C2	≤ 41	≤ 3.6
G2	Norway Maple, Willow	≤ 5	≤ 80	N E S W	≤ 2 ≤ 2 ≤ 2 ≤ 2	0-S ≥ 0	Y	G	▪ Group of closely spaced growing into fence and projected to displace on future growth.	▪	<10	U	≤ 3	≤ 0.96
G3	8no. Goat Willow	≤ 4	≤ 300	N E S W	≤ 3 ≤ 3 ≤ 3 ≤ 3	0-S ≥ 0	Y	M	▪ Closely spaced multi-stem Goat Willows with saplings below. ▪ Growing into fence and projected to displace on future growth.	▪	<10	U	≤ 41	≤ 3.6
G4	Cypress and Willow	≤ 16	≤ 600#	N E S W	≤ 8# ≤ 8# ≤ 8# ≤ 8#	2-W ≥ 1	M	G	▪ Located on neighbouring land and not accessed to inspect in detail. ▪ Group of closely spaced Cypress and Willow, approximately eight trees in total.	▪	10+	C2	≤ 163	≤ 7.2
G5	12no. Birch, 3no. Willow, 1no. Cherry	≤ 12	≤ 600#	N E S W	≤ 6# ≤ 6# ≤ 6# ≤ 6#	2-N ≥ 1	EM	G	▪ Located on neighbouring land and not accessed to inspect in detail. ▪ Closely spaced group close to fence. ▪ Understory of small trees and shrubs.	▪	10+	C2	≤ 163	≤ 7.2

BS5837:2012 Table 1 – Cascade Chart for Tree Quality Assessment

Category and definition	Criteria (including subcategories where appropriate)			Identification on plan
Trees unsuitable for retention (see Note)				
Category U Those in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years	- Trees that have a serious, irremediable, structural defect, such that their early loss is expected due to collapse, including those that will become unviable after removal of other category U trees (e.g. where, for whatever reason, the loss of companion shelter cannot be mitigated by pruning) - Trees that are dead or are showing signs of significant, immediate, and irreversible overall decline - Trees infected with pathogens of significance to the health and/or safety of other trees nearby, or very low quality trees suppressing adjacent trees of better quality <i>Note: Category U trees can have existing or potential conservation value which it might be desirable to preserve; see BS5837:2012 paragraph 4.5.7.</i>			Red
	1. Mainly arboricultural qualities	2. Mainly landscape qualities	3. Mainly cultural values, including conservation	
Trees to be considered for retention				
Category A Trees of high quality with an estimated remaining life expectancy of at least 40 years	Trees that are particularly good examples of their species, especially if rare or unusual; or those that are essential components of groups or formal or semi-formal arboricultural features (e.g. the dominant and/or principal trees within an avenue)	Trees, groups or woodlands of particular visual importance as arboricultural and/or landscape features	Trees, groups or woodlands of significant conservation, historical, commemorative or other value (e.g. veteran trees or wood-pasture)	Green
Category B Those of moderate quality and value: those in such a condition as to make a significant contribution. A minimum of 20 years is suggested.	Trees that might be included in the high category, but are downgraded because of impaired condition. Examples include the presence of remediable defects including unsympathetic past management and minor storm damage	Trees present in numbers, usually as groups or woodlands, so they form distinct landscape features which attract a higher collective rating than they might as individuals. But which are not, individually, essential components of formal or semi-formal arboricultural features. For example, trees of moderate quality within an avenue that includes better, A category specimens. Or trees which are internal to the site, therefore individually having little visual impact on the wider locality	Trees with clearly identifiable conservation or other cultural benefits	Blue
Category C Those trees of low quality and value: currently in adequate condition to remain until new planting could be established - a minimum of 10 years is suggested - or young trees with a stem diameter below 150 mm	Trees not qualifying in higher categories	Trees present in groups or woodlands, but without this conferring on them significantly greater landscape value, and/or trees offering low or only temporary screening benefit	Trees with very limited conservation or other cultural benefits	Grey
	Note – Whilst C category trees will usually not be retained where they would impose a significant constraint on development, young trees with a stem diameter of less than 150mm should be considered for relocation			

- TEMPORARY PROTECTIVE FENCING & GROUND PROTECTION SPECIFICATION -

Construction Exclusion Zones (CEZs), shall be enclosed by **Temporary Protective Fencing** and/or, where necessary, **Temporary Ground Protection Measures**. The fencing/ground protection Type(s), locations, and extents shall be agreed, in writing, with the Local Planning Authority (LPA). In turn, the **Temporary Protective Fencing** and/or **Temporary Ground Protection Measures** shall:

1. be constructed as in accordance with the Type 1, Type 2 or Type 3 'Temporary Protective Fencing Construction' sections and, where applicable the 'Temporary Ground Protection Measures' section, as detailed herein and agreed, in advance with the LPA;
2. be retained in place throughout the development process until completion of the project, and only removed following receipt of written permission from the LPA;
3. be sited in the area(s) defined by the Root Protection Areas on the associated Tree Impact Plan, or as the CEZs on the Tree Protection Plan;
4. be erected prior to any construction, demolition or excavation works and remain in place for the duration of the project;
5. preclude any delivery of site accommodation and/or materials and/or plant machinery;
6. preclude all construction related activity, with the sole exception of specified arboricultural works and any other works to be carried out under supervision that have been agreed by all parties;
7. preclude the storage of all development related materials and substances including fuels, oils, additives, cement and/or any other deleterious substance; and
8. be affixed with a 600mm x 300mm warning sign reading "TREE PROTECTION AREA KEEP OUT" (see Figure 1, below), at every 10.0 metre length of protective fencing.
9. Important: Any incursion into CEZs must be by prior arrangement, following consultation with the LPA.

Figure 1: CEZ Warning Sign

**- TREE PROTECTION AREA –
KEEP OUT!**

(TOWN & COUNTRY PLANNING ACT 1990)

**THE TREES ENCLOSED BY THIS FENCE ARE PROTECTED BY PLANNING
CONDITIONS AND/OR SUBJECTS OF A 'TREE PRESERVATION ORDER',
THE CONTRAVENTION OF WHICH MAY LEAD TO CRIMINAL
PROSECUTION**

THE FOLLOWING MUST BE OBSERVED BY ALL PERSONNEL:


- THE PROTECTIVE FENCING MUST NOT BE MOVED
- NO PERSON SHALL ENTER THE CONSTRUCTION EXCLUSION ZONE
- NO MACHINE, PLANT OR VEHICLES SHALL ENTER THE EXCLUSION ZONE
- NO MATERIALS SHALL BE STORED IN THE EXCLUSION ZONE
- NO SPOIL SHALL BE DEPOSITED IN THE EXCLUSION ZONE
- NO EXCAVATION SHALL OCCUR IN THE EXCLUSION ZONE
- NO FIRES SHALL BE LIT IN THE EXCLUSION ZONE

**ANY INCURSION INTO THE EXCLUSION ZONE MUST BE WITH THE
WRITTEN PERMISSION OF THE LOCAL PLANNING AUTHORITY**

Type 1 (i.e. 'Default') Temporary Protective Fencing Construction (see Figure 2, below)

1. Temporary protective fencing panels shall be weldmesh "Heras" panels of at least 2.0 metres in height.
2. The panels shall butt together and be securely fixed to a scaffold framework, as per points 3 to 5 of Figure 2, overleaf.
3. The scaffold framework shall comprise of upright poles of at least 3.0 metres in length driven no less than 0.6 metres into the ground at maximum 3.0 metre centres with horizontal and diagonal poles fixed to the uprights, as per points 4 to 5.
4. The two horizontal rail poles shall be attached to the uprights at heights of 0.6 and 1.8 metres with 3 no. clamps to each joint.
5. The diagonal scaffold pole struts be clamped to the top rail of the scaffold framework at a 45° angle and extend back into the CEZ and clamped to a 0.7 metre length of scaffold tube that shall be driven no less than 0.5m into the ground.
6. No fixing shall be made to any tree and all possible precautions shall be taken to prevent damage to tree roots when locating posts.
7. A 600mm x 300mm warning sign reading "TREE PROTECTION AREA KEEP OUT" (see Figure 1) shall be fixed to every 10.0 metre length of protective fencing.
8. On completion of erection, and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the Consulting Arboriculturist or the LPA Tree Officer, as agreed, shall inspect the Temporary Protective Fencing.


Figure 2: BS5837:2012 Default specification for protective barrier

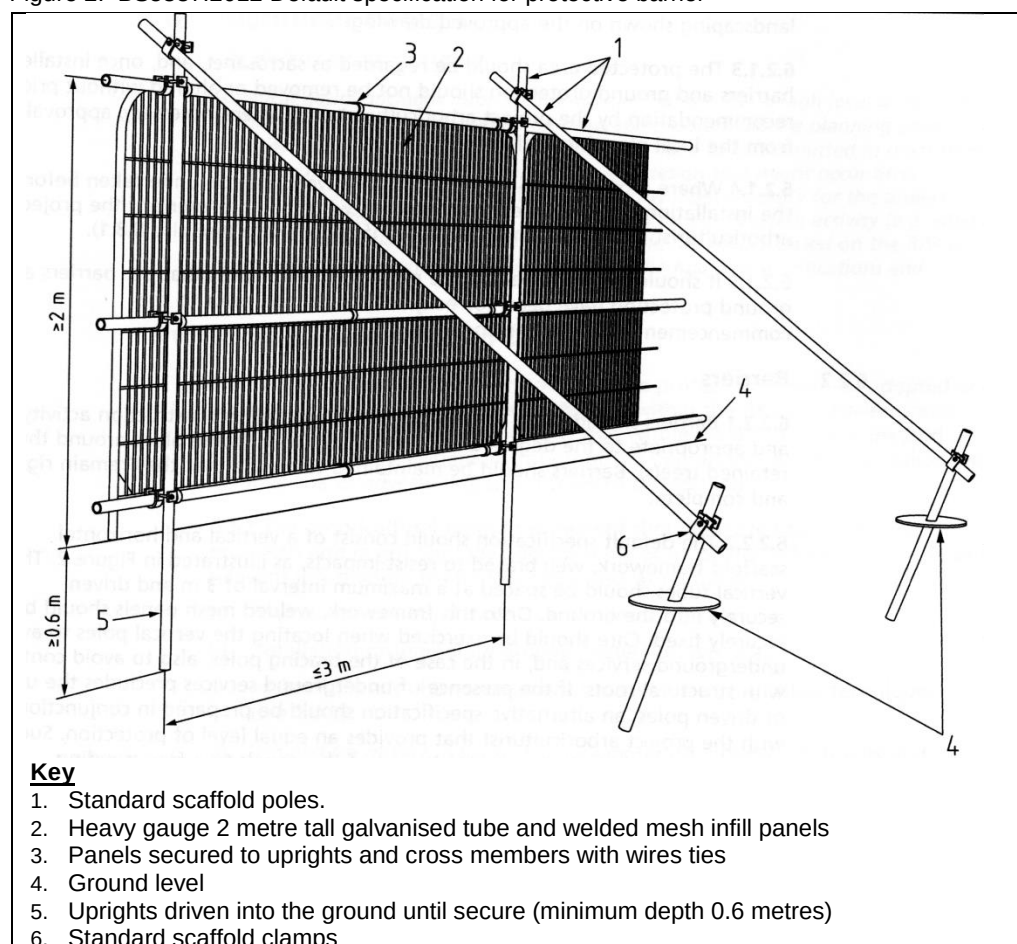

Type 2 Temporary Protective Fencing Construction (see Figure 3(a), below)

1. Temporary protective fencing panels shall be weldmesh "Heras" panels of at least 2.0 metres in height.
2. The panels shall stand on rubber or concrete feet.
3. The panels shall butt together, and be joined together using a minimum of two anti-tamper couplers, installed so that they can only be removed from inside the fence.
4. The distance between the fence couplers shall be at least 1.0 metre, and shall be uniform throughout the fence.
5. The panels shall be supported on the inner side by stabiliser struts, which shall be clamped to the scaffold framework at a 45° angle and extend back into the CEZ and shall be attached to a base plate, which shall be secured to the ground with pins (Figure 3a).
6. No fixing shall be made to any tree and all possible precautions shall be taken to prevent damage to tree roots when locating posts.
7. A 600mm x 300mm warning sign reading "TREE PROTECTION AREA KEEP OUT" (see Figure 1) shall be fixed to every 10.0 metre length of protective fencing.
8. On completion of erection, and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the Consulting Arboriculturist or the LPA Tree Officer, as agreed, shall inspect the Temporary Protective Fencing.


Figure 3(a): Type 2 Fencing (BS5837:2012 above-ground strut stabilising system with ground pins)

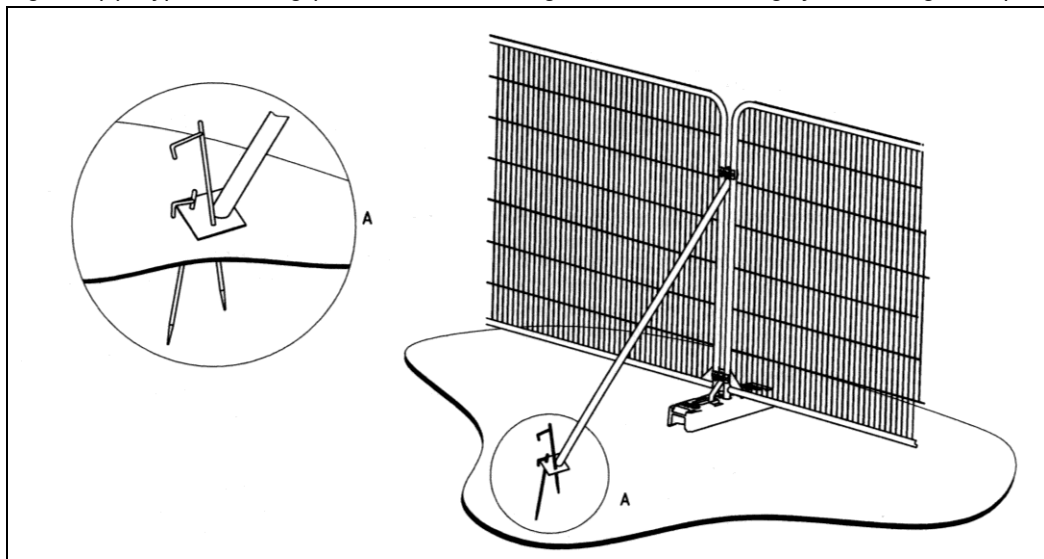

Type 3 Temporary Protective Fencing Construction (see Figure 3(b), overleaf)

1. Temporary protective fencing panels shall be weldmesh "Heras" panels of at least 2.0 metres in height.
2. The panels shall stand on rubber or concrete feet.
3. The panels shall butt together, and be joined together using a minimum of two anti-tamper couplers, installed so that they can only be removed from inside the fence.
4. The distance between the fence couplers shall be at least 1.0 metre, and shall be uniform throughout the fence.
5. The panels shall be supported on the inner side by stabiliser struts, which shall be clamped to the scaffold framework at a 45° angle and extend back into the CEZ and shall be attached to a block tray base (Figure 3b).
6. No fixing shall be made to any tree and all possible precautions shall be taken to prevent damage to tree roots when locating posts.
7. A 600mm x 300mm warning sign reading "TREE PROTECTION AREA KEEP OUT" (see Figure 1) shall be fixed to every 10.0 metre length of protective fencing.
8. On completion of erection, and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the Consulting Arboriculturist or the LPA Tree Officer, as agreed, shall inspect the Temporary Protective Fencing.


Figure 3(b): Type 3 Fencing (BS5837:2012 above-ground stabilising system with strut on block tray)

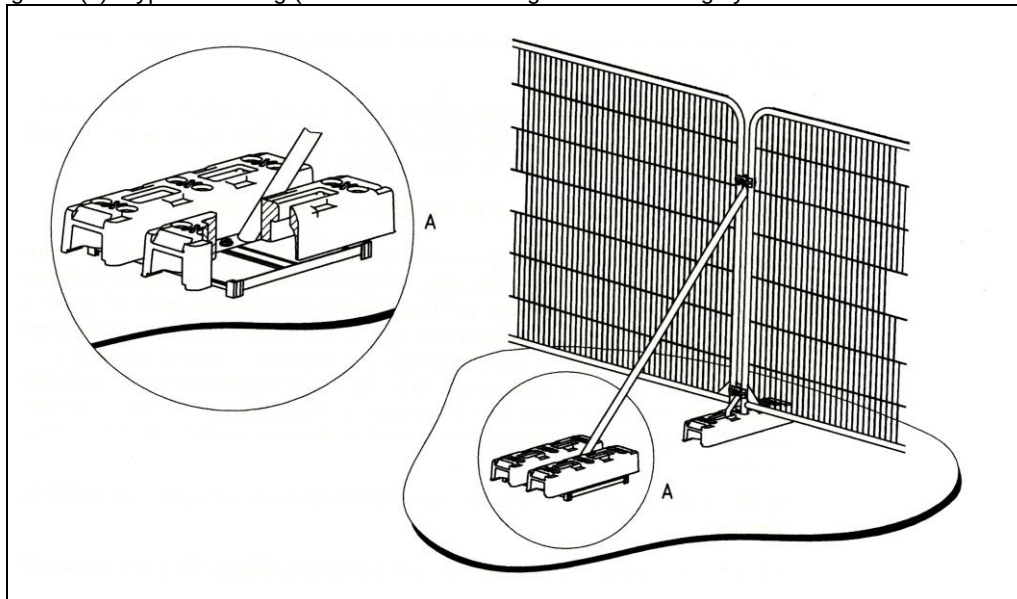


Temporary Ground Protection

1. Any necessary Temporary Ground Protection areas shall conform to Figure 4, below, unless otherwise agreed with the LPA.
2. The Ground Protection Area shall be left undisturbed and covered by a semi-permeable geotextile membrane which shall, in turn, be covered by a compressible layer consisting of a material such as woodchip.
3. Side-butting scaffold boards shall then be fitted to cover the Ground Protection Area.
4. On completion of installation, and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the Consulting Arboriculturist or the LPA Tree Officer, as agreed, shall inspect the Temporary Ground Protection.
5. The Temporary Ground Protection shall remain in place until completion of the project and only removed following receipt of written permission from the LPA.

Figure 4: Temporary Ground Protection – Recommended Construction

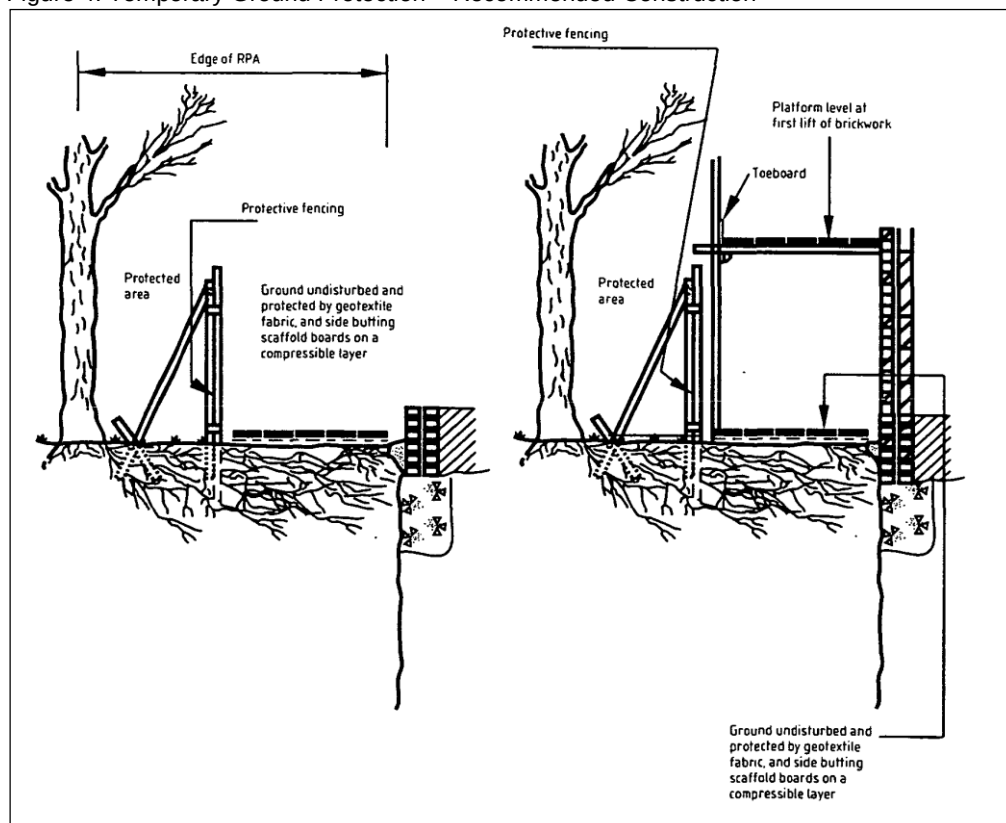



KEY

T = Individual Tree
G = Group of Trees

Please refer to associated Tree Survey Schedule and appendices for specific details in respect of items below:

Tree Categorisations:

- Those to be Considered for Retention:
- Category 'A' Tree/Group**
Those of a High Quality with an Estimated Remaining Life Expectancy of at Least 40 Years
 - Category 'B' Tree/Group**
Those of a Moderate Quality with an Estimated Remaining Life Expectancy of at Least 30 Years
 - Category 'C' Tree/Group**
Those of Low Quality with an Estimated Remaining Life Expectancy of at Least 10 Years, or Young Trees

Those Considered Unsuitable for Retention:

- Category 'U' Tree/Group**
Those in Such a Condition that they Cannot Practically be Retained as Living Trees in the Context of the Current Land Use for Longer Than 10 Years

Note: The stem locations of surveyed trees T22 to T28 and T29, and the stem locations and full extents of groups were not included on the topographical survey plan provided, and their locations, including the extents of groups, were subsequently plotted by the arboricultural surveyor at the time of the survey using GPS siting and, where possible, measurement from existing site features. As such, the plotted locations of these trees and the extents of the groups cannot therefore be considered to be wholly accurate.

Root Protection Areas (RPAs):

RPAs
Areas of Ground Around Trees that Should be Protected Throughout Development Works with Protective Fencing to form a Construction Exclusion Zone - see Appended Temporary Protective Fencing Specification

DISCLAIMER: The original version of this plan was produced in colour. Where it is essential to the plan's interpretation and clarity, as such, a monochrome copy should not be relied upon.

Project:
35 WILSON ROAD
HUYTON BUSINESS PARK
HUYTON
MERSEYSIDE
L36 6AE

Client:
LINDEN HILL - CAPITAL ASSETS -
ALX LIMITED

Title:
TREE CONSTRAINTS PLAN
in Relation to Proposed Light Industrial Development

Scale: 1:500@A0
Date: March 2022
Drawn by: CB
Checked by: JL

Bowland
Tree Consultancy Ltd
info@bowlandtreeconsultancy.co.uk
01707 451000

Ref: BTC2375-TCP Rev: