
PLANT SCHEDULE

TREES							
QTY	UNIT	CODE	PLANT NAME	STOCK	FORM	GIRTH/HEIGHT	SPECIFICATION
33	No.	CAR FAS ss	Carpinus betulus "Fastigiata"	RB	STD	10-12cm	2x; select standard;clear stem minimum 175-200, 300-350cm ht; 4 breaks
HEDGE MIXES							
PERCENT	QTY	UNIT	PLANT NAME	STOCK	SIZE		SPECIFICATION
131m NATIVE HEDGE MIX 26 planted @ 5/m in a Double Staggered Row							
5%	39	No.	Acer campestre	B Trans	60-80cm		1+1; Transplant - seed raised
45%	345	No.	Crataegus monogyna	B Trans	60-80cm		1+1; Transplant - seed raised
4%	30	No.	Corylus avellana	B Trans	60-80cm		1+2; Transplant - seed raised; branched; 3 breaks
10%	76	No.	Prunus padus	B Trans	60-80cm		1+1; Transplant - seed raised; branched; 3 breaks
3%	23	No.	Prunus spinosa	B Trans	60-80cm		1+1; Transplant - seed raised; branched; 2 breaks
3%	23	No.	Rosa canina	B Trans	60-80cm		1+1; Transplant - seed raised; branched; 3 breaks
To be planted in species groups of approximately 9-15.							
Planted in double staggered rows, 400mm between rows, 400mm centres (5no. Per lin.m),							
Pit planted in troughs 300mm x 300mm and 300mm depth. With rabbit protection (minimum 600mm height) and staked.							
PLANT MIXES							
PERCENT	QTY	UNIT	PLANT NAME	STOCK	SIZE		SPECIFICATION
484m2 ORNAMENTAL SHRUB MIX 2 planted @ 3m centres							
16%	27	No.	Cornus stolonifera 'Flaviramea'	C 3L	40-60cm		
16%	27	No.	Cornus sanguinea 'Midwinter Fire'	C 3L	40-60cm		
16%	27	No.	Hedera helix 'Green Ripple'	C 3L	40-60cm		
16%	27	No.	Hydrangea macrophylla 'Lanarth White'	C 3L	40-60cm		
16%	27	No.	Ilex aquifolium	C 3L	40-60cm		
16%	27	No.	Viburnum opulus 'Compactum'	C 3L	40-60cm		
Entire area under planting to be seeded with Reclaimation Grass Seed Mix (non-ryegrass) by British Flora at a density of 30g/m2.							
Pit planted in troughs 300mm x 300mm and 300mm depth. With rabbit protection (minimum 600mm height) and staked.							
1409m2 WOODLAND UNDERSTOREY MIX planted @ 3m centres							
14%	67	No.	Corylus avellana	B Trans	60-80cm		1+2; Branched; 3 breaks
14%	67	No.	Euonymus europaeus	B Trans	60-80cm		1+2; Branched; 5 breaks
14%	67	No.	Ilex aquifolium	C 3L	30-40cm		Leader with laterals
14%	67	No.	Prunus spinosa	B Trans	60-80cm		1+1; Branched; 2 breaks
14%	67	No.	Taxus baccata	C 3L	30-40cm		Leader with laterals
14%	67	No.	Sambuca nigra	B Trans	60-80cm		1+2; Branched; 3 breaks
14%	67	No.	Viburnum opulus	B Trans	60-80cm		1+2; Branched; 3 breaks
Individual varieties to be planted in groups of between 3 and 5.							
Pit planted in troughs 300mm x 300mm and 300mm depth. With rabbit protection (minimum 600mm height) and staked.							
3281m2 REMEDIATION MIX planted @ 3m centres							
10%	110	No.	Sorbus aucuparia	B FTH	125-150cm		2x; Feathered; 3 breaks
10%	110	No.	Betula pendula	B FTH	125-150cm		2x; Feathered; 3 breaks
10%	110	No.	Betula pubescens	B FTH	125-150cm		2x; Feathered; 3 breaks
10%	110	No.	Salix alba	B	150-175cm		0/1/2; Transplant - cutting raised
10%	110	No.	Populus nigra beutifolia	B	175-200cm		2x; Feathered; 3 breaks
10%	110	No.	Alnus glutinosa	B	150-175cm		2x; Feathered; 3 breaks
10%	110	No.	Quercus robur	B	150-175cm		2x; Feathered; 3 breaks
10%	110	No.	Prunus spinosa	B	60-80cm		1+1; Transplant - seed raised;
10%	110	No.	Crataegus monogyna	B	80-100cm		1+2; Transplant - seed raised
10%	110	No.	Salix caprea	B	60-80cm		0/1; Cutting; branched; 2 breaks
Individual varieties to be planted in groups of between 3 and 5 at random ensuring no large groups of one species.							
Entire area under planting to be seeded with Reclaimation Grass Seed Mix (non-ryegrass) by British Flora at a density of 30g/m2.							
Pit planted in troughs 300mm x 300mm and 300mm depth. With rabbit protection (minimum 600mm height) and staked.							
382m2 WOODLAND GROUND FLORA planted @ 5/m2							
10%	191	No.	asplenium scolopendrium	0.5L	Full pot		
10%	191	No.	Geranium robertianum	50cc	Plug; established root 2-3 months min		
10%	191	No.	Brachypodium sylvaticum	50cc	Plug; established root 2-3 months min		
10%	191	No.	Dryopteris dilatata	0.5L	Full pot		
10%	191	No.	Digitalis purpurea	50cc	Plug; established root 2-3 months min		
5%	96	No.	Milium effusum	50cc	Plug; established root 2-3 months min		
5%	96	No.	Hyacinthoides non-scripta	grade 8/9	Bulb		
10%	191	No.	Primula vulgaris	50cc	Plug; established root 2-3 months min		
10%	191	No.	Geum urbanum	50cc	Plug; established root 2-3 months min		
10%	191	No.	Silene dioica	50cc	Plug; established root 2-3 months min		
10%	191	No.	Mercurialis perennis	50cc	Plug; established root 2-3 months min		

NOTES AND ABBREVIATIONS

B = Bare root (bagged).
C = Container (or pot) grown, followed by size of the container (or pot).
FORM = Shape of tree as supplied by the nursery.
RB = Rootballed (balled and wrapped).
SIZE = Height or Spread of juvenile plant.
STOCK = Root condition/protection method eg Bare root.
Trans = Transplant (or undercut seedling).
- Refer to specification for further information.
- All plants to be completely hardened off
- Substitutions to be agreed with Landscape Architect.
Plant Schedule generated by "Qscape" software 04/04/2023

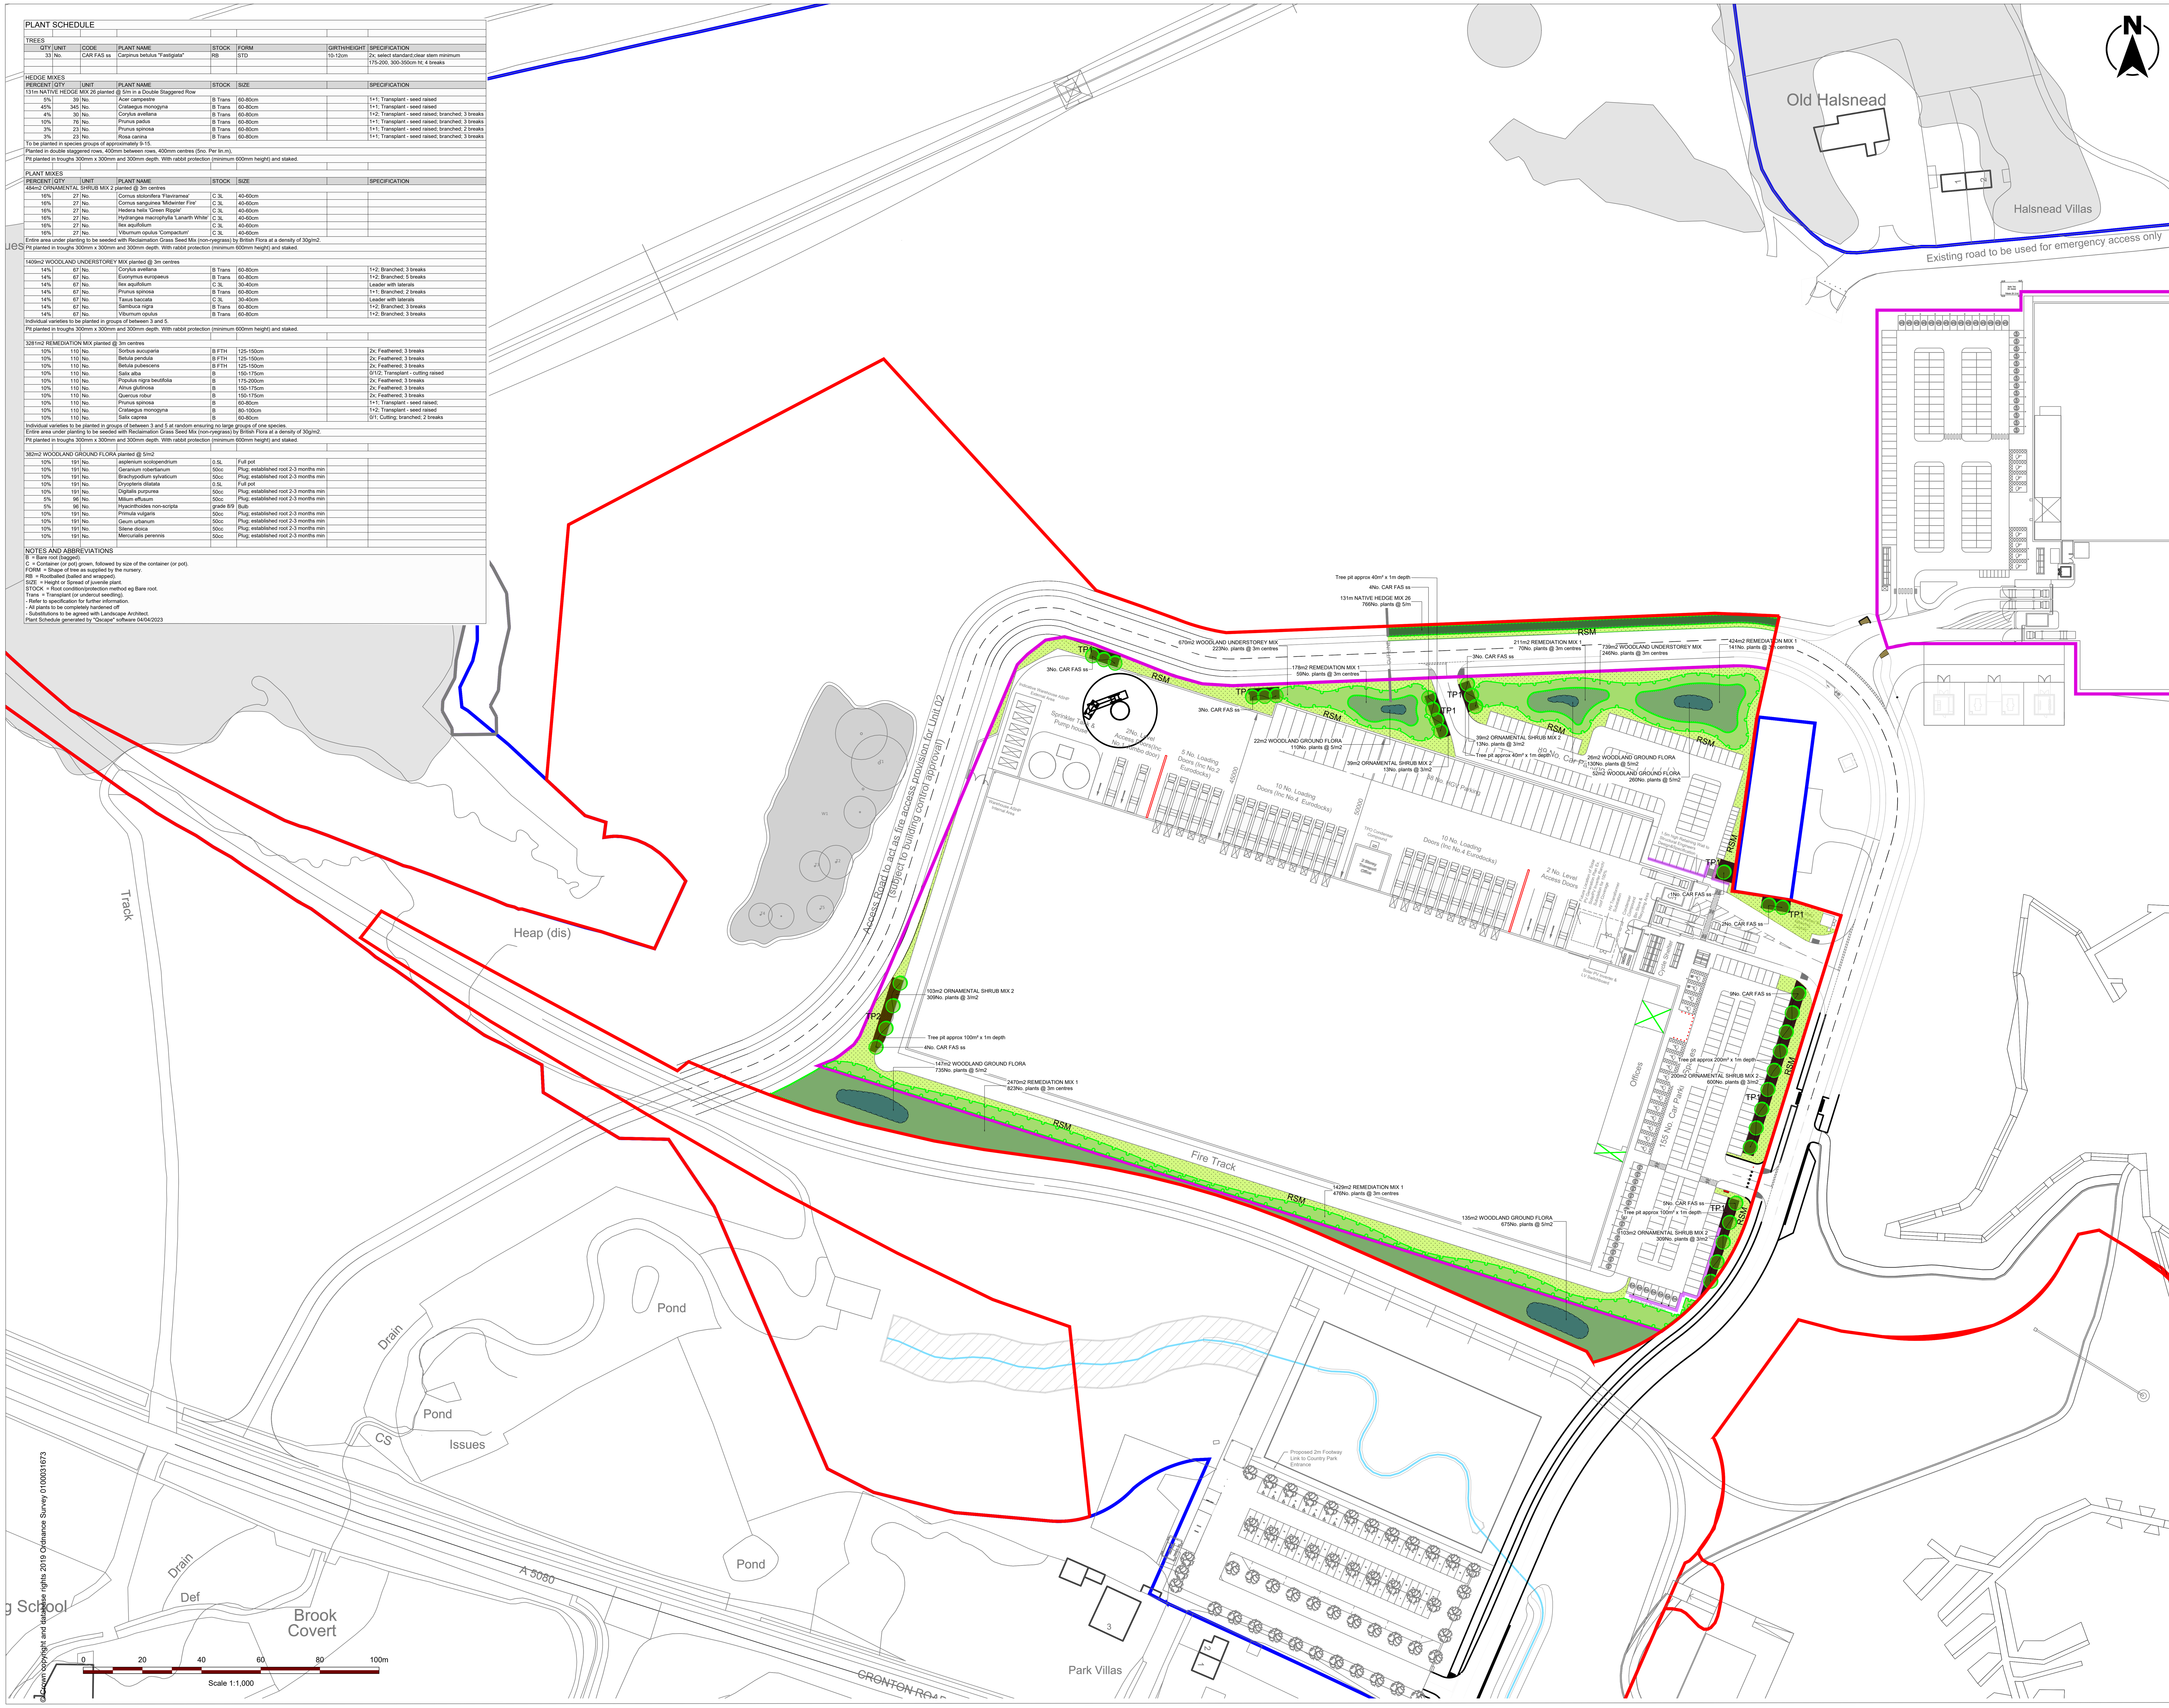

© Crown copyright and database rights 2019 Ordnance Survey 0100031673

NOTES

- Do not scale from this drawing
- All dimensions are in meters unless stated otherwise
- This drawing is to be read in conjunction with all relevant drawings and documents associated with this project.
- All surveyed information including levels and layout is provided by others
- All existing and proposed dimensions, levels and locations to be checked and verified by the main contractor on site prior to the commencement of the works and any anomalies reported to the engineer.

KEY

Site Boundary

Soft Works

Indicative Existing Vegetation

Proposed Individual Trees

Proposed Hedges

Tree and shrub planting Woodland understory mix

Tree and shrub planting Remediation mix 1

Plug Planting Woodland Ground Flora

RSM — Wildflower / Grassland Mix Reclaimation Grass Seed Mix (non-ryegrass) by British Flora at a density of 30g/m2

TP1 — Tree Pit Type 1. Imported top soil for tree pits at 1m depth, see plan for m² area required. All tree pits to be planted with Ornamental Shrub Mix 2, see planting specification list for details, in addition to tree planting as specified on plan.

TP2 — Tree Pit Type 2. Imported top soil for tree pits at 1m depth, see plan for m² area required. All tree pits to be planted with Reclaimation Grass Seed Mix (non-ryegrass) by British Flora at a density of 30g/m2, in addition to tree planting as specified on plan.

Rev	Date	Description	DRA	CHK	APP
PL03	19/07/23	For Planning	JH	CG	CG
PL02	13/07/23	For Planning	JH	CG	CG
PL01	03/04/23	For Planning	JH	CG	CG

Project
Former Cronton Colliery

Client
Tritax Symmetry Merseyside 1 Ltd.

Drawing Title
Planting Masterplan

DRAFT

Status	Date	Scale
For Planning	03/04/23	1:1000@A1

Drawn	Designed	Checked	Approved
JH	JH	CG	CG

DWG No. MAN.1453.007.ENZ.XX.00.DR.L.45.001 **Revision** PL03

enzygo environmental consultants
BRISTOL 01454 269 237 www.enzygo.com
MANCHESTER 0161 413 6444
SHEFFIELD 0114 321 5151 hello@enzygo.com