


1. The gravestone will be washed down with a bristle brush and water to remove water soluble dirt and loose deposits. The brush will be dipped in a bucket of clean warm water and scrubbed across the surface of the stone. A dry, clean sponge used to soak up any excess with the cleaning water changed regularly.
2. Following brush cleaning the stone will be subject to steam cleaning using a DOFF type system. A small sample test patch will be undertaken on the rear of the stone to test the system noting the intended outcome is to remove dirt and biological deposits.

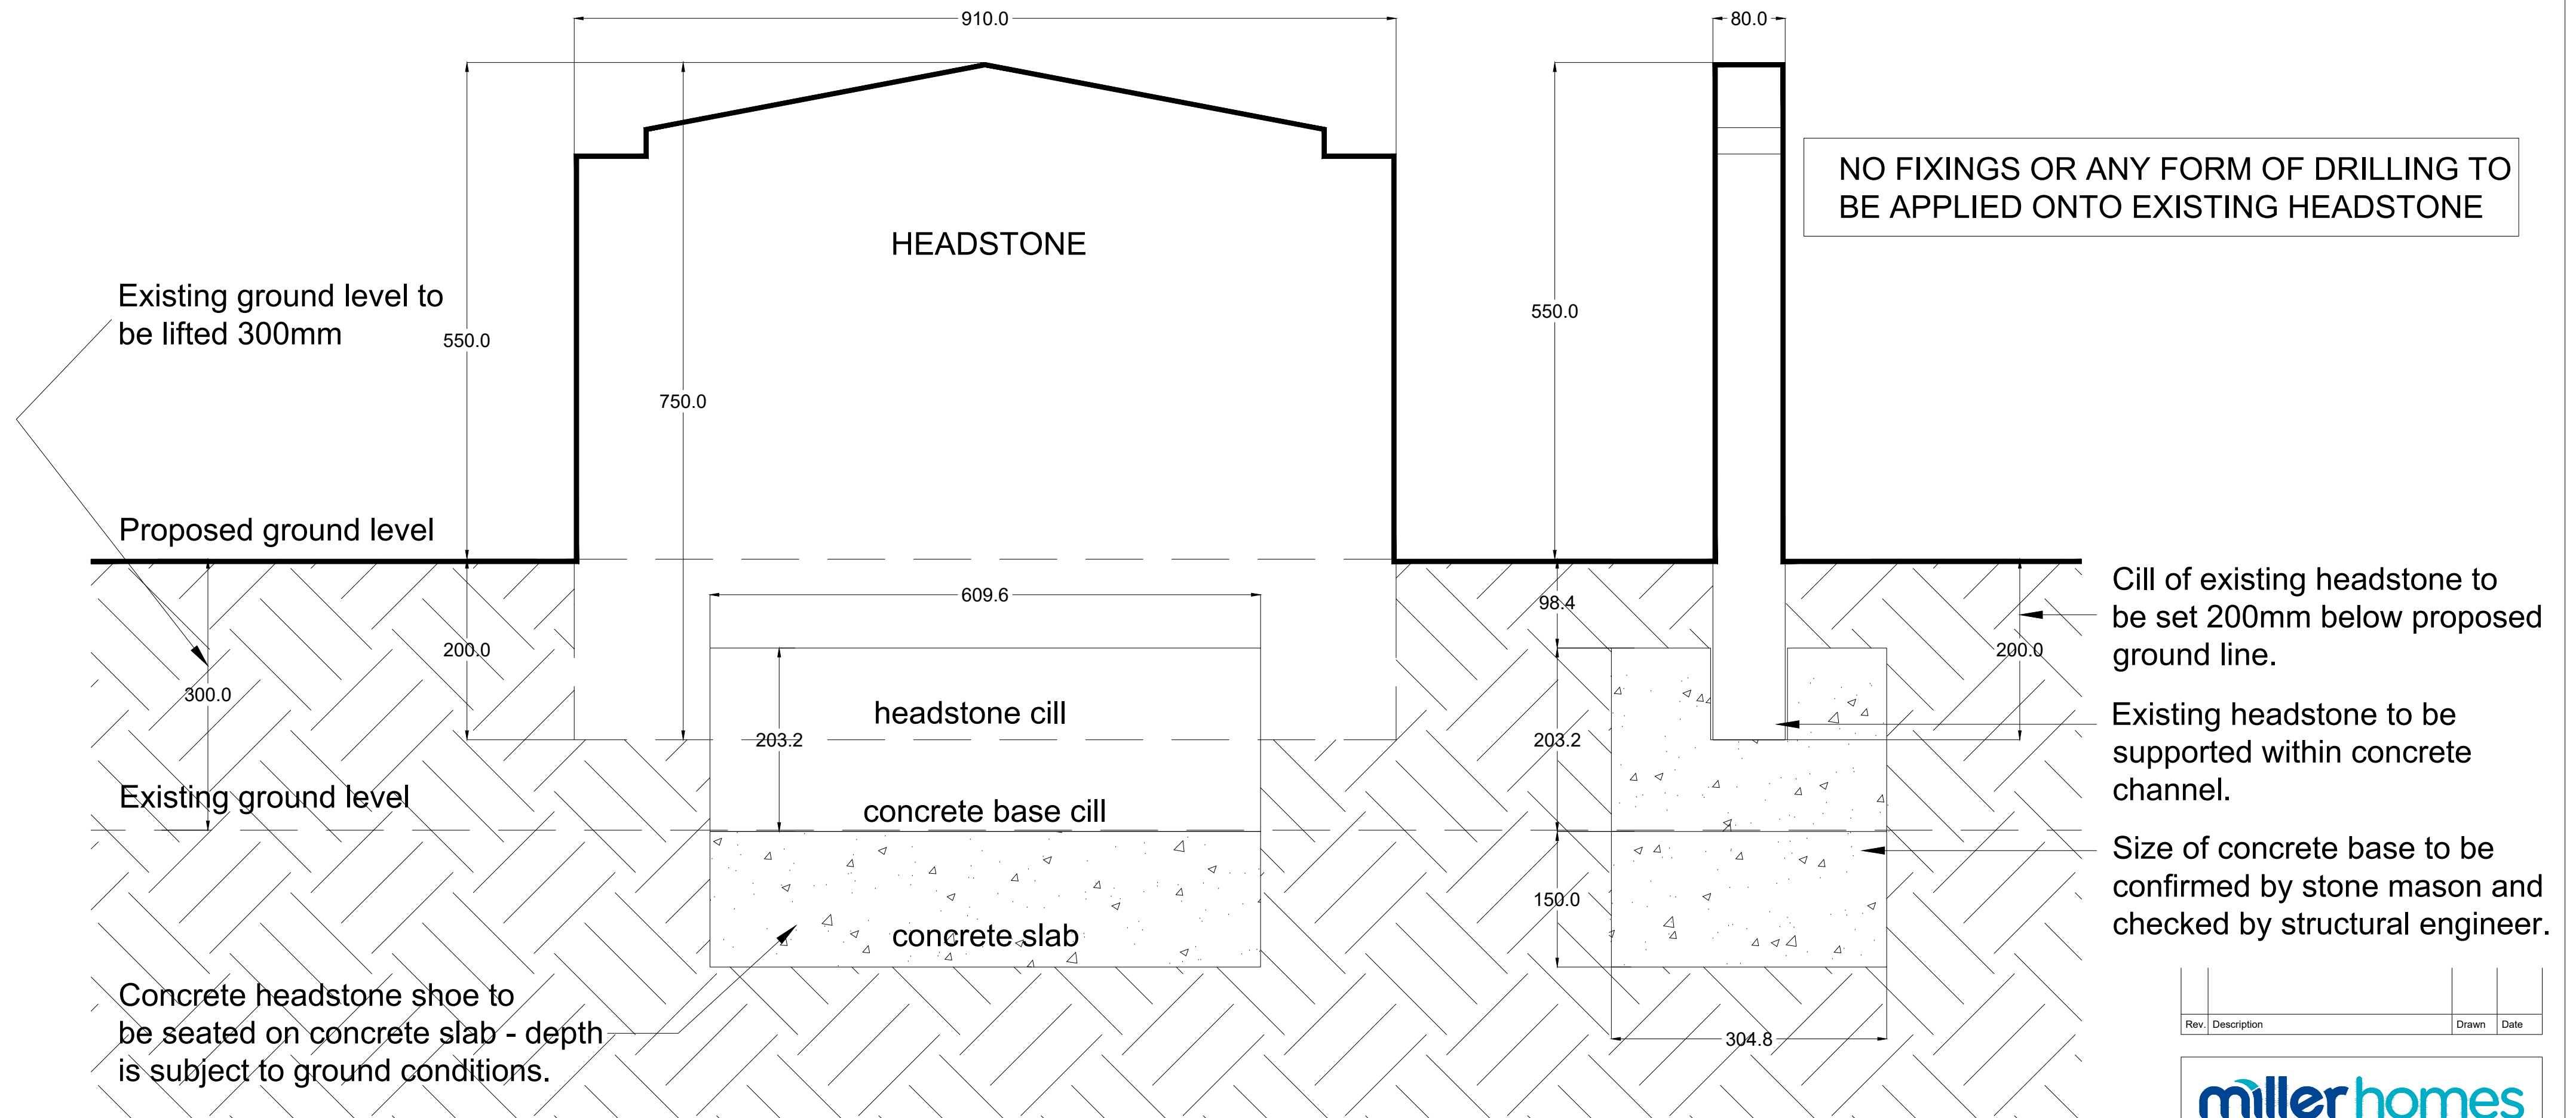

Project Title

Wilbury Park, Halewood

Drawing Title

Blackie's Headstone
Setting Out Plan

Scale	Drawn By	Checked By	Authorised By
1:10	MH	MH	MH
	Date 11.07.22	Date 11.07.22	Date 11.07.22
Job No.	Drawing No.	Revision	
	WP-BH-P-01	#	

Rev.	Description	Drawn	Date