


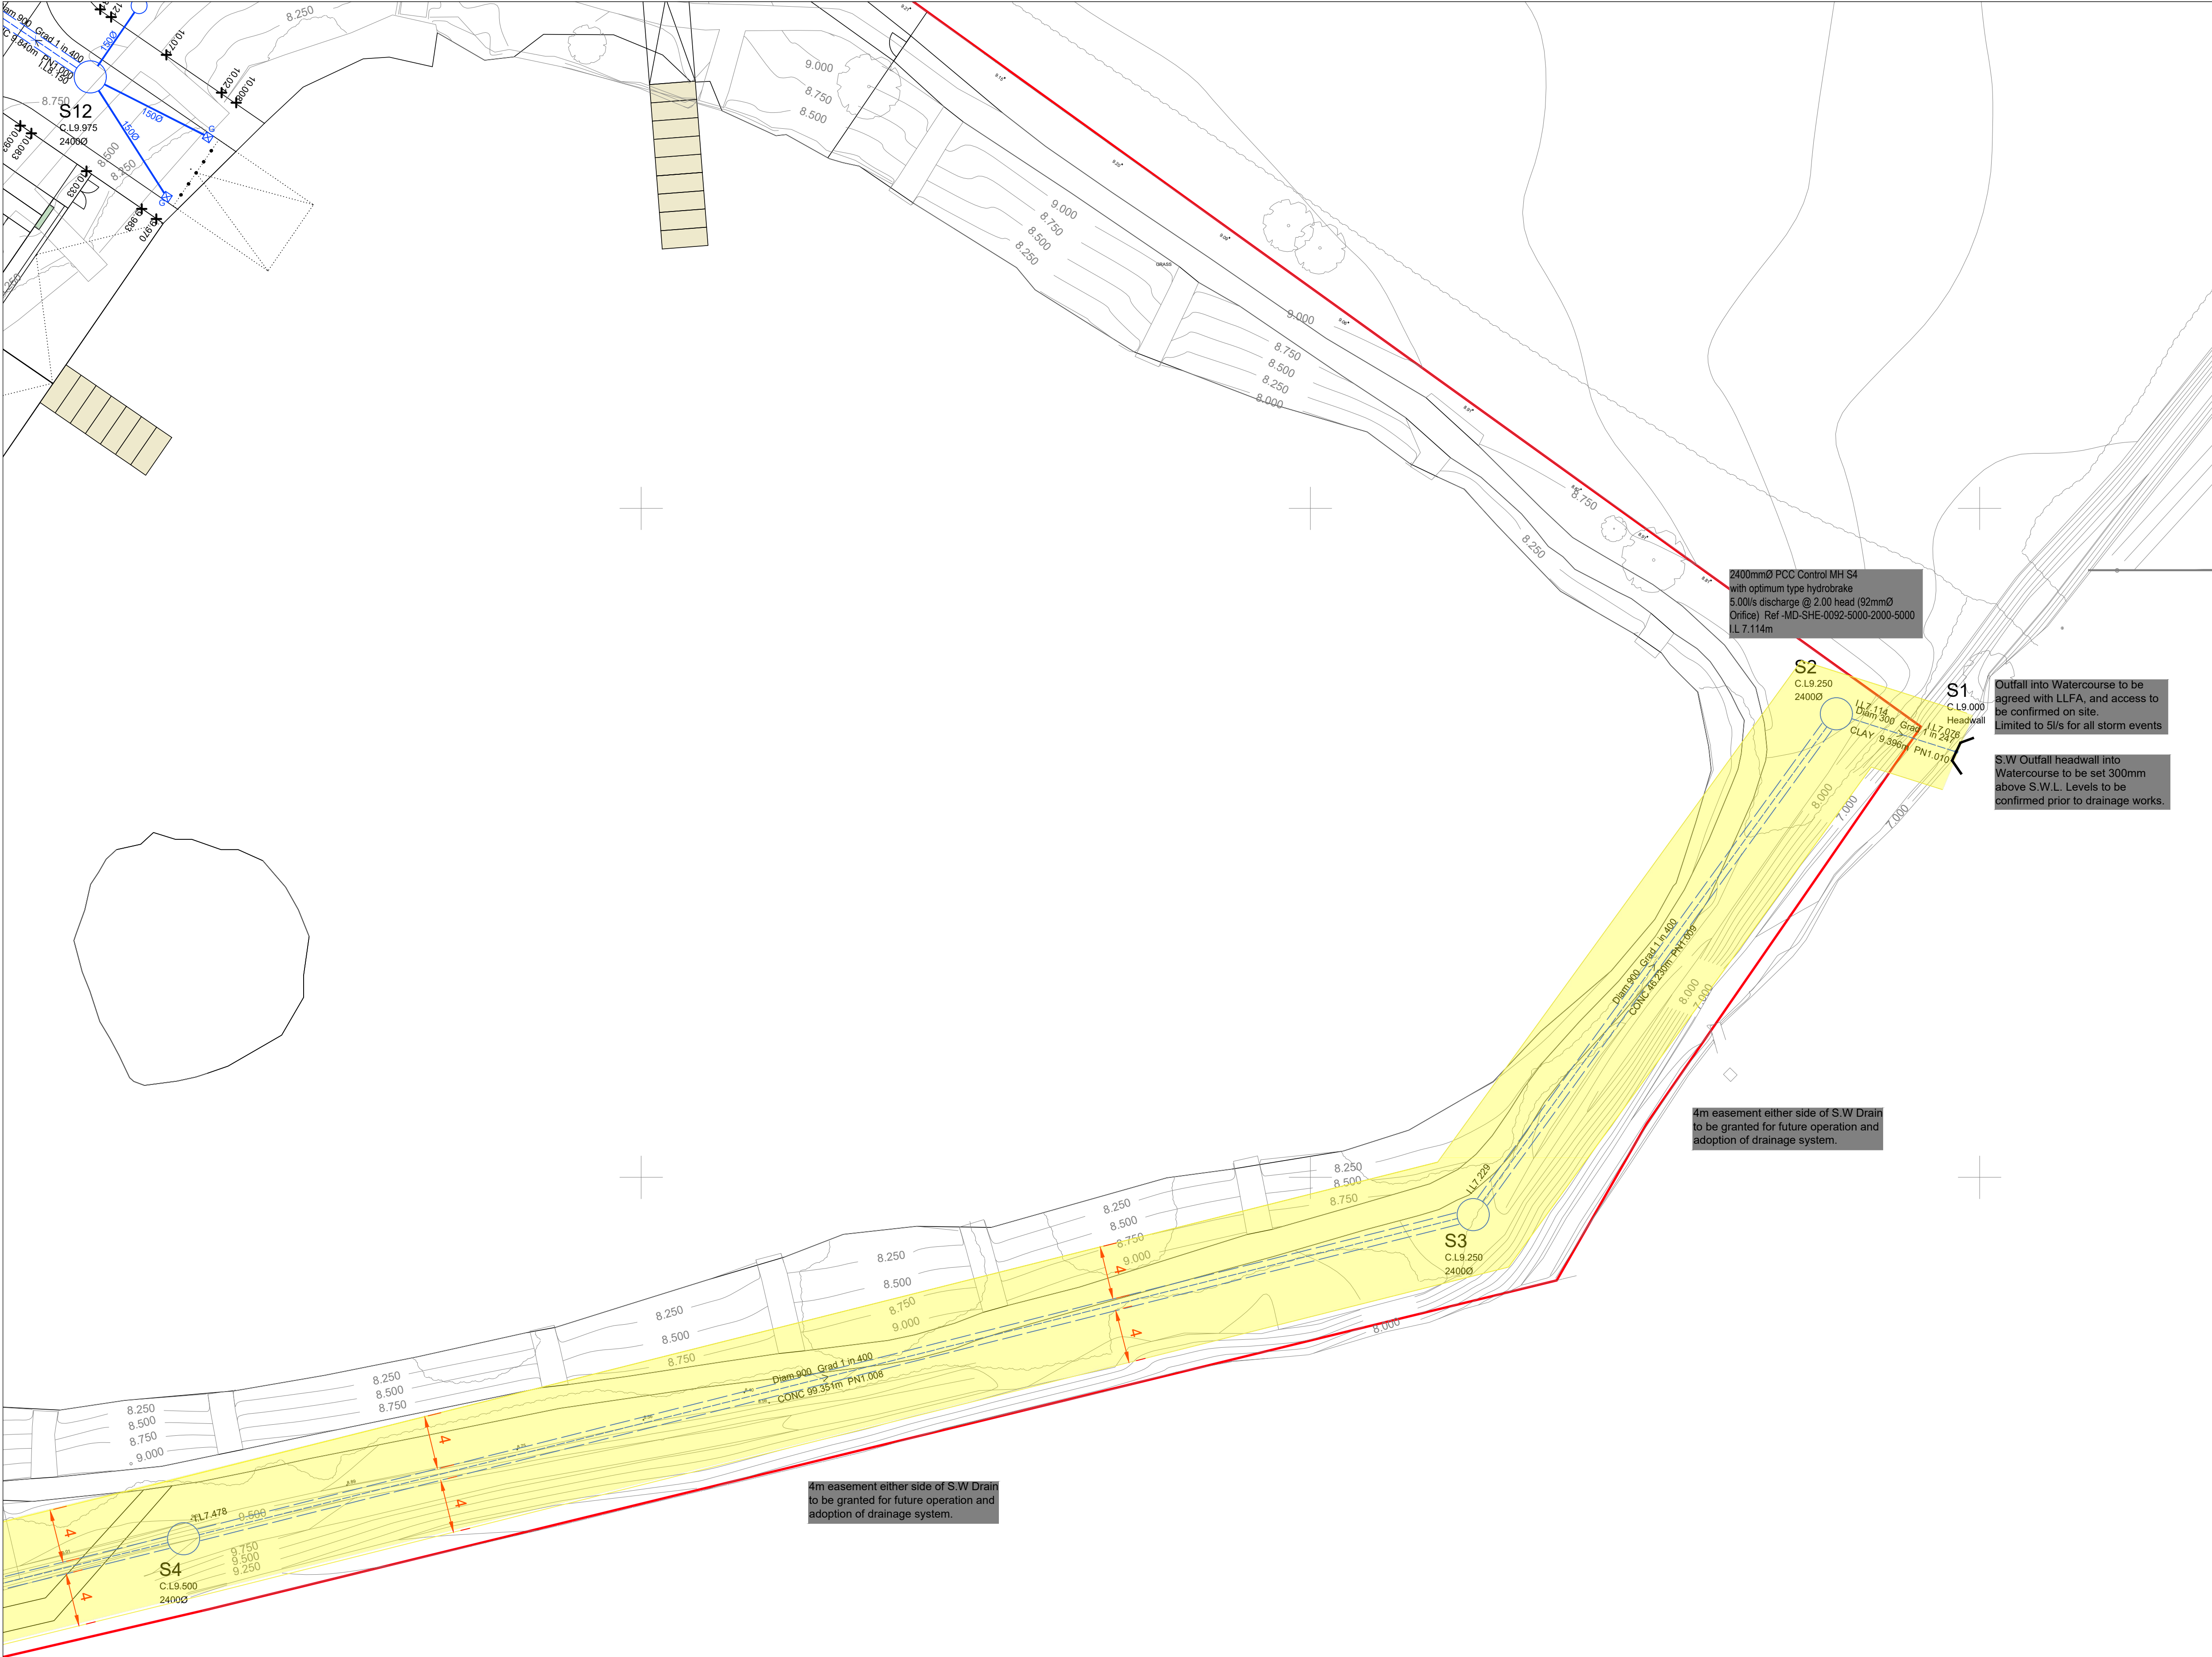


1. ALL ADAPTABLE SEWER WORKS AND MATERIAL TO BE IN ACCORDANCE WITH "CODE FOR ADOPTION". THE RELEVANT BRITISH/EUROPEAN AND YORKSHIRE WATER'S STANDARDS/REQUIREMENTS/ADDENDUM TO THE MECHANICAL AND ELECTRICAL SPECIFICATION AND KITEMARKED
2. MANHOLE COVERS SHALL/MUST HAVE A CLEAR OPENING OF 600mm AND SHALL BE CLASS D400 TO BS EN 124 WITH 150mm DEEP FRAMES IN HIGHWAYS
3. FILLED GROUND MUST BE FILLED AND CONSOLIDATED UNDER THE SUPERVISION AND TO THE SATISFACTION OF YORKSHIRE WATER BEFORE ANY SEWER WORKS ARE CARRIED OUT
4. YORKSHIRE WATER IS NOT OBLIGED TO ACCEPT FILTER DRAIN/LAND DRAINAGE RUN-OFF INTO THE PUBLIC SEWER NETWORK OR ADAPTABLE DRAINAGE SYSTEM (DIRECTLY OR IN-DIRECTLY). AN ALTERNATIVE METHOD OF DISPOSAL OF THE LAND DRAINAGE RUN-OFF WILL THEREFORE BE REQUIRED AND YOU WILL HAVE TO LIAISE WITH THE LOCAL AUTHORITY, LAND DRAINAGE SECTION REGARDING THE DISPOSAL OF THE FILTER DRAIN/LAND DRAINAGE RUN-OFF
5. THE ADAPTABLE SEWERS SHOULD BE A MINIMUM OF 1m AND MANHOLES 0.5m KERB FACES AND SERVICE MARGINS.
6. SEWERS MUST HAVE 5 METRES CLEARANCE FROM TREES AND HEDGES OR THE WIDTH OF THE CANOPY AT MATURE HEIGHT.
7. SEWERS TO BE LAID IN CLASS "S" BEDDING (150mm GRANULAR BED AND SURROUND), WHERE DEPTH OF COVER TO TOP OF THE SEWER IS LESS THAN 1.2m HIGHWAYS AND VERGES (OR LESS THAN 900mm IN NONVEHICULAR ACCESS AREAS) THEN A CONCRETE SLAB SHOULD BE PROVIDED ABOVE GRANULAR BED AND SURROUND.
8. BEDDING AND BACKFILL MATERIAL TO CONFORM TO THE REQUIREMENT OF WATER INDUSTRY SPECIFICATION 4-08-02 (TABLE A2)
9. YORKSHIRE WATER POLICY IS THAT TYPE "C" BRICK MANHOLES AND 1050mm DIAMETER MANHOLE RINGS ARE NOT PREFERRED. INSTEAD, IT IS PREFERRED THAT YOU USE A TYPE "B" MANHOLE WITH 1200mm DIAMETER OR 1500mm DIAMETER RINGS, WITH THE OPENING SITED OVER THE CHANNEL WHERE THE DEPTH OF COVER TO PIPE SOFFIT IS 1-1.5m
10. ADAPTABLE PLASTIC SEWER PIPES TO BE BSI KITEMARKED (CERTIFIED TO WIS 4-35-01 AND BS EN13476). ADAPTABLE PLASTIC SEWER PIPES TO BE LAID IN MAXIMUM 3 METRE LENGTHS UNLESS THERE IS A SPECIFIC OPERATIONAL NEED TO LAY LONGER LENGTHS. PLASTIC CHANNEL SECTIONS IN MANHOLES ARE NOT ACCEPTABLE AND YORKSHIRE WATER WOULD REQUIRE CLAY WARE CHANNEL IN MANHOLES
11. THE MINIMUM CRUSHING STRENGTH FOR CLAY PIPES SHOULD BE AS FOLLOWS:  
100mm DIA - 40kN/m  
150mm DIA - 40kN/m  
225mm DIA - 45kN/m  
300mm DIA - 72kN/m

THE MINIMUM CRUSHING STRENGTH FOR CONCRETE PIPES SHOULD BE - (CLASS 120 TO EN1916/BS5911-1 2002) PLASTIC PIPES SHOULD CONFORM TO WIS-4-35-01 AND BS EN13476

12. WHERE A B125 COVER AND FRAME HAS BEEN APPROVED, THIS MUST NOT BE COATED IN PLASTIC AND MUST HAVE LIFTING EYES SUITABLY SIZED TO ACCOMMODATE STANDARD LIFTING KEYS. SCREW DOWN COVERS ARE NOT ACCEPTABLE
13. THERE MUST BE ENOUGH CLEARANCE AT CROSSOVERS TO ACCOMMODATE BEDDING TO BOTH PIPES, APPROX 300mm : IF CROSSOVER IS NEAR THE ROCKER THEN THE CLEARANCE NEEDED MAY NEED TO BE INCREASED

LEGEND

- PROPOSED SURFACE WATER SEWER MANHOLE
- PROPOSED FOUL WATER SEWER MANHOLE
- PROPOSED COMBINED SEWER MANHOLE
- EXISTING GROUND LEVELS
- EXISTING SURFACE WATER MANHOLE
- EXISTING FOUL WATER MANHOLE
- EXISTING COMBINED WATER MANHOLE
- PROPOSED FOUL 600MMØ UPVC / 1200MMØ PCC DRAG OUT MH (TBC WITH UU FIELD INSPECTOR)
- PROPOSED SURFACE WATER 600MMØ UPVC / 1200MMØ PCC DRAG OUT MH (TBC WITH UU FIELD INSPECTOR)
- PROPOSED SURFACE WATER CATCH PIT MANHOLE 1200MMØ PCC DRAG OUT MH (TBC WITH UU FIELD INSPECTOR)
- PROPOSED SURFACE WATER DRAIN WITH 450mmØ INSPECTION CHAMBER
- PROPOSED FOUL WATER DRAIN WITH 450mmØ INSPECTION CHAMBER
- HIGHWAY GULLY
- 25.000 FINISHED FLOOR LEVEL
- DISHED CHANNEL (OR SIMILAR)

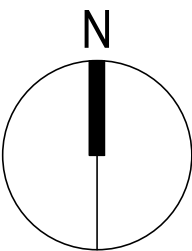

|     |            |                           |     |     |     |
|-----|------------|---------------------------|-----|-----|-----|
| P01 | 31.03.2026 | PRELIMINARY DRAWING ISSUE | JCM | JCM | JCM |
| REV | DATE       | DESCRIPTION               | BY  | CHK | APP |

|                 |             |
|-----------------|-------------|
| DRAWING STATUS: | PRELIMINARY |
|-----------------|-------------|

|         |            |
|---------|------------|
| CLIENT: | MACROOFING |
|---------|------------|

|            |                        |
|------------|------------------------|
| ARCHITECT: | ARCHITECTURAL EMPORIUM |
|------------|------------------------|

|          |                                         |
|----------|-----------------------------------------|
| PROJECT: | LAKESIDE VIEW,<br>HALEWOOD<br>LIVERPOOL |
|----------|-----------------------------------------|

|        |                                         |
|--------|-----------------------------------------|
| TITLE: | OUTLINE DRAINAGE<br>LAYOUT SHEET 3 OF 3 |
|--------|-----------------------------------------|

|         |             |         |            |          |       |      |      |             |      |
|---------|-------------|---------|------------|----------|-------|------|------|-------------|------|
| STATUS: | PROJECT No. | PROJECT | ORIGINATOR | VOLU/SYS | LEVEL | TYPE | ROLE | DRAWING No. | REV: |
| S3      | 225-268     | LVH -   | AJP -      | ZZ -     | 00 -  | DR - | C -  | 1003        | P01  |

|             |           |        |          |           |            |
|-------------|-----------|--------|----------|-----------|------------|
| SCALE @ A1: | DESIGNED: | DRAWN: | CHECKED: | APPROVED: | DATE:      |
| 1:250       | JCM       | JCM    | JCM      | JCM       | MARCH 2026 |