




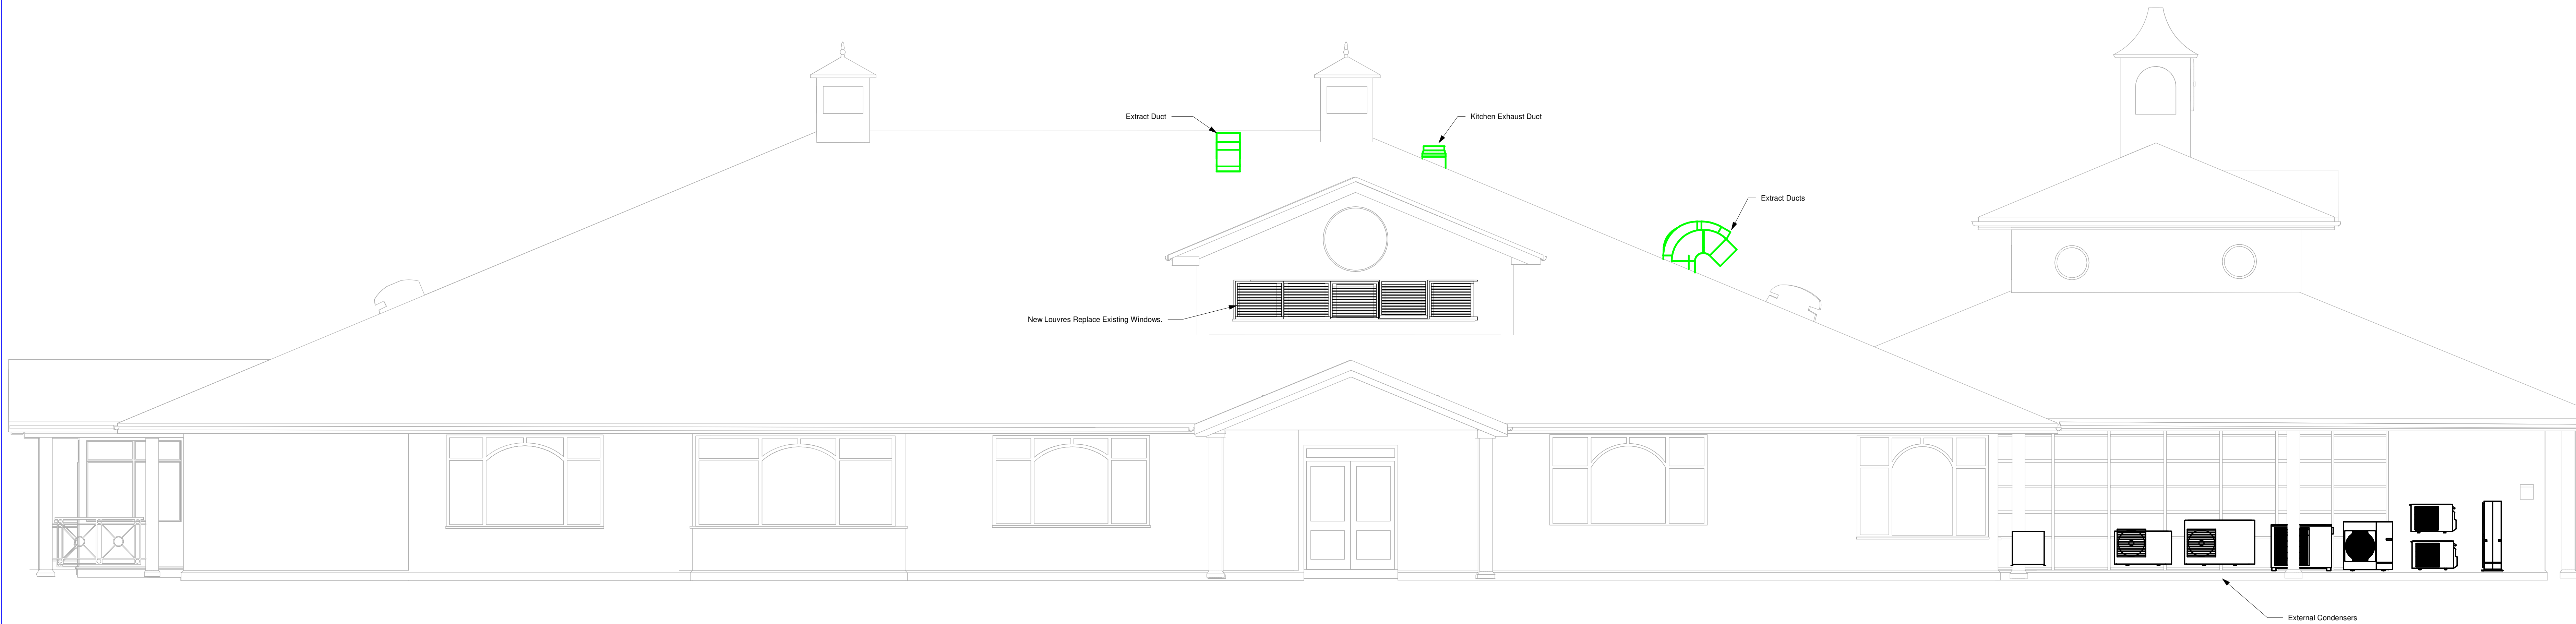


WEST ELEVATION

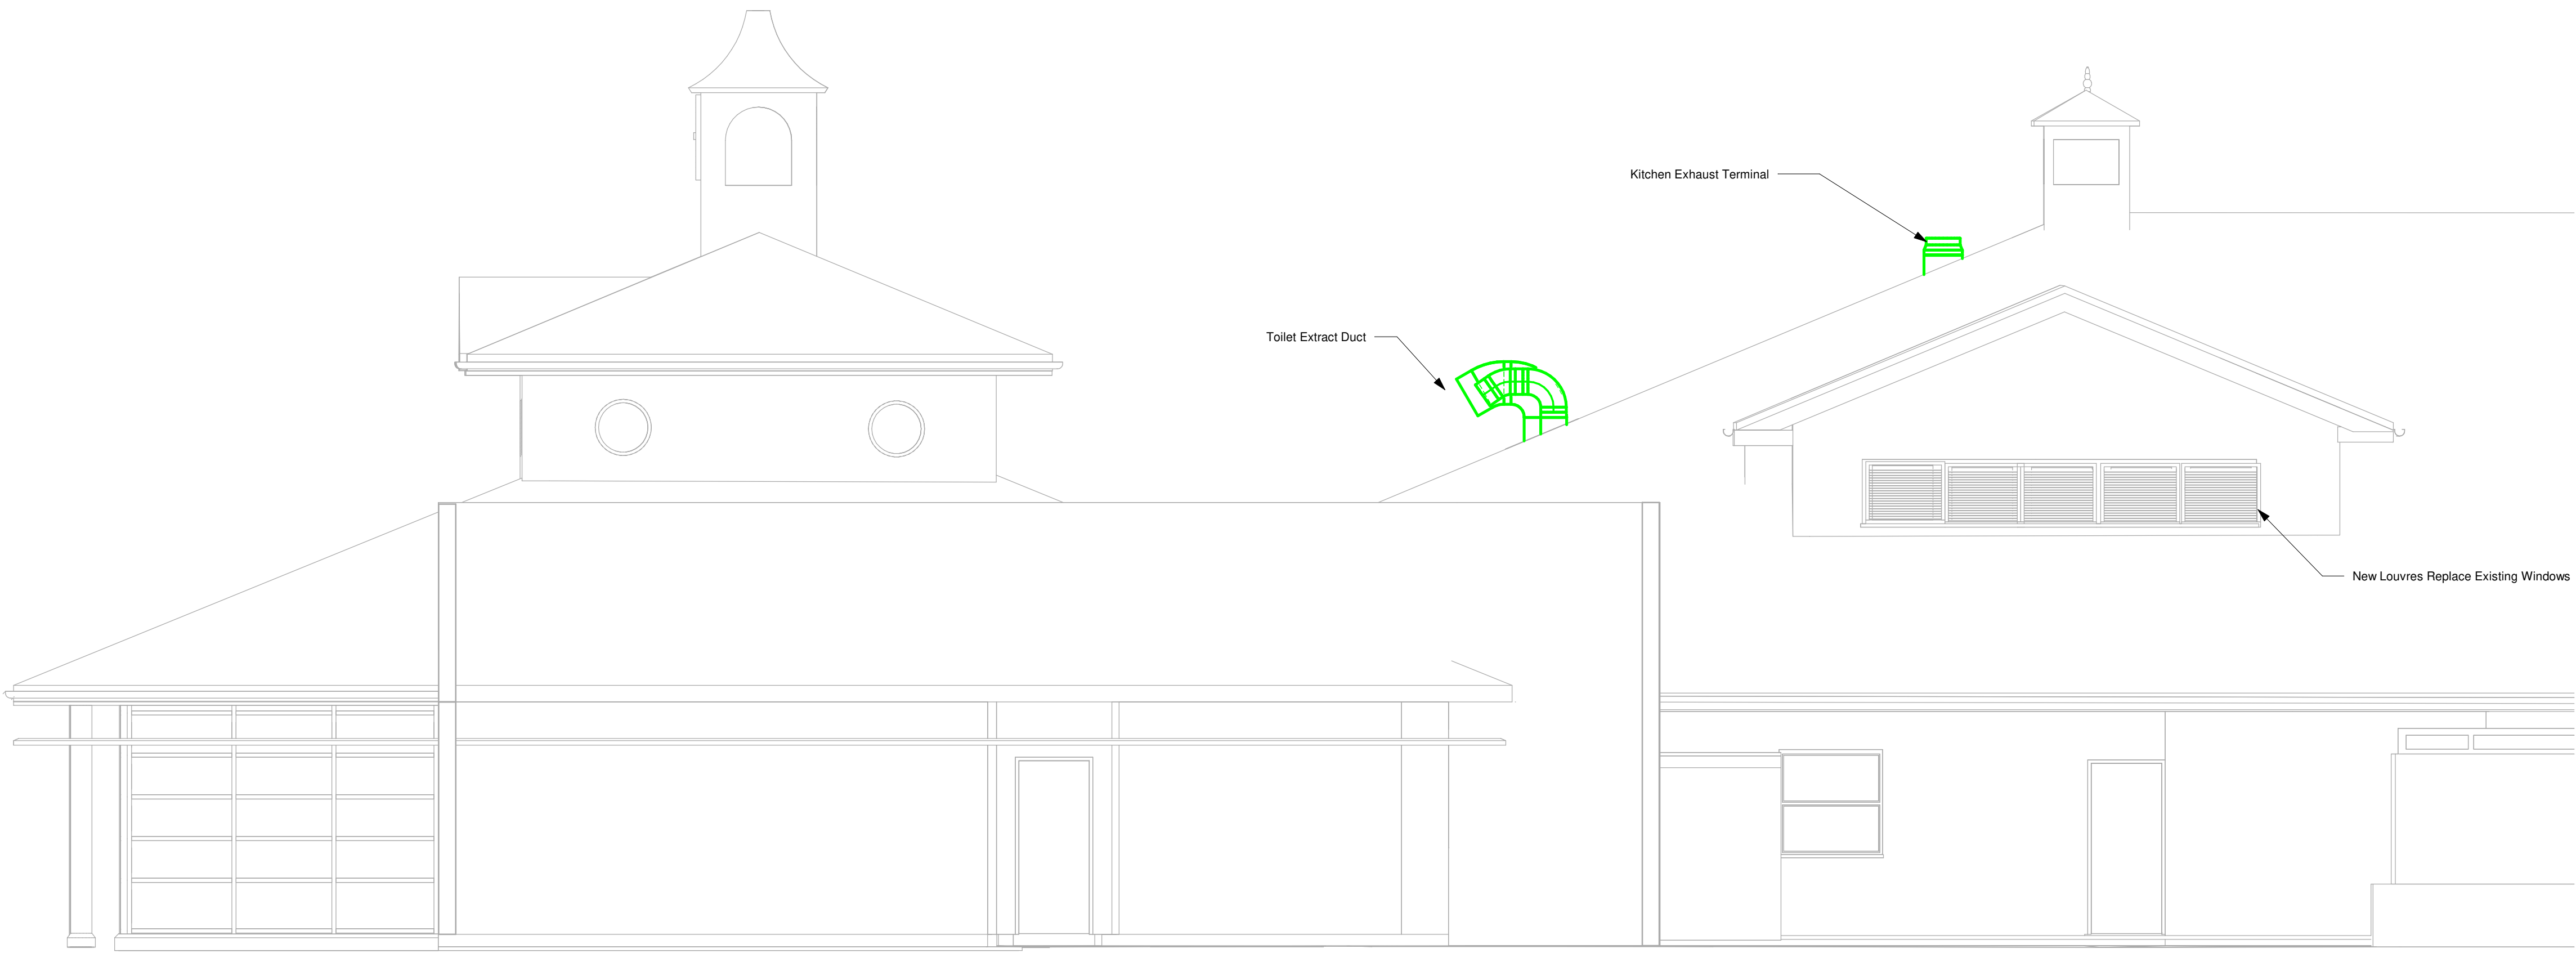


EAST ELEVATION

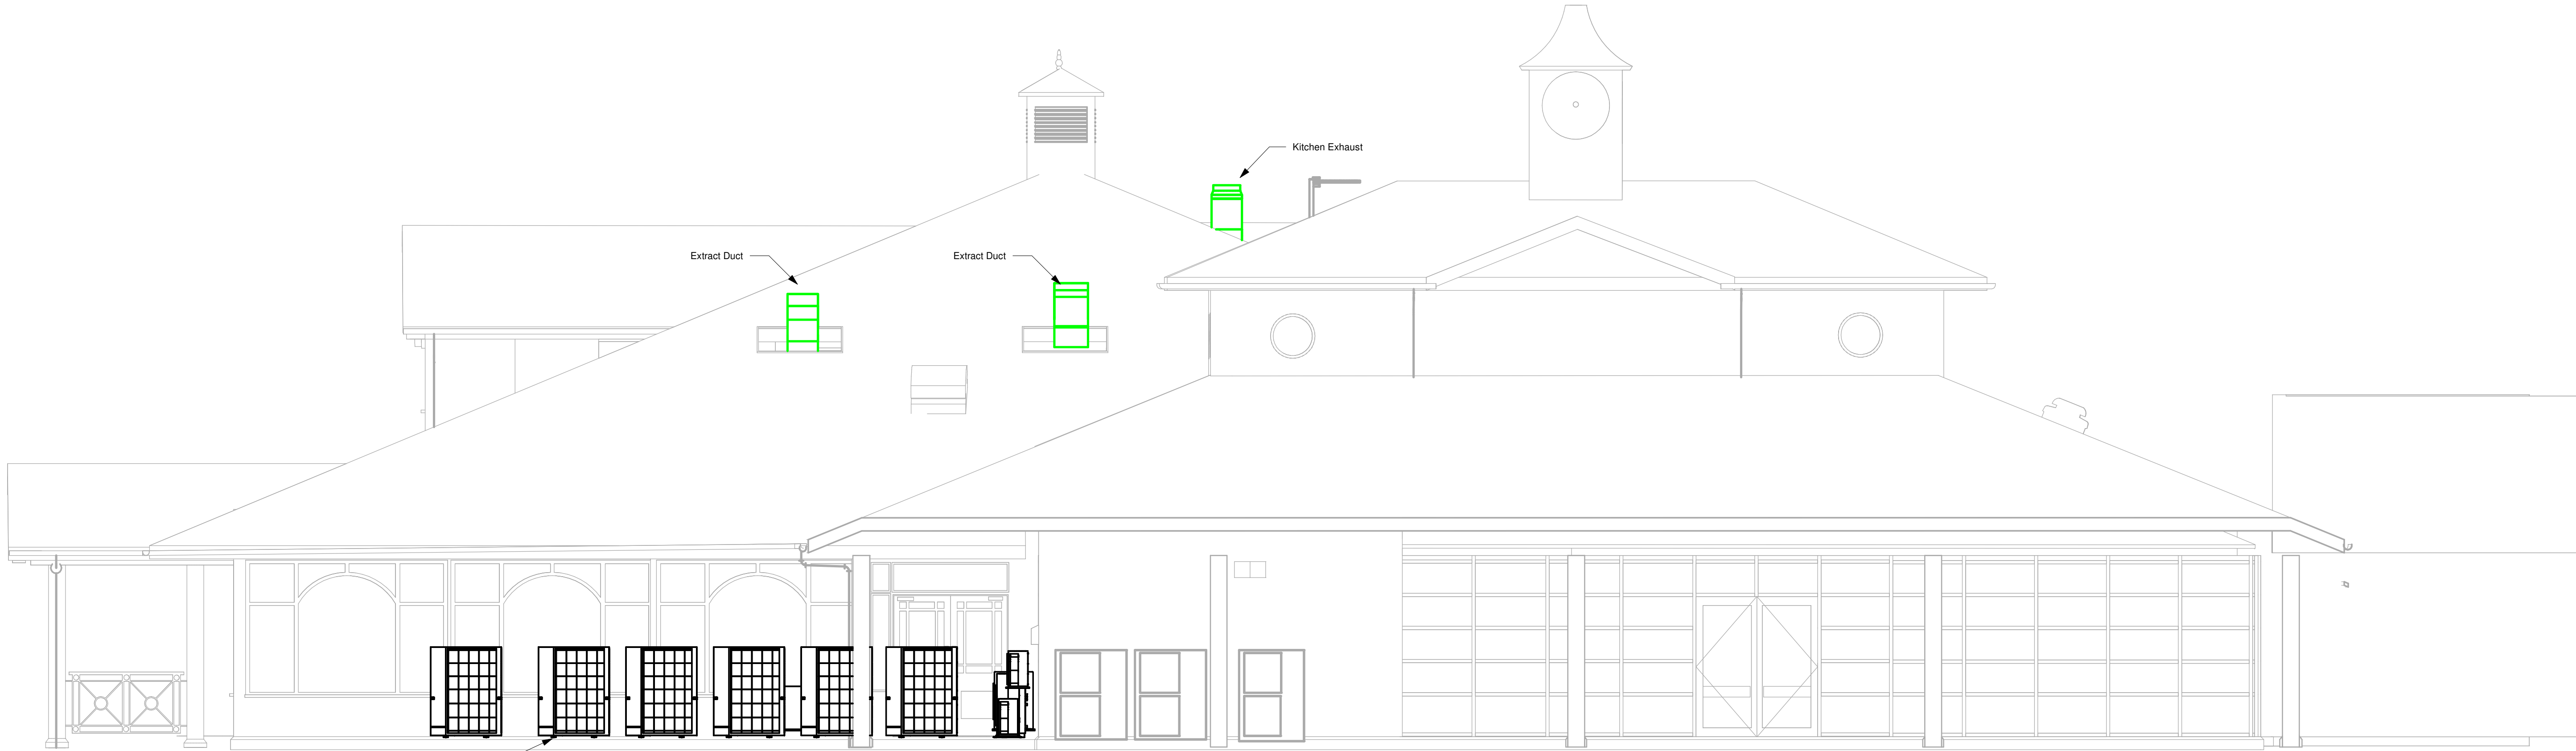

SOUTH ELEVATION

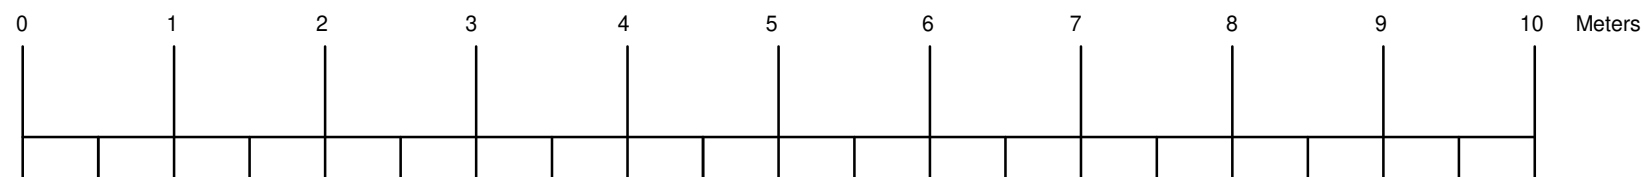

SCALE BAR

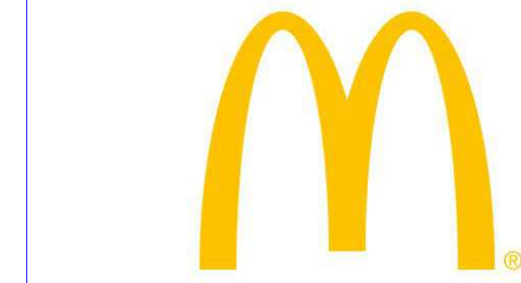

ALL DIMENSIONS ARE APPROXIMATE & MUST BE CHECKED.
DO NOT SCALE THIS DRAWING.
THIS DRAWING MUST BE READ IN CONJUNCTION WITH ALL ASSOCIATED RELEVANT DRAWINGS & DOCUMENTATION.
BEFORE WORKS START ON SITE CDM PARTNERSHIP MUST BE INFORMED OF ANY VARIATIONS OR DISCREPANCIES ON SITE.

1. Comply with McDonald's Standard Specification for HVAC Services.
2. Fit stainless steel drain trays under HVAC condensers arranged to fall to 20mm drain socket & copper drain pipes routed to discharge over local gully. Where no gas heating is present, fit pipe trace heating & insulation and high capacity gutter trace heating within trays incl control & connection to electrical supply provided by electrical contractor.
3. Fit 20mm copper trapped AHU drains to discharge over local gully. Minimum 150mm drop-in & 20mm trap water depth.
4. Duct heights for guidance only. Contractor to check for site co-ordination.
5. HVAC contractor to verify sizes of refrigeration pipework prior to installation.
6. Use insulated supply return ductwork.
7. Fit M10 through bolted opposing flange plate to sandwich partition to flanged frame type fire dampers (or demonstrate compliance with manufacturer's specific fitting instructions).
8. Fit vision screens to un ducted return air transfer grilles.
9. Maintain existing fire compartment barriers.
10. Ensure ceiling access is provided to all duct cleaning access panels including any not identified on drawing.

AMENDMENTS		
REF	DATE	DESCRIPTION
A	09/12/25	Scale Bar Added



McDONALD'S RESTAURANTS
CHAPLE BROOK
TARBOCK GREEN
LIVERPOOL L36 6AD #2728

HVAC
EXTERNAL ELEVATIONS

06/11/25	DLG
1 : 50	9796/ M1003/A/

PRELIMINARY ISSUE