

KEY

- TG

TOUGHENED GLASS
- OG


OBSCURE GLAZING
- ES

EMERGENCY ESCAPE
- GUARD RAIL FITTED IN FIRST FLOOR OPENING REVEALS AS SHOWN, SITE INSTALLED AT 1015MM ABOVE FFL. REFER TO STANDARD DETAILS.

INDICATIVE PV ZONE. INSTALLED WITH AN EXPORT CAPABLE METER. LOCATION, QUANTITY AND ORIENTATION WILL VARY ON A SITE/PLOT BASIS.

SENSOR FOR WEATHER COMPENSATION KIT TO BE PLACED ON NORTH/NORTHEAST ELEVATION (POSITION SHOWN IS INDICATIVE) AVOIDING HEATING EFFECT FROM THE BOILER FLUE.
KITCHEN EXTRACT GRILLE.

BALANCED FLUE BOILER EXTRACT TAKEN THROUGH TO EXTERNAL GRILLE ENSURE 300MM MIN. CLEAR DISTANCE FROM ANY OPENING AND 600MM MIN. FROM BOUNDARY LINE, 150MM MIN. FROM A RWP.

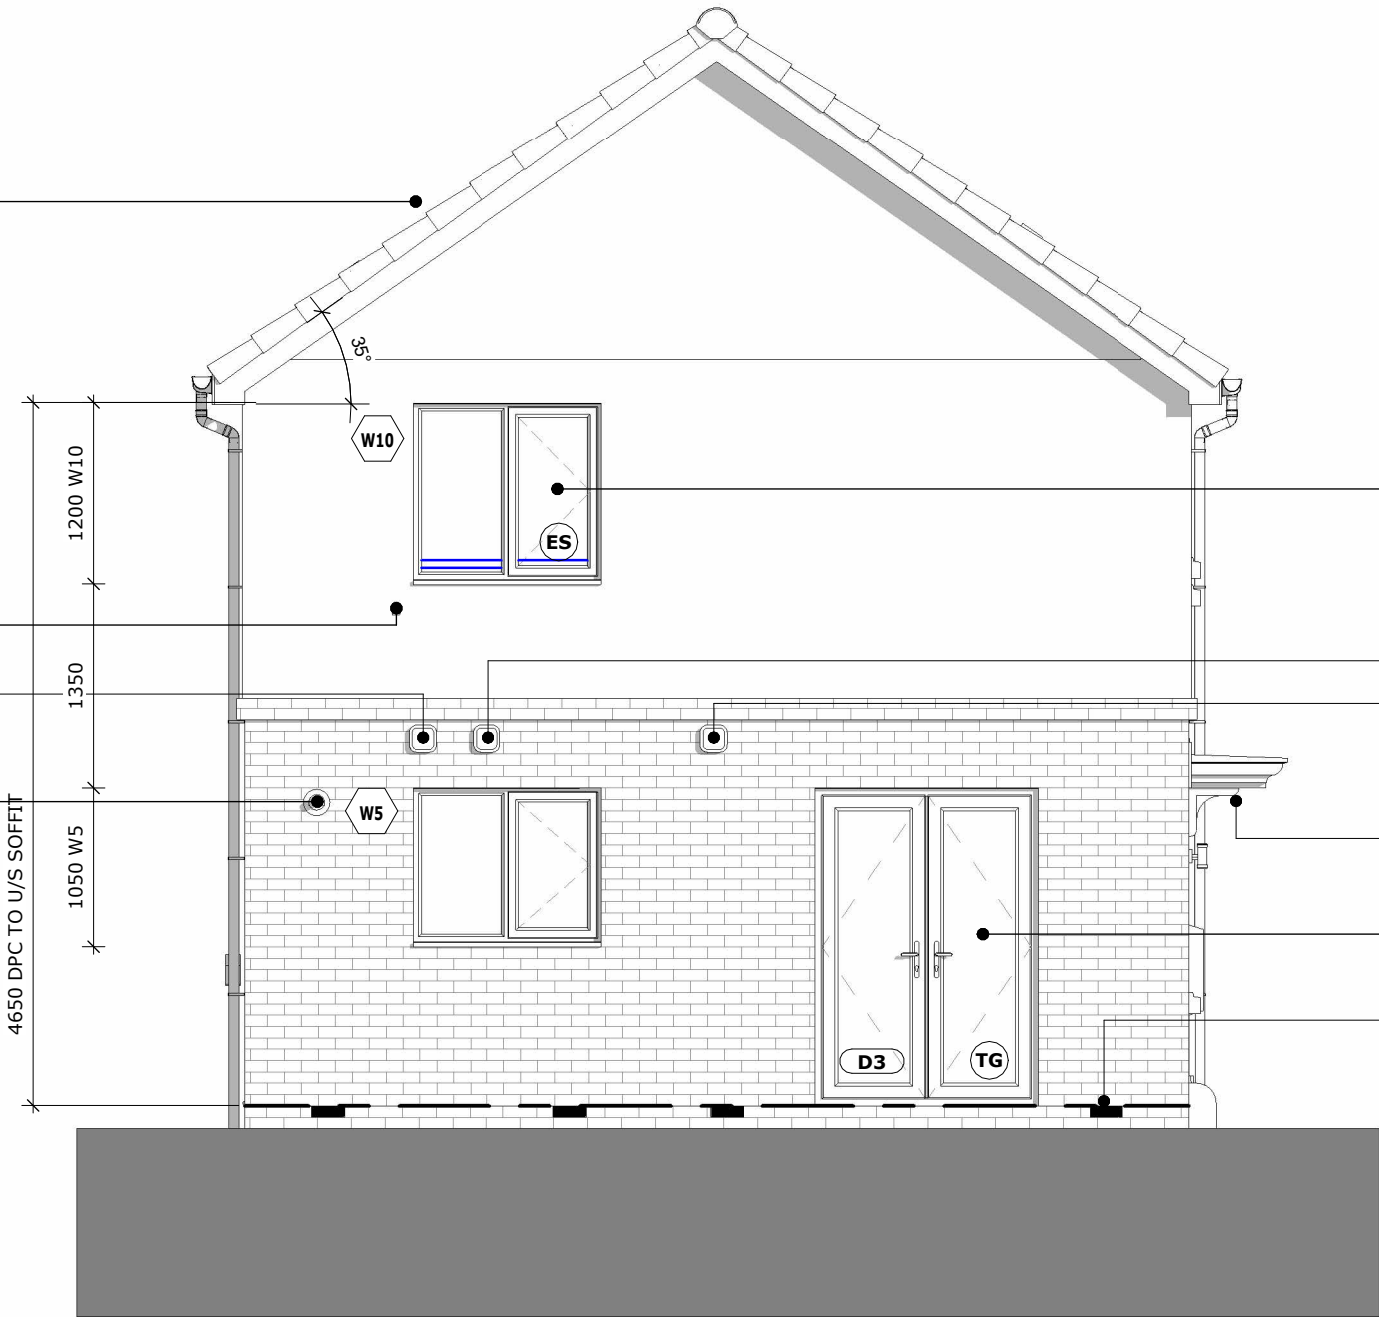

U-VALUE OF WINDOW CASEMENTS NOT TO EXCEED 1.30 W/m²K. WITH A MAXIMUM G VALUE FOR THE GLASS OF 0.47.

UTILITY EXTRACT GRILLE.
W.C. EXTRACT GRILLE.

G.R.P. CANOPY TO MANUFACTURER'S DETAILS.

U-VALUE OF FRENCH DOORS NOT TO EXCEED 1.40 W/m²K. WITH A MAXIMUM G VALUE FOR THE GLASS OF 0.40.

VENT BRICKS FOR SUSPENDED FLOOR.

LEFT ELEVATION

							site
Lickers Lane - Halsnead							
scale							plot numbers
1 : 50							Focal Point Character
housetype							description
MOU	L.H. Side Elevation - Focal Point Character						
suitability							revision
For Construction							01
project	originator	volume	level	type	role	Class	number
NWest	- LIN	- TMOU011A-	XX	- D2	- A	- AS	- FP402

Linden
HOMES

The Mountford