


# Indicative Hard Landscape Plan 1:1000 @ A1

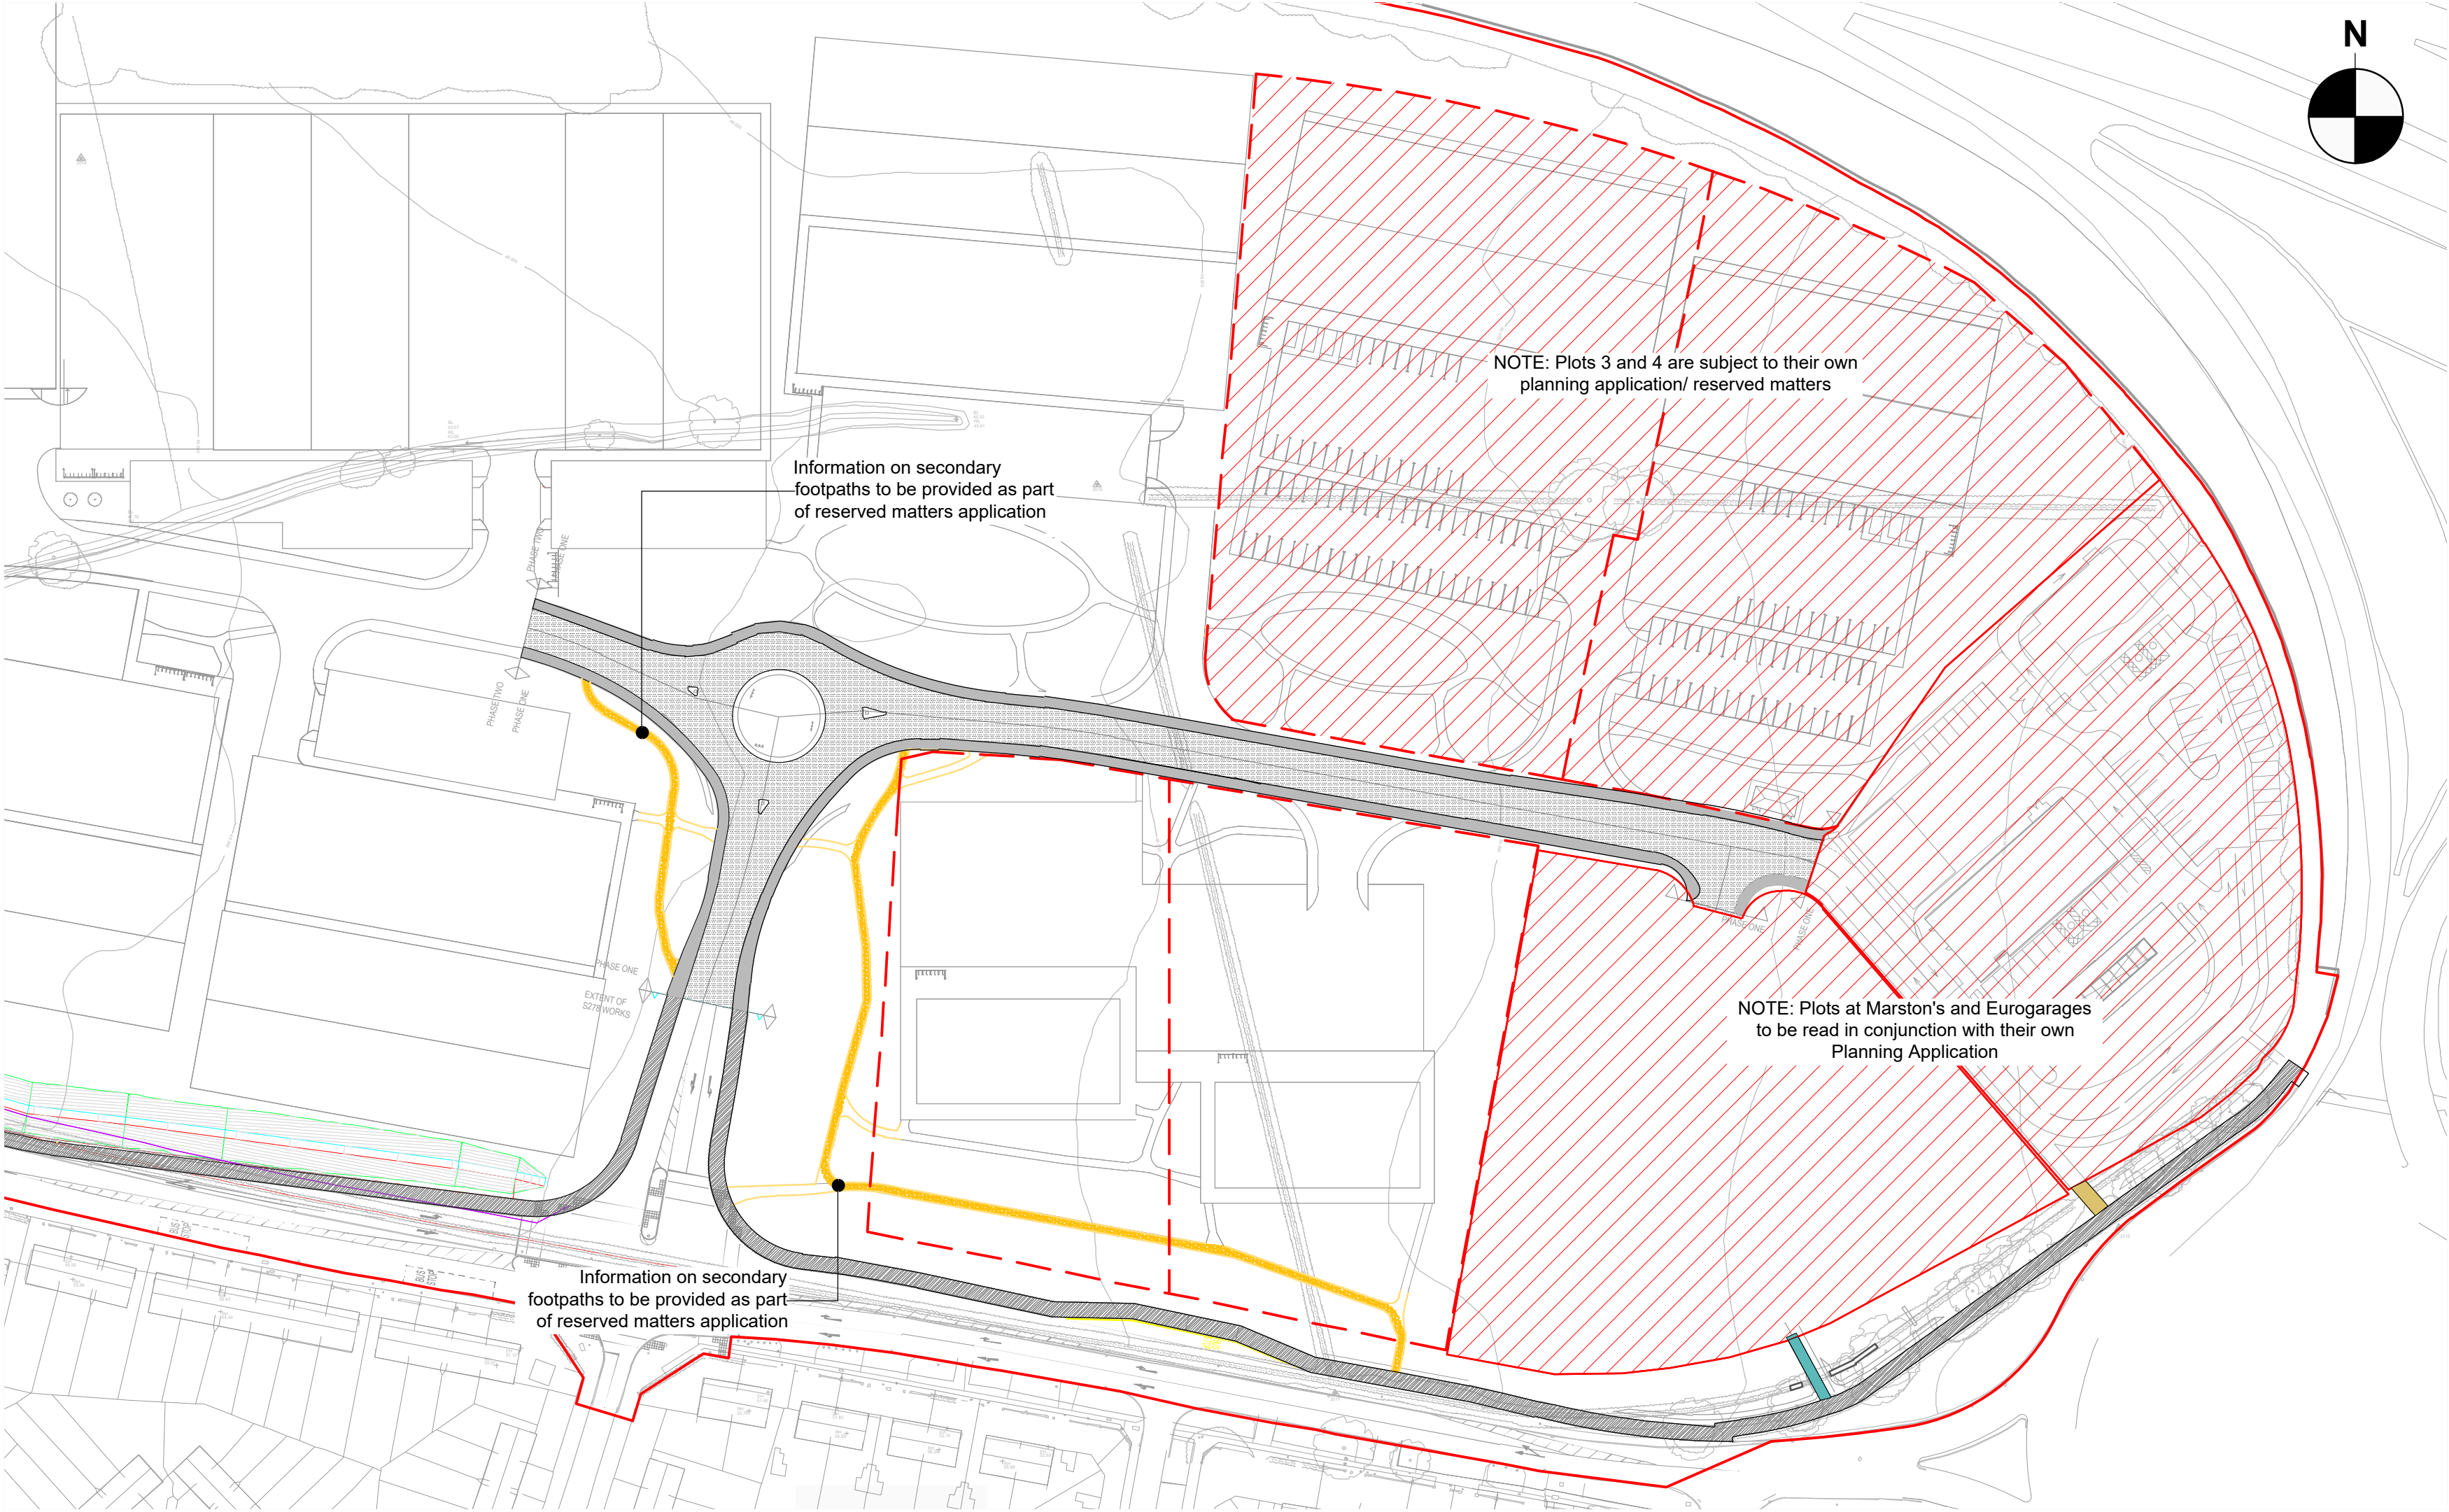

## KEY

### Existing Landscape

- Application Site Boundary
- Phase II Boundary  
*Area not detailed on plan, subject to agreement.*
- Featured Application Area  
*Hard Landscape Proposals for area detailed by other planning application.*

### General Hard Landscape

- Extended Footway to Knowsley Lane  
*Surface to be agreed, proposals prepared by Mott MacDonald.*
- Road Surfaces  
*Road Surface within site to be agreed. Proposals prepared by Mott MacDonald Ltd.*
- Internal Footways  
*Macadam, or similar and approved, to footways within the interior of the site. Edged on both sides with block paving, laid in a running course.*

### Feature Paving

- Feature Paving Type #1  
*Product agreed by Marston's, Marshalls Tegula sett paving. Paving to be laid in random pattern on sand bed.  
Unit Size: 160mm x 160mm x 50mm  
Colour: Traditional*
- Feature Paving Type #2  
*Product to be agreed, Marshalls Keyblock. Paving to be laid in stretcher bond pattern.  
Unit Size: 200mm x 100mm x 80mm  
Colour: Charcoal*

### Pathways

- Pathways & Footpaths  
*Self-binding gravel to pathways within greenspace, landscape buffer and public open space, as shown on plan. Laid to manufacturer's specification.  
Aggregate Size: 12mm, or similar and approved  
Colour: Golden Amber or Buff*

- Tactile Paving  
*Specification and location of tactile crossings to be agreed with highways engineer.*

### Landscape Features

- Feature Walls  
*Gabian walls to specialist design. For details refer to drawing N 066658-CUR-00-XX-DR-D-75109-P04\_SignGA*

- Bollards  
*Specification, number and location to be agreed with highways engineer.*

## GENERAL NOTES

- Plan shows design intent, prepared for Planning Purposes. To be evolved prior to construction
- To be read in conjunction with: Strategic Masterplan [SHF.1439.001.L.D.200.A], Detailed Masterplans [SHF.1439.001.L.D.201 - 202] & Soft Landscape Proposals.
- Materials and extent of hard landscape is indicative, intended to inform planning submission and detailed design.
- For detailed information regarding submission, refer to Design & Access Statement.
- For Drainage & SuDS treatment, refer to engineer's plans.

- Measurements shown in mm, unless otherwise stated.
- Specification of Tactile Paving and Bollards to be agreed by highways engineer.
- Proposals have been based upon: Site Layout prepared by Ryder Architecture, Arboricultural Surveys prepared by Ascerta Ltd., and Highways & Traffic information prepared by Mott MacDonald Ltd.

