
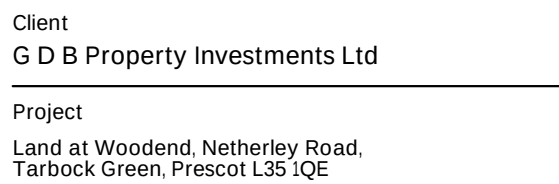






©This drawing is copyright of Condy and Lofthouse Ltd. and may not be reproduced in any way without their specific permission.

All dimensions are to be checked on site. Work to figured dimensions only. Any queries please contact condy lofthouse architects.

- a) high alumina cement in the structural elements;
- b) wood wool slabs in permanent formwork to concrete;
- c) calcium chloride admixtures for use in reinforced concrete;
- d) asbestos or asbestos-containing products, as defined in the 'Control of Asbestos at Work Regulations, as amended 2007 or any other statutory modification or re-enactment thereof';
- e) any naturally occurring or man made mineral fibres (for example, rock-wool or slag wool) with a thickness of 3 microns or less and a length of 200 microns or less, unless they are appropriately sealed to prevent migration of fibres;
- f) aggregates for use in reinforced concrete which do not comply with:
 - 'BS EN 12620:2002 Properties of aggregates for concrete'
 - 'BS EN 12620:2002 Properties of aggregates for concrete'
 - 'BS EN 12620:2002 Properties of aggregates for concrete'
- g) BS EN 13038:2002 Properties of aggregates used in mortar.
- h) BS EN 13055 (Parts 1 & 2) properties of lightweight aggregates.
'Guidance on avoiding alkali-silica reaction and limitations on alkalis content in BRE Digest 330 (2004)' & Concrete Society Technical Report 30 (1999);
- i) lead, lead paint or any other materials containing lead which may be ingested, inhaled or absorbed through the skin after any fitting activity; also containing lead are specifically required in drinking water pipework by any relevant statutory requirement or where lead flashings or other lead roof coverings are specifically provided for in the Contract;
- j) urea formaldehyde foam or materials which may release formaldehyde in quantities which may be hazardous with reference to the limits set by the Health and Safety Executive;
- k) calcium silica bricks or tiles;
- l) vermiculite unless it is established by being fibre-free; calcium silica bricks or tiles;
- m) any products containing cadmium referred to in Statutory Instrument 2006/3331 Controls on dangerous substances and preparations Regulations 2006. Reference should also be made to HSE DSG338 Cadmium and ;
- n) any new item treated with pentachlorophenyl;
- o) non galvanised mild steel structural fixings for building elements particularly susceptible to erosion;
- p) concrete used in circumstances where it is susceptible to alkali/silica reaction;
- q) materials containing chlorofluorocarbons (CFC's).
- r) solvents or cleaning fluids which contain stains are unsuitable for unavailable;
- s) any new materials not in accordance with statutory requirements, British Standards, Codes of Practice and good building practice current at the date of incorporation of the relevant materials into the Works or the specifications thereof.



Scale	Date	Drawn By
1:500@A2	April 2022	DBS

FOR APPROVAL

Unit 17 Connect Business Village
24 Derby Road
Liverpool L5 9PR

0151 207 4371
info@condylofthouse.co.uk
www.condylofthouse.co.uk

