


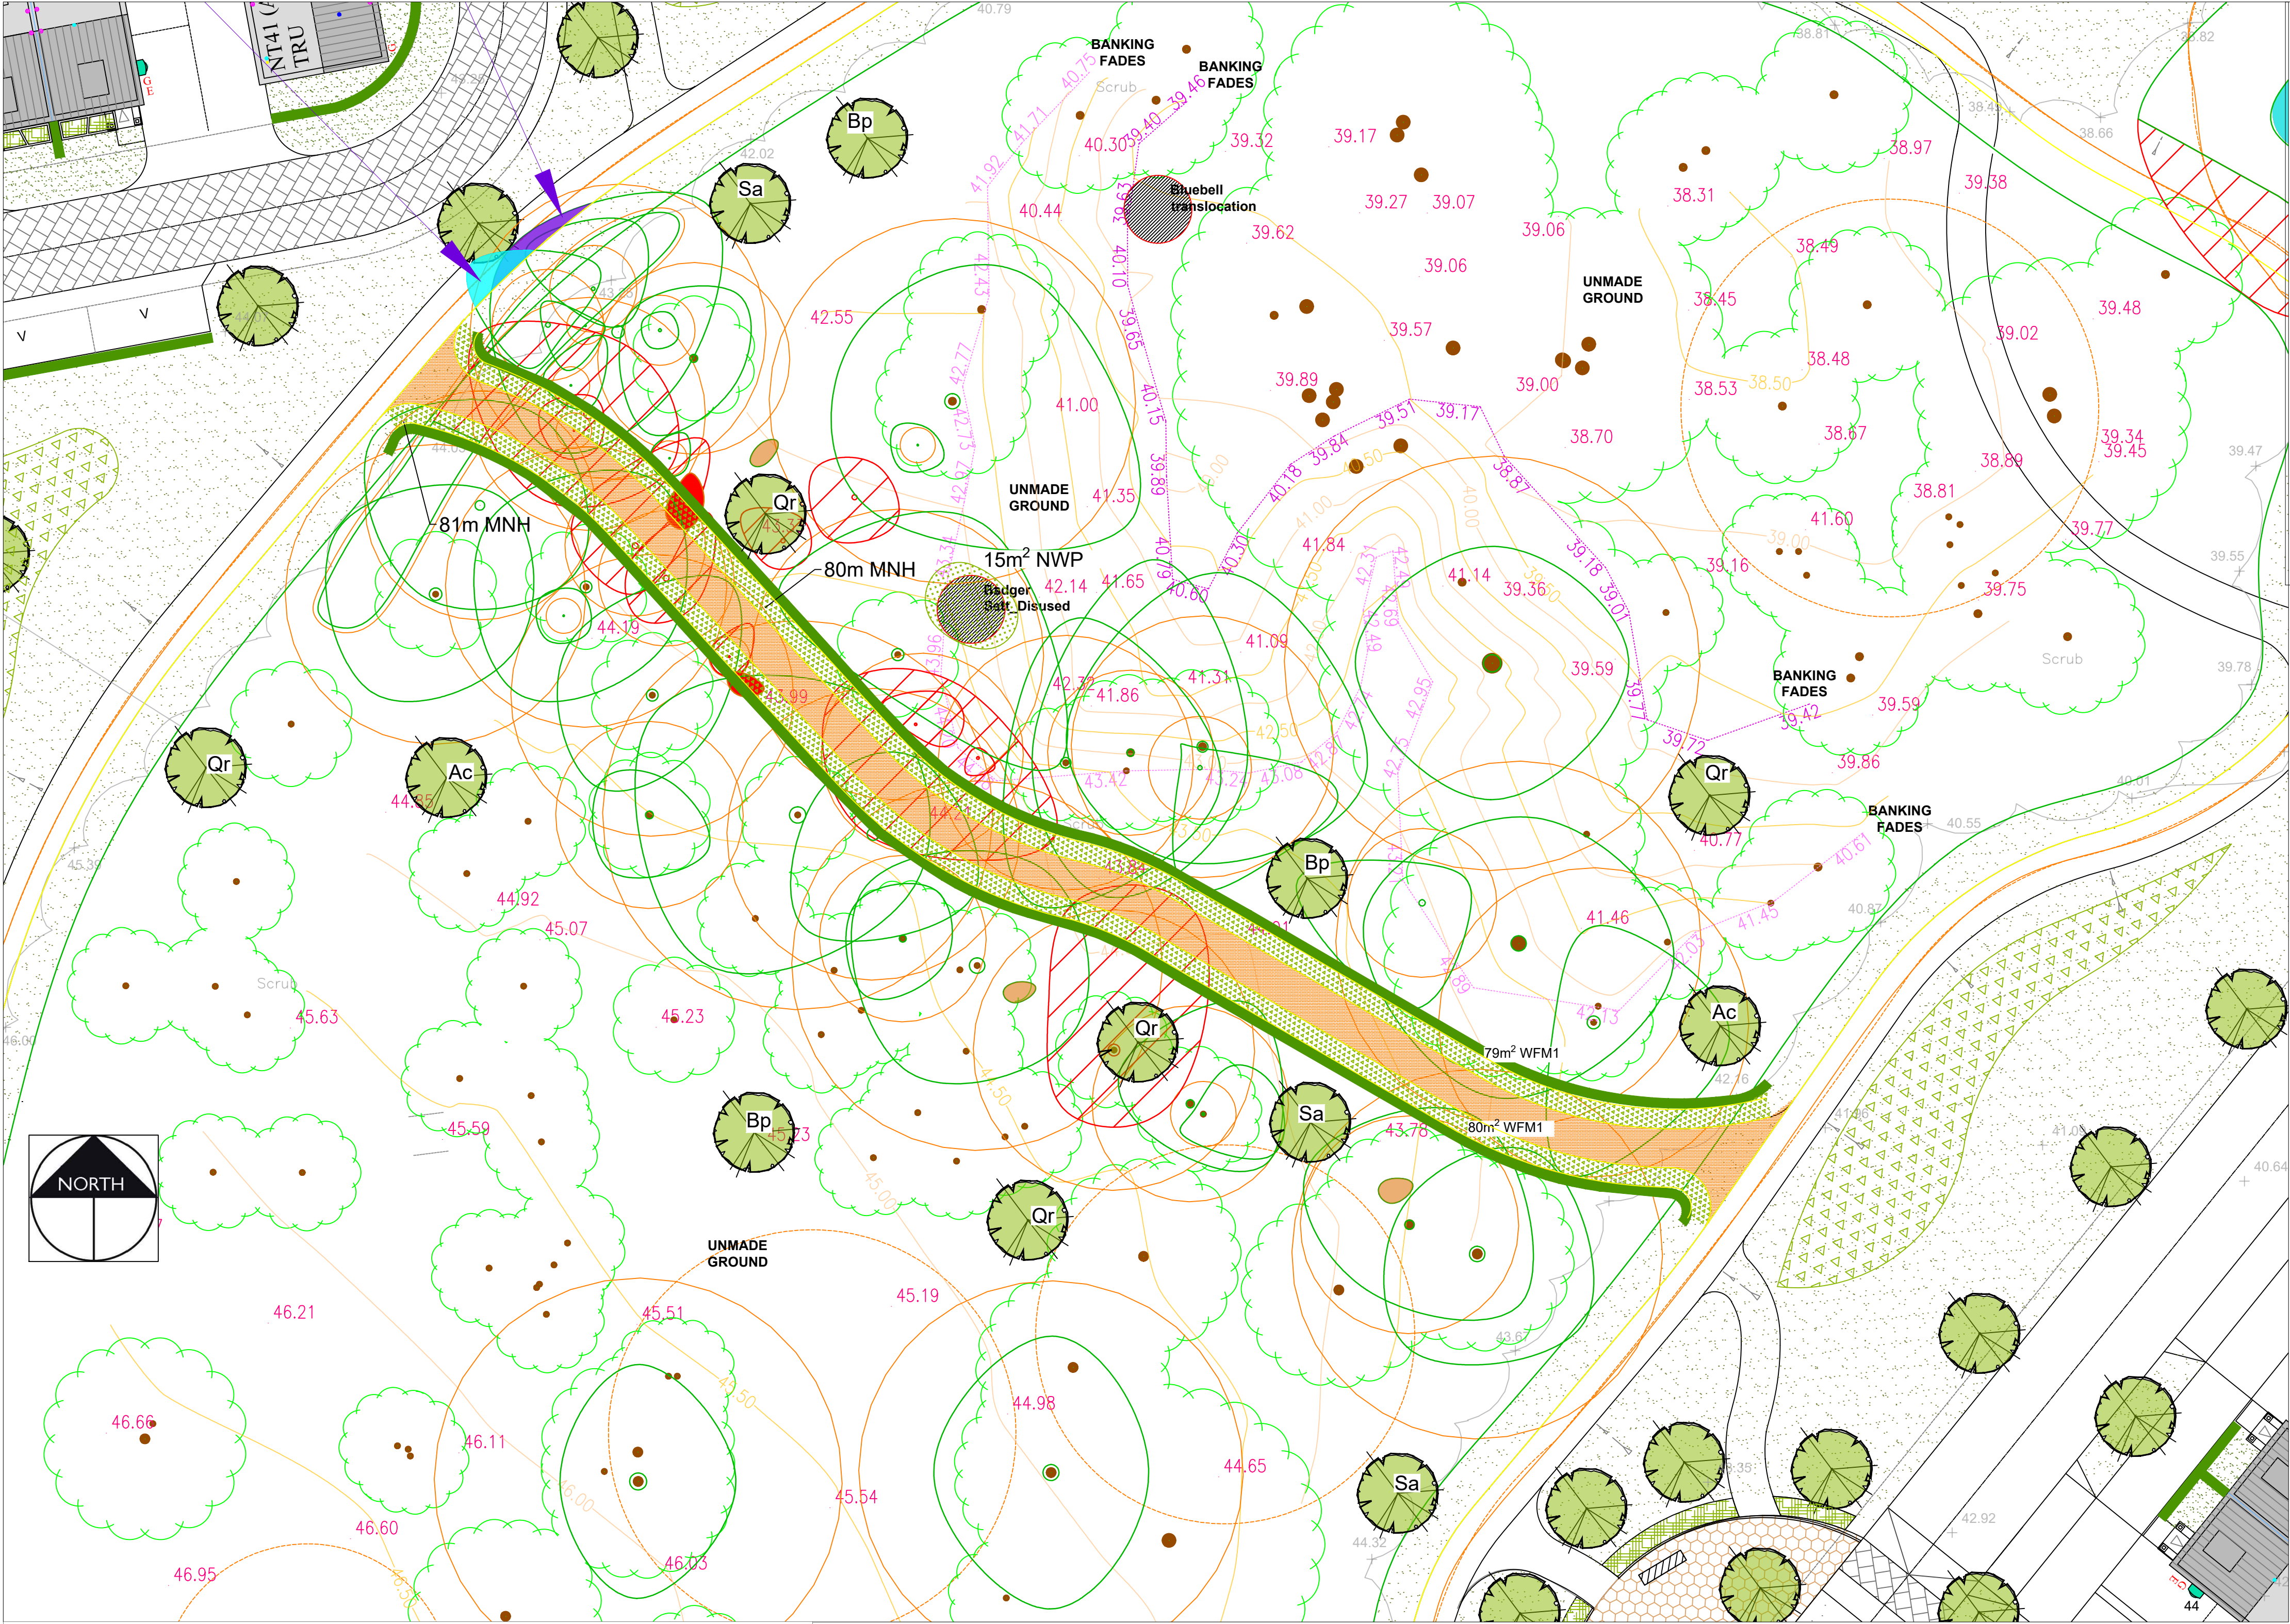

- KEY**
- Proposed Trees Planted in Canopy Gaps in Woodland**
See plant schedule and specification for details on species, nursery grades
 - Root Protection Areas**
Refer to TEP Arboricultural report
 - Proposed Hedgerows**
See plant schedule and specification for details on species, nursery grades and quantities
 - Proposed Wildflower planting**
See plant schedule and specification for details on species, nursery grades and quantities
 - Proposed Native Whip Planting**
See plant schedule and specification for details on species, nursery grades and quantities

P4	21.02.25	Amend Hedge and wildflower Alignment to Path	PGG
P3	29.10.24	Amend Tree Species and Schedule	PGG
P2	11.09.24	Alter Path Alignment	PGG
P1	05.09.24	First Issue	PGG

Rev	Date	Description	Initials
-----	------	-------------	----------

pgla | landscape architects

PGLA Ltd
Landscape Architects
Station Hop Offices
815 Stockport Road
Manchester
M19 3BS

t: 0161 238 9138
e: info@pgla.co.uk
w: www.pgla.co.uk

Client
**GINO FREDERICK FANTIN &
DAWN SARA FANTIN
CATHERINE SARAH JANE GRIFFIN**

TAYLOR WIMPEY UK LIMITED

REYNARD LAND WHISTON LIMITED

Project
FOX WOOD, HALSNEAD

Description
**PLANTING AND SCHEDULE
FOX WOOD PATH REMEDIALS**

Status
FOR COMMENT

Scale	Drawn	Checked	Date
1:200@A1	PGGKJ		Sept 24
Job number	Drawing number	Revision	
HAL1810_	PP02.01	P4	

Trees						
Qty	Code	Botanical Name	Girth/ Dia. cm	Height cm	Root Zone	Specification
2	Ac	Acor campestre	12-14	300-350	RB	Standard
3	Bp	Betula pendula	12-14	300-350	RB	Standard
5	Qr	Quercus robur	12-14	300-350	RB	Standard
3	Sa	Sorbus aucuparia	12-14	300-350	RB	Standard

Mixed Native Hedge (MNH)						
Total length: 161m (planted in double staggered rows)						
%Mix	Qty	Botanical Name	Size in cm	Root Condition / Pot size (c)	Density / Spacing	Notes
20	193	Corylus avellana	60-90	B	6/m	1+1; Transplant
40	386	Crataegus monogyna	60-90	B	6/m	1+1; Transplant
10	97	Rosa canina	60-90	B	6/m	1+1; Transplant
10	97	Ilex aquifolium	60-90	B	6/m	1+1; Transplant
20	193	Viburnum opulus	60-90	B	6/m	1+1; Transplant

Native Whip Planting (NWP) Native planting % mix for Native Woodland as in Halsnead Design Guide						
Total Area: 159m ² (Random planting 1 per m ²)						
%Mix	Qty	Botanical Name	Size in cm	Root Condition / Pot size (c)	Density / Spacing	Notes
10	2	Betula pendula	60-90	B	1/m ²	1+1; Transplant
10	2	Carpinus betulus	60-90	B	1/m ²	1+1; Transplant
10	2	Corylus avellana	60-90	B	1/m ²	1+1; Transplant
10	2	Crataegus monogyna	60-90	B	1/m ²	1+1; Transplant
10	2	Ilex aquifolium	60-90	B	1/m ²	1+1; Transplant
40	6	Quercus robur	60-90	B	1/m ²	1+1; Transplant
10	2	Sorbus aucuparia	60-90	B	1/m ²	1+1; Transplant

Wildflower Planting				
Total Area: 159m ²				
Area m ²	Code	Mix	Composition	Sowing Rate
159	WFM1	Wildflower mix - EW1 Woodland Mixture Emorsgate Seeds	Refer to supplier for mix details. Wildseed.co.uk Supplies or similar approved	5g/m ²
				As per suppliers recommendations