

Tree Work Schedule			
No.	Species	Works	Category
T18	Silver birch	Fell to ground level, remove stump	C1
T21	Silver birch	Fell to ground level, remove stump	B1
T22	Silver birch	Fell to ground level, remove stump	B1
T23	Unknown	Fell to ground level, remove stump	U
T25	Silver birch	Fell to ground level, remove stump	B1
T26	Cherry	Fell to ground level, remove stump	B1
T28	Swedish whitebeam	Fell to ground level, remove stump	C1
T30	Swedish whitebeam	Fell to ground level, remove stump	C1
T31	Silver birch	Fell to ground level, remove stump	B1
T32	Swedish whitebeam	Fell to ground level, remove stump	C1
T33	Swedish whitebeam	Fell to ground level, remove stump	C1
T34	Swedish whitebeam	Fell to ground level, remove stump	C1
T35	Swedish whitebeam	Fell to ground level, remove stump	C1
T36	Swedish whitebeam	Fell to ground level, remove stump	B1
T47	Sycamore	Fell to ground level, remove stump	C1
T50	Turkey oak	Fell to ground level, remove stump	C1
T57	Sorbus sp.	Fell to ground level, remove stump	C1
T58	Sorbus sp.	Fell to ground level, remove stump	C1
T59	Sorbus sp.	Fell to ground level, remove stump	U
T62	Turkish hazel	Fell to ground level, remove stump	C1
T65	Hornbeam	Fell to ground level, remove stump	C1
T71	Lime	Fell to ground level, remove stump	B1
T72	Noway maple	Fell to ground level, remove stump	B1
T73	Noway maple	Fell to ground level, remove stump	B1
T74	Noway maple	Fell to ground level, remove stump	B1
T75	Noway maple	Fell to ground level, remove stump	B1
T76	Noway maple	Fell to ground level, remove stump	B1
T77	Noway maple	Fell to ground level, remove stump	B1
T78	Noway maple	Fell to ground level, remove stump	B1
T79	Beech	Fell to ground level, remove stump	B1
T80	Beech	Fell to ground level, remove stump	C1
T81	Oak	Fell to ground level, remove stump	A1
T82	Cotoneaster	Fell to ground level, remove stump	C1
T85	White poplar	Fell to ground level, remove stump	B1
T86	Noway maple	Fell to ground level, remove stump	B1
T87	Noway maple	Fell to ground level, remove stump	B1
T90	Alder	Fell to ground level, remove stump	C1
T101	Silver birch	Fell to ground level, remove stump	B1
T104	Lime	Fell to ground level, remove stump	B1
T105	Catalpa pear	Fell to ground level, remove stump	C1
T106	Cider gum	Fell to ground level, remove stump	C1
T107	Sorbus sp.	Fell to ground level, remove stump	C1
T108	Sorbus sp.	Fell to ground level, remove stump	C1
T109	Swedish whitebeam	Fell to ground level, remove stump	C1
T110	Alder	Fell to ground level, remove stump	C1
G01	Various	Partial removal of group	B2
G02	Hornbeam	Removal of group	C2
G04	Various	Partial removal of group	B2
G05	Beech	Removal of group	B2
G06	Beech	Removal of group	B2
G07	Various	Partial removal of group	B2
G10	Various	Removal of group	C2
G11	Various	Removal of group	B2
G12	Various	Partial removal of group	B2
G13	Silver birch	Removal of group	B2
G15	Various	Partial removal of group	B2
H1	Privet	Partial removal of hedge	C2
H2	Privet	Partial removal of hedge	C2
H12	Various	Partial removal of hedge	C2
H14	Various	Partial removal of hedge	C2
H15	Yew	Removal of hedge	C2
H16	Various	Removal of hedge	C2
H17	Yew	Removal of hedge	C2
H18	Yew	Removal of hedge	C2
H20	Lavender	Partial removal of hedge	C2
H21	Yew	Partial removal of hedge	C2
H23	Yew	Removal of hedge	C2

All tree work is to be undertaken in accordance with British Standard BS 3998:2010 Tree work - Recommendations.			
All existing trees to be removed and the site is to be left as found. Care is to be taken of the ground around retained trees to make sure that it does not become compacted as a result of tree surgery operations. No equipment or vehicles such as timber lorries, tractors, excavators or cranes shall be parked or driven beneath the crowns of any retained trees, to prevent subsequent compaction and root death.			
No. of individual trees to be removed			
U	A	B	C
2	1	22	22
No. of groups / hedges to be removed			
U	A	B	C
0 (0)	0 (0)	4 (4)	0 (0)
(1) = Partial removal of a group			
Arboricultural Method Statement			
All tree work is to be undertaken in accordance with British Standard BS 3998:2010 Tree work - Recommendations.			
Please refer to Artech Consulting Ltd. Tree Schedule, Arboricultural Method Statement and Tree Protection Plan, for full details of all surveyed trees and how all aspects of the development may be implemented without detriment to retained trees.			




Sheet 1

Note: No unauthorised excavations are to be carried out within the RPAs of any retained trees. Any level changes must form part of a construction method statement & must protect the rooting environments of all retained trees.

Issue: Proposed hard surfacing is partially situated within RPAs of groups G07 & G08
Solution: Excavations for the hard surfacing within the RPA are to be carried out under arboricultural supervision.

Issue: Proposed hard surfacing replacement is situated within RPAs of trees & groups.
Solution: Proposed resurfacing is to be designed so that it can be constructed entirely above the existing soil level and the existing sub-base is retained.

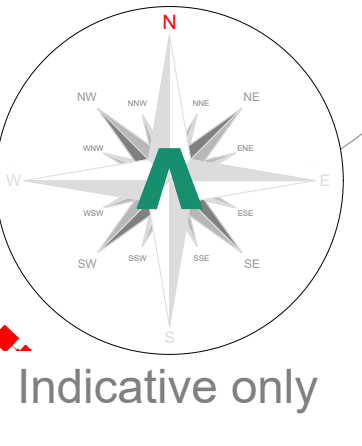

Tree Categories	
Trees are categorised in accordance with the cascade chart in Table 1 of the British Standard BS 5837:2012 'Trees in relation to design, demolition and construction - Recommendations'	
Category 'U' - Trees in such condition that they cannot realistically be retained as living trees in context of the current land use for longer than 10 years.	
Category 'C' - Trees of high quality with an estimated remaining life expectancy of at least 40 years.	
Category 'B' - Trees of moderate quality with an estimated remaining life expectancy of at least 20 years.	
Category 'A' - Trees of low quality with an estimated remaining life expectancy of at least 10 years, or young trees with a stem diameter below 100mm.	
Root Protection Area	
In order to avoid damage to the roots or rooting environment of retained trees, the Root Protection Area (RPA) should be defined around each of the category A, B and C trees. This is a minimum area in m which should be left undisturbed around each retained tree.	
The RPA is calculated using the British Standard BS 5837:2012 'Trees in relation to design, demolition and construction - Recommendations'.	
The calculated RPA is capped to 707m ² , which is the equivalent to a circle with a radius of 15m. Where there appears to be restrictions to root growth the root protection area is reshaped to more accurately reflect the likely distribution of the roots.	
Arboricultural Impacts	
Impacts	Nos. of trees
Trees to be removed	47
Groups / hedges to be removed (Partial removal of groups)	11 (11)
Trees with proposed measures into RPA	0
Groups / hedges with proposed measures into RPA	3
Trees that will require pruning	0
Groups / hedges that will require pruning	0
Trees to be transplanted	0
Groups / hedges to be transplanted	0
Arboricultural Method Statement	
Please refer to Artech Consulting Ltd. Tree Schedule, Arboricultural Method Statement and Tree Protection Plan, for full details of all surveyed trees and how all aspects of the development may be implemented without detriment to retained trees.	

Unit 3, Well House Barns, Chester, CH4 0DH
https://arbtech.co.uk, 01244 661170

Project: Land off Archway Road, Huyton, Metropolitan Borough of Knowsley, Merseyside L36 9UX

Client: Gen8 Kajima Regeneration (Huyton) Limited

Drawing: Arboricultural Impact Assessment Sheet 1 of 2

Based on: SMP-LUD-P1-ZZ-DR-L-91-00-00

Drawing No: Arbtech AIA 01 Rev: A

Date: Jan 2026 Scale: 1:200 @ A0 Drawn: AST

Key: Tree Nos: T1 Tree Categories: Category 'U' trees, Category 'A' trees, Category 'B' trees, Category 'C' trees, Category 'U' trees to be removed, Category 'B' groups, Category 'C' groups, Hard surfacing replacement, Inclusion - Hard surfacing

Arbtech Consulting Ltd. 2025

Arbtech Consulting Ltd. 2025

