

- Notes
1. THIS DRAWING IS THE COPYRIGHT OF TIER CONSULT LTD AND CANNOT BE REPRODUCED IN ANY FORM WITHOUT WRITTEN CONSENT FROM THE COMPANY.
 2. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT ARCHITECT'S, ENGINEERS AND SPECIALISTS DRAWINGS TOGETHER WITH THE APPROPRIATE SPECIFICATION.
 3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE STATED. FOR THE PURPOSES OF CONSTRUCTION THIS DRAWING MUST NOT BE SCALED AND ONLY WRITTEN DIMENSIONS USED. IT IS THE CONTRACTOR'S RESPONSIBILITY TO CHECK ALL DIMENSIONS ON SITE PRIOR TO CONSTRUCTION AND ANY DISCREPANCIES TO BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ENGINEER IN WRITING.
 4. ALL LEVELS ARE IN METRES UNLESS OTHERWISE STATED.

Legend

UNIT 2 CUT AND FILL DEPTHS

SURFACE LEVEL DATA			
NUMBER	MINIMUM LEVEL	MAXIMUM LEVEL	COLOUR
1	-4.708	-3.125	
2	-3.125	-1.750	
3	-1.750	-0.375	
4	-0.375	1.000	
5	1.000	2.375	
6	2.375	3.750	
7	3.750	5.125	
8	5.125	6.249	

BORROW PIT DEPTHS

SURFACE LEVEL DATA			
NUMBER	MINIMUM LEVEL	MAXIMUM LEVEL	COLOUR
1	-1.529	-1.341	
2	-1.341	-1.237	
3	-1.237	-1.139	
4	-1.139	-1.087	
5	-1.087	-1.047	
6	-1.047	-0.730	
7	-0.730	-0.090	
8	-0.090	0.021	

C5	30.01.24	JCB BORROW PIT UPDATED	WNL
C4	19.12.23	JCB TENDER ISSUE	WNL
C3	14.11.23	JCB CUT AND FILL UPDATED WITH NEW TOPOGRAPHIC SURVEY	WNL
C2	30.10.23	JCB UPDATED WITH CHANGES TO ROAD LEVELS	WNL
C1	20.10.23	JCB FORMATIONS UPDATED ISSUED FOR CONSTRUCTION	WNL
T5	18.10.23	JCB TENDER ISSUE	WNL
T4	12.10.23	JCB TENDER ISSUE	WNL
T3	25.09.23	JCB TENDER ISSUE	WNL
T2	12.09.23	JCB TENDER ISSUE	WNL
T1	11.09.23	JCB TENDER ISSUE	WNL
Rev	Date	By	Description
Revisions			
Status			

CONSTRUCTION




Tier Consult Ltd
Richmond House
Sandpiper Court
Chester Business Park
Chester | CH4 9QZ
t: 01244 684900

Client
TRITAX SYMMETRY HUXTON LIMITED

Project
SYMMETRY PARK
CRONTON
PHASE 1 - UNIT 2 (NO BORROW PITS)
Title
Proposed Earthworks

Scale 1:500@A0	Drawn JCB	Checked WNL	Revision C5
Date Jan'21	TIER Project No: T_18_2126		
Drawing Ref		T_18_2126	

Tier No: T_18_2126-60-61 L005-TIE-ZZ-XX-DR-C-6051

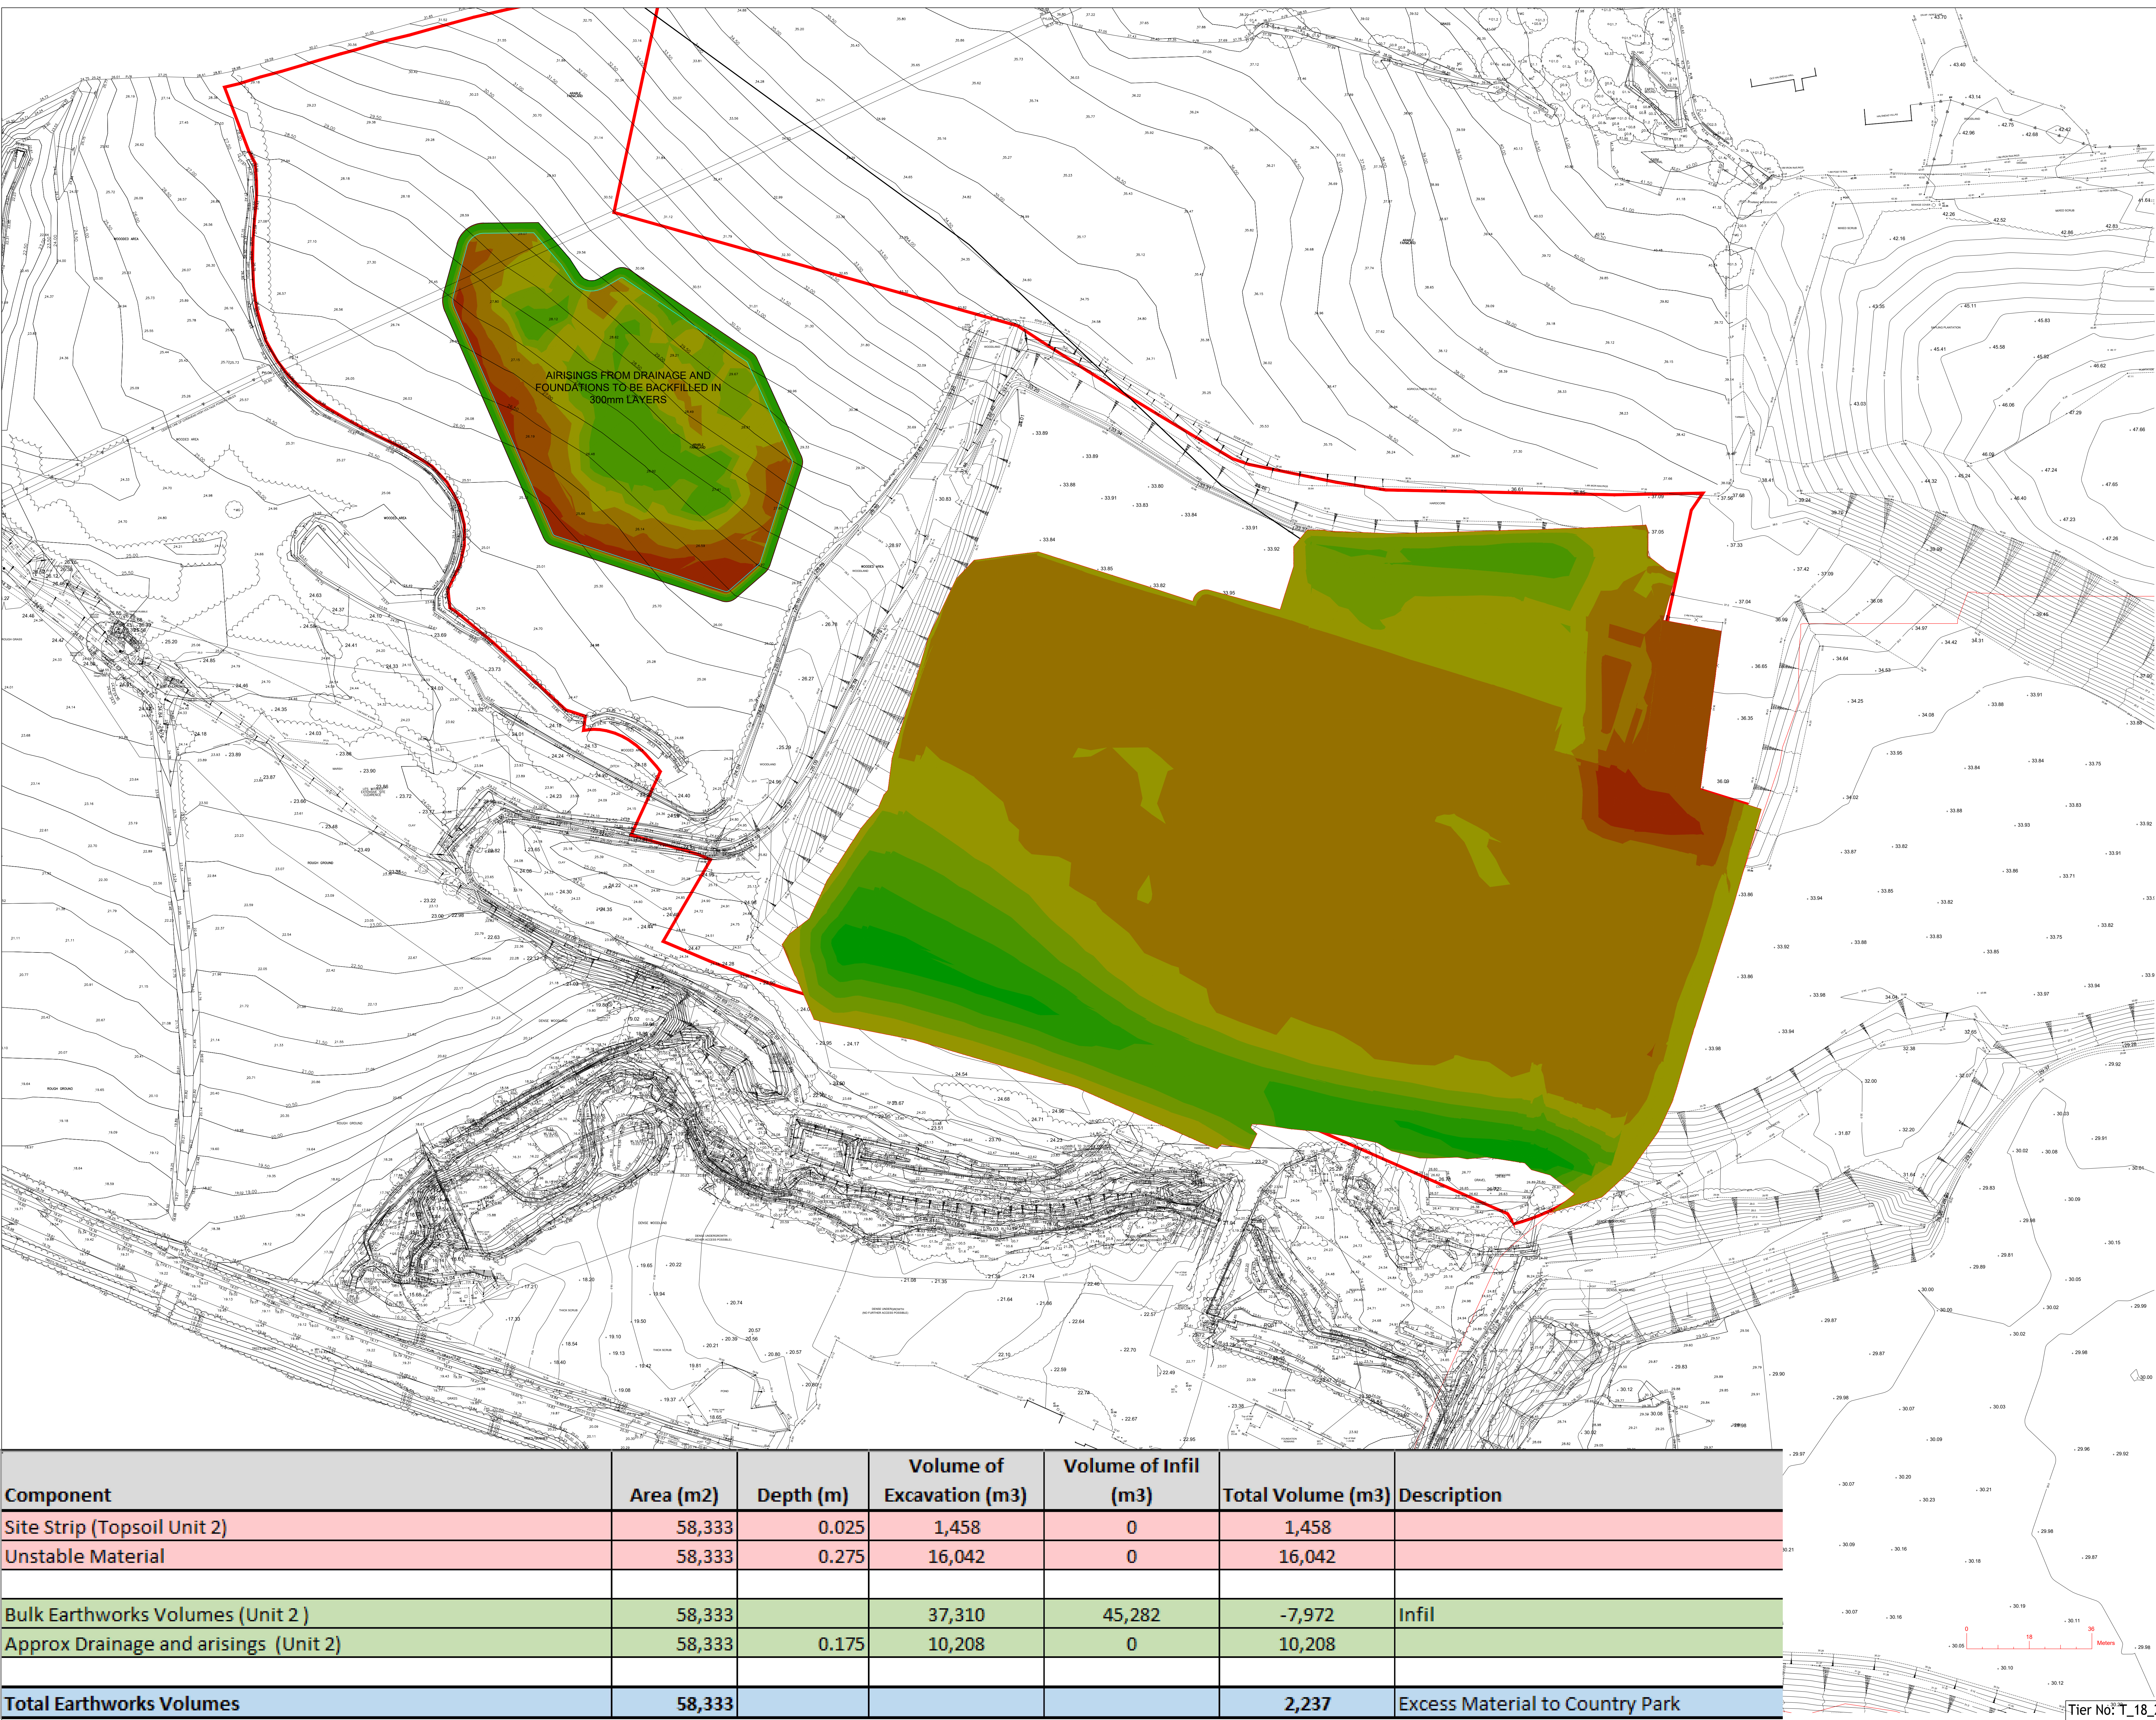

Component	Area (m2)	Depth (m)	Volume of Excavation (m3)	Volume of Infil (m3)	Total Volume (m3)	Description
Site Strip (Topsoil Unit 2)	58,333	0.025	1,458	0	1,458	
Unstable Material	58,333	0.275	16,042	0	16,042	
Bulk Earthworks Volumes (Unit 2)	58,333		37,310	45,282	-7,972	Infil
Approx Drainage and arisings (Unit 2)	58,333	0.175	10,208	0	10,208	
Total Earthworks Volumes	58,333				2,237	Excess Material to Country Park