




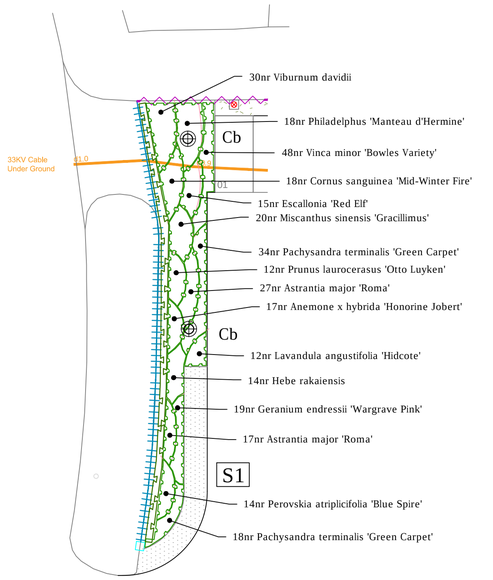


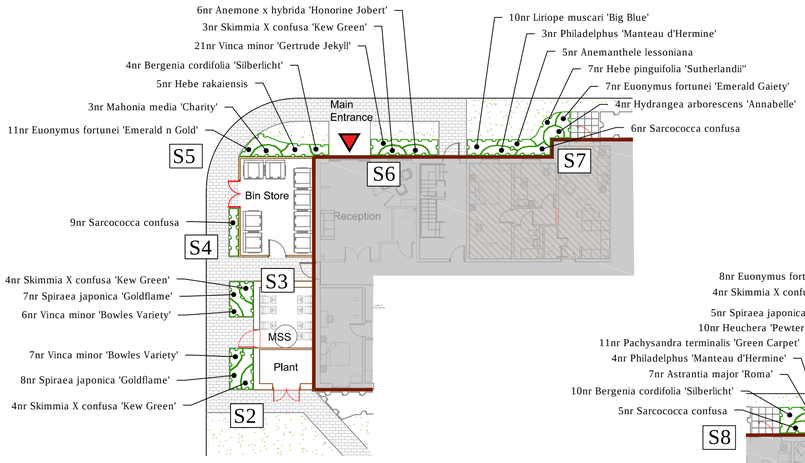


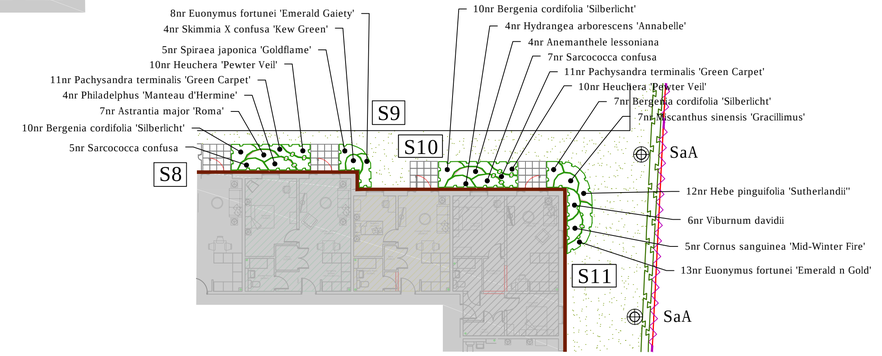

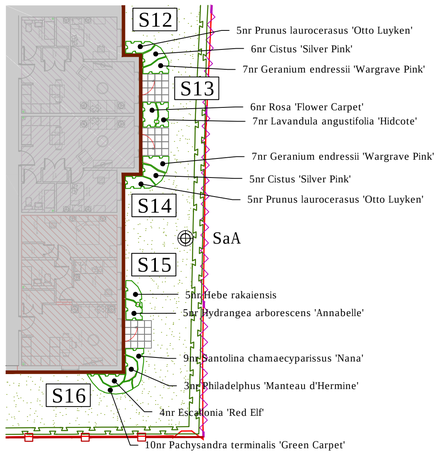

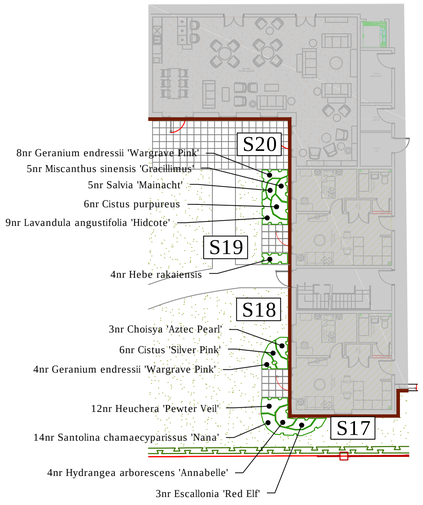

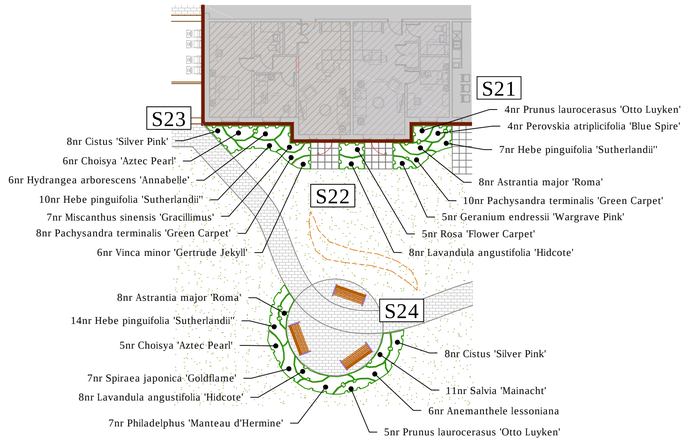

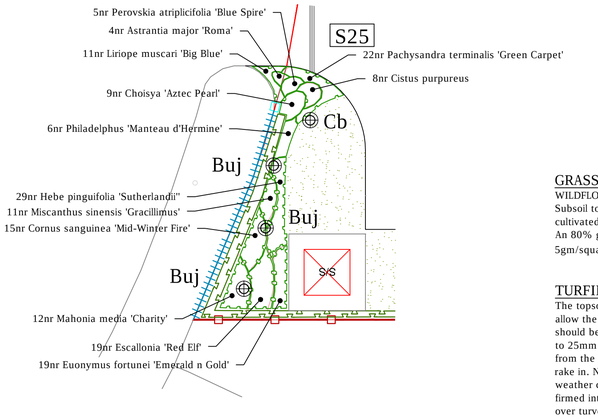

PLANTING SCHEDULES

SHRUB SCHEDULE

ORNAMENTAL PLANTING SCHEDULE				
Herbaceous				
Nr	Name	Ht in cm	Pot(L)	Density
15	Anemanthele lessoniana		3L	4.00
23	Anemone x hybrida 'Honorine Jobert'		3L	7.00
71	Astrantia major 'Roma'		3L	7.00
31	Bergenia cordifolia 'Silberlicht'		3L	6.00
50	Geranium endressii 'Wargrave Pink'		3L	6.00
32	Heuchera 'Pewter Veil'		3L	9.00
21	Liriope muscari 'Big Blue'		3L	7.00
50	Miscanthus sinensis 'Gracillimus'		3L	5.00
23	Perovskia atriplicifolia 'Blue Spire'		3L	5.00
16	Salvia 'Mainacht'		3L	7.00
Shrub				
Nr	Name	Ht in cm	Pot(L)	Density
23	Choisya 'Aztec Pearl'	30-40cm	3L	4.00
14	Cistus purpureus	30-40cm	3L	5.00
33	Cistus 'Silver Pink'	30-40cm	3L	5.00
38	Cornus sanguinea 'Mid-Winter Fire'	40-60cm	3L	4.00
41	Escallonia 'Red Elf'	50-60cm	3L	4.00
15	Euonymus fortunei 'Emerald Gaiety'	20-30cm(D)	3L	6.00
43	Euonymus fortunei 'Emerald n Gold'	20-30cm(D)	3L	6.00
79	Hebe pinguifolia 'Sutherlandii"	25-30cm	3L	6.00
28	Hebe rakaiensis	25-30cm	3L	4.00
23	Hydrangea arborescens 'Annabelle'	50-60cm	3L	4.00
44	Lavandula angustifolia 'Hidcote'	25-30cm	3L	6.00
15	Mahonia media 'Charity'	30-40cm	3L	3.00
124	Pachysandra terminalis 'Green Carpet'	20-30cm(D)	3L	6.00
41	Philadelphus 'Manteau d'Hermine'	30-40cm	3L	3.00
31	Prunus laurocerasus 'Otto Luyken'	50-60cm	3L	4.00
11	Rosa 'Flower Carpet'		3L	4.00
23	Santolina chamaecyparissus 'Nana'	25-30cm	3L	6.00
27	Sarcococca confusa	20-25cm	3L	5.00
15	Skimmia X confusa 'Kew Green'	30-40cm	3L	4.00
27	Spiraea japonica 'Goldflame'	30-40cm	3L	4.00
36	Viburnum davidii	25-30cm	3L	5.00
61	Vinca minor 'Bowles Variety'	15-20cm(D)	3L	9.00
27	Vinca minor 'Gertrude Jekyll'		3L	9.00

All shrub material shall be first quality, sturdy, well rooted non-refridgerated stock with well branched heads and fibrous root systems. Shrubs shall be planted into 450mm good quality fibrous topsoil incorporating organic compost and slow release fertiliser in accordance with all good horticultural practice.
All plant material shall be a minimum of 3L pot size unless otherwise specified and conform to BS3936 Part 1 and BS 4428. Finished beds shall be lightly forked over and dressed with 50mm coarse forest bark mulch.

TREE SCHEDULE

SPECIES		NUMBERS REQUIRED		
	Ht in m	2.5-2.75	2.7-3.0	3.5-4.0
	Girth in cm	6-8	10-12	12-14
Betula utilis var. jacquemontii (Buj)		-	-	3
Carpinus betulus (Cb)		-	-	3
Prunus padus 'Albertii' (PpA)		-	-	1
Sorbus aucuparia 'Asplenifolia' (SaA)		-	-	3

All trees to have clear stems to 1.8m above ground level with well developed branching heads with a single, central leader and healthy, fibrous root systems.
Trees shall be planted into pits of an appropriate size to accommodate the root system without restriction, backfilled with a 3:1 topsoil:compost mix and shall be secured to a machine rounded stake using 1 no. tree tie with rubber spacer. Finished height of stake shall not exceed 1/3 height of staked tree above ground.
Foundation design of new buildings shall accommodate proposed tree planting in accordance with NHBC guidelines.

BULB SCHEDULE

Nr.	Name	Size	Planting density
1855	Narcissi pseudonarcissus	12/14	35

Bulbs to be naturalised within the grass sward and planted in clumps of between 9-15; spreading them evenly throughout the designated planting area. Bulbs to be planted 2-3 times the depth of the bulb and at least twice the bulbs width apart.

GRASS SEEDING

WILDFLOWER MIX
Subsoil to be cultivated using a disc harrow or rotovator, to 30mm depth then further cultivated and rolled to produce a firm seed bed.
An 80% grasses:20% wildflower seed mix to be sown. Eg: British Seed Houses, WFG8 at 5gm/square metre.

TURFING

The topsoiled area to be turfed, is to be graded and cross-graded to even running falls, to allow the finished level of the turf to be 40mm above adjoining paved areas. The surface should be lightly and uniformly firmed by rolling or treading, and reduced to a fine tilth up to 25mm in depth. All rubbish, stones greater than 50mm diameter etc, shall be removed from the surface. Apply an even application of approved fertiliser at a rate of 70g/m and rake in. No turves shall be laid in exceptionally dry or frosty weather or in other unsuitable weather conditions. The turves shall be laid in a stretcher bond pattern, closely butted and firmed into position, to the correct levels. The turves should be laid off planks, working over turves previously laid. A dressing of finely sifted topsoil (complying with BS 3882) should be applied to the laid turf and brushed well into the joints. Water the turves to prevent drying out before establishment.

NATIVE SPECIES PLANTING

NATIVE HEDGE SCHEDULE					
Nr	Name	Height/cm	Age	Root	Pot/L
39	Acer campestre	60-80cm	1/1	B	
78	Corylus avellana	60-80cm	1/0	B	
315	Crataegus monogyna	60-80cm	1/1	B	
78	Ilex aquifolium	40-60cm		C	2L
158	Prunus spinosa	60-80cm	1/1	B	
39	Rosa canina	40-60cm		B	
78	Sambucus nigra	60-80cm	1/1	B	

All plant material shall conform to BS3936 Parts 1and 4 and BS 4428. Transplants to be planted into prepared ground, containing a minimum depth of 450mm depth topsoil complying with BS3882, 1994 and incorporating organic matter and slow release fertiliser. Organic matter to be proprietary shrub planting compost, or approved compost derived from recycled organic matter. Slow release fertiliser to be 'Enmag' or similar.

Rev.A: Paved surface updated (SF) February 2024

Sue Farmer BA MALD MLI
Landscape Architect

fdalandscape

Westleigh Hall
Wakefield Road
Denby Dale
Huddersfield HD8 8QJ
telephone 01484 861611
fax 01484 861616
isdn 01484 866900
email info@fdalandscape.co.uk
www.fdalandscape.co.uk

client: McCarthy Stone

project: Proposed Residential Development

ST CHADS DRIVE,
KIRKBY

drawing title: PLANTING DETAILS

scale	date	drwn by	drawing no
1:200 @A1	Feb 23	CS	R/2714/2A