PLANNING DRAWING
THIS DRAWING IS FOR PLANNING PURPOSES ONLY AND NOT TO BE USED FOR CONSTRUCTION

Roof Front & Rear Slopes
Remove existing roof covering.
Install new traditional slates, to match adjacent property No. 10 Church Street. Slates to match in size, colour and texture.

Chimney
Reinstate truncated chimney, reinstall chimney pots, pointing (lime mortar), new lead flashing

Existing gutters, downpipes and fascia to be removed. New painted timber fascia installed. New cast iron ogee gutters installed. Paint finish - black.

New down pipe & hopper
Install new cast iron down pipe & hopper. Paint finish - black.

Front elevation
Paint to be removed from stone heads / cills / by specialist approved removal method (doff / washab, etc).
Spalled / damaged sandstone heads & cills to be refaced / repaired.

Re-point elevation in lime mortar.
Damaged existing bricks to be cut out and replaced with new bricks to match existing.

All redundant alarm boxes, cables, clips, pipes to be removed. Any retained cables to be neatly clipped.

Anti roost wire to be installed to shop front and all window cills

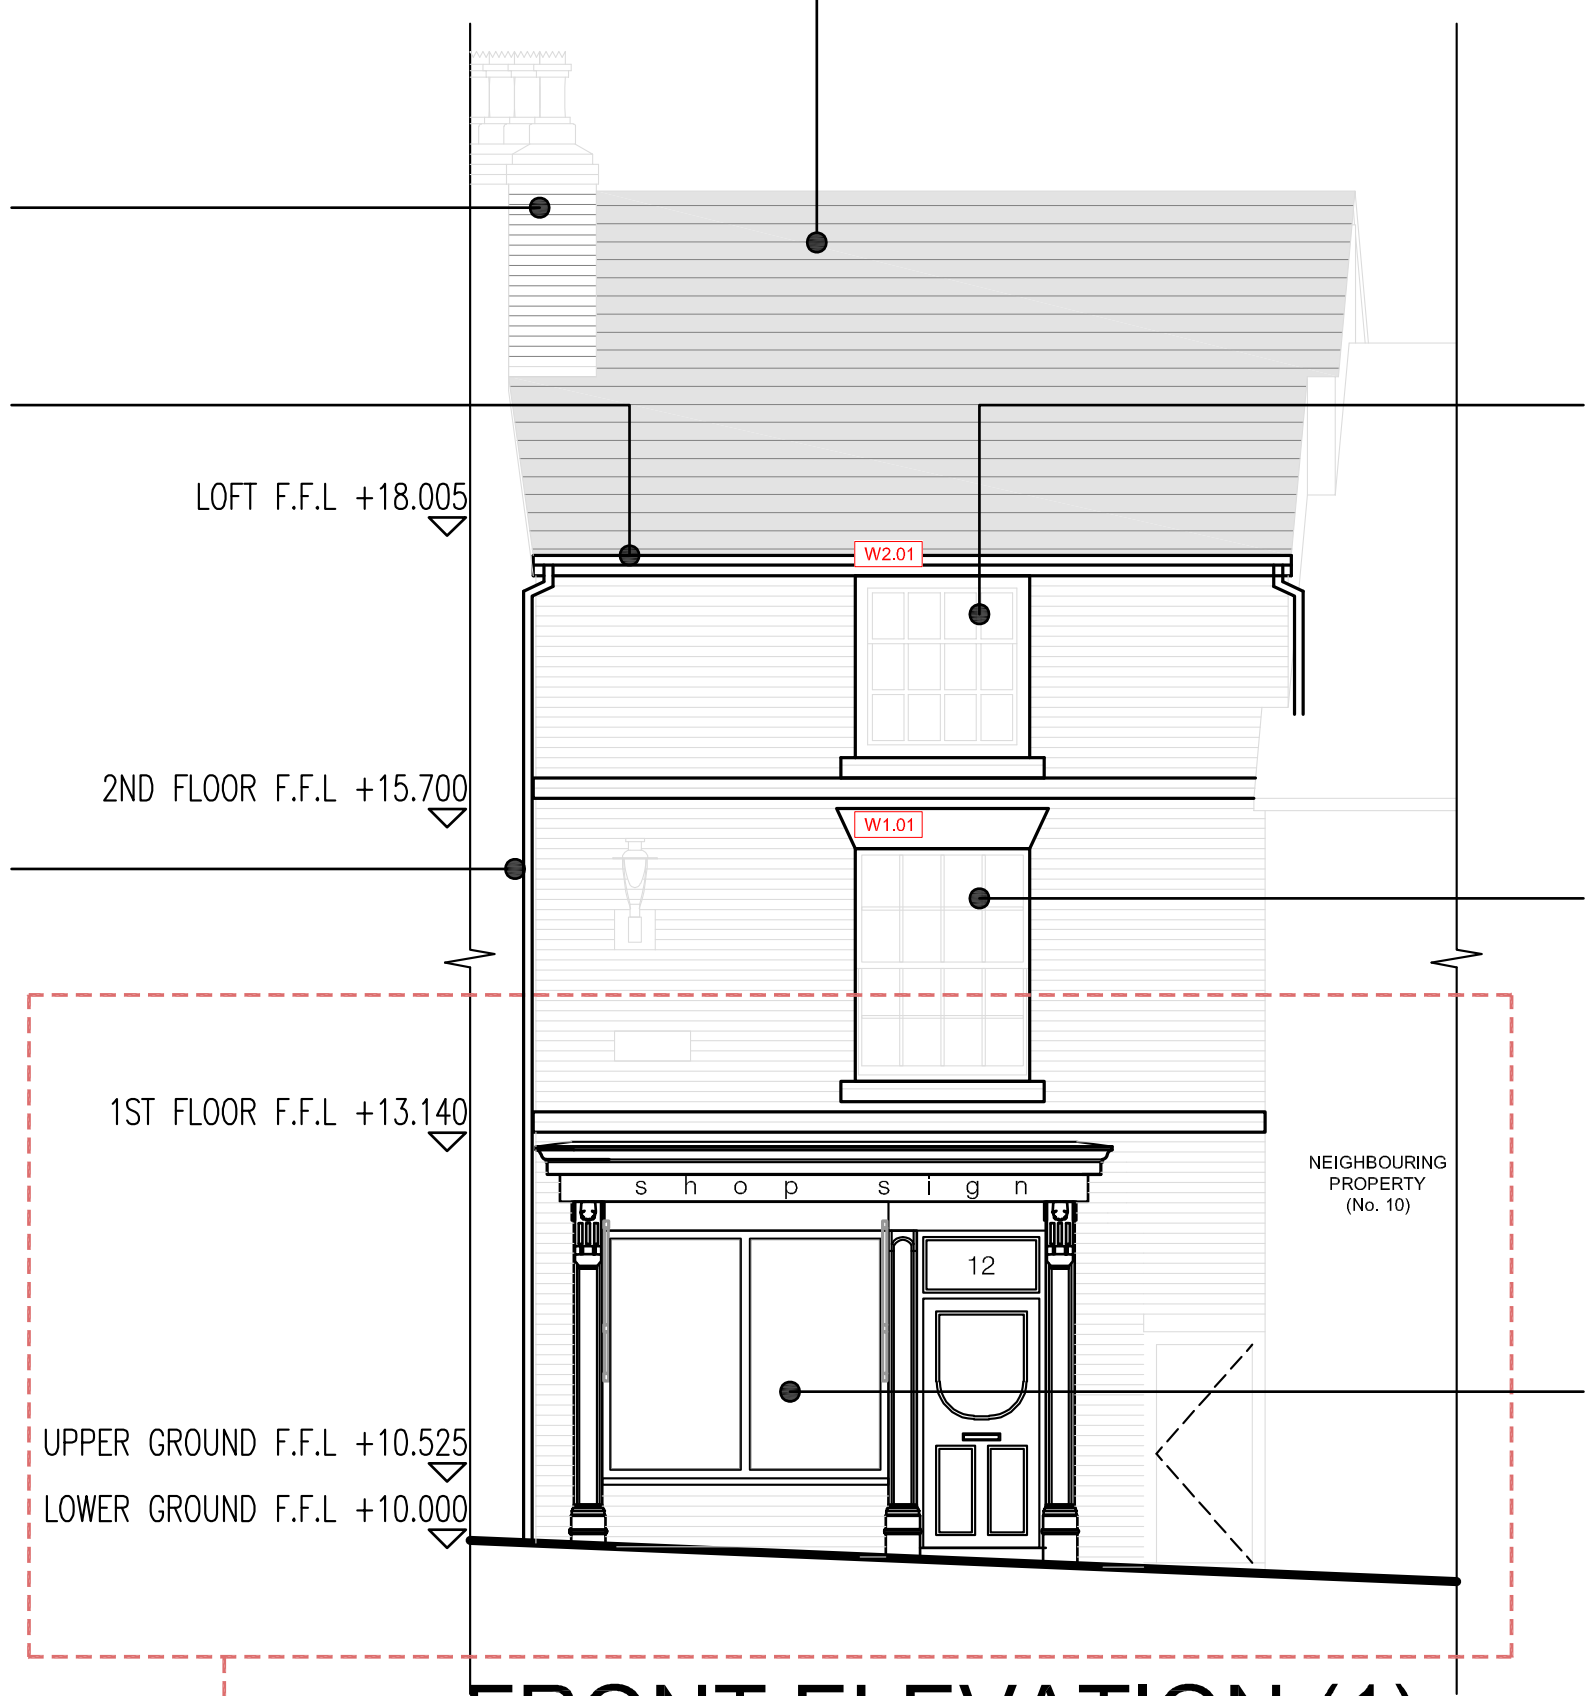

W2.01
Existing sliding sash window to be fully refubished, repainted white.

W1.01
Existing window to be removed and new traditional single glazed sliding sash window installed.

New shop front
Existing shop front to be removed. New shop front installed - see detail. New lead flashing to top of shop front.

FRONT ELEVATION (1)
- SOUTH

W1.04
Existing window to be removed and new traditional single glazed fixed window installed.

Roof outrigger
Carefully lift existing roof slates and relay. Any new slates required to be reclaimed and to match in size,colour, texture.
Allow for new lead flashings

Existing gutters, downpipes and fascia to be removed. New painted timber fascia installed. New cast iron ogee gutters installed. Paint finish - black.

Remove existing render. New lime render to be installed with silicate paint finish, 'Keim Granita", colour TBC.

W1.05
Existing window to be removed and new traditional single glazed sliding sash window installed.

Existing parapet wall to be increased in height by 6 No. brick courses. Existing copings removed and reinstated.

Existing ventilation duct work to be removed, walls made good.
New ductwork to be installed taken through roof vertically and up outrigger wall.

Re-point brickwork to side elevation in lime mortar.
Damaged existing bricks to be cut out and replaced with new bricks to match existing.

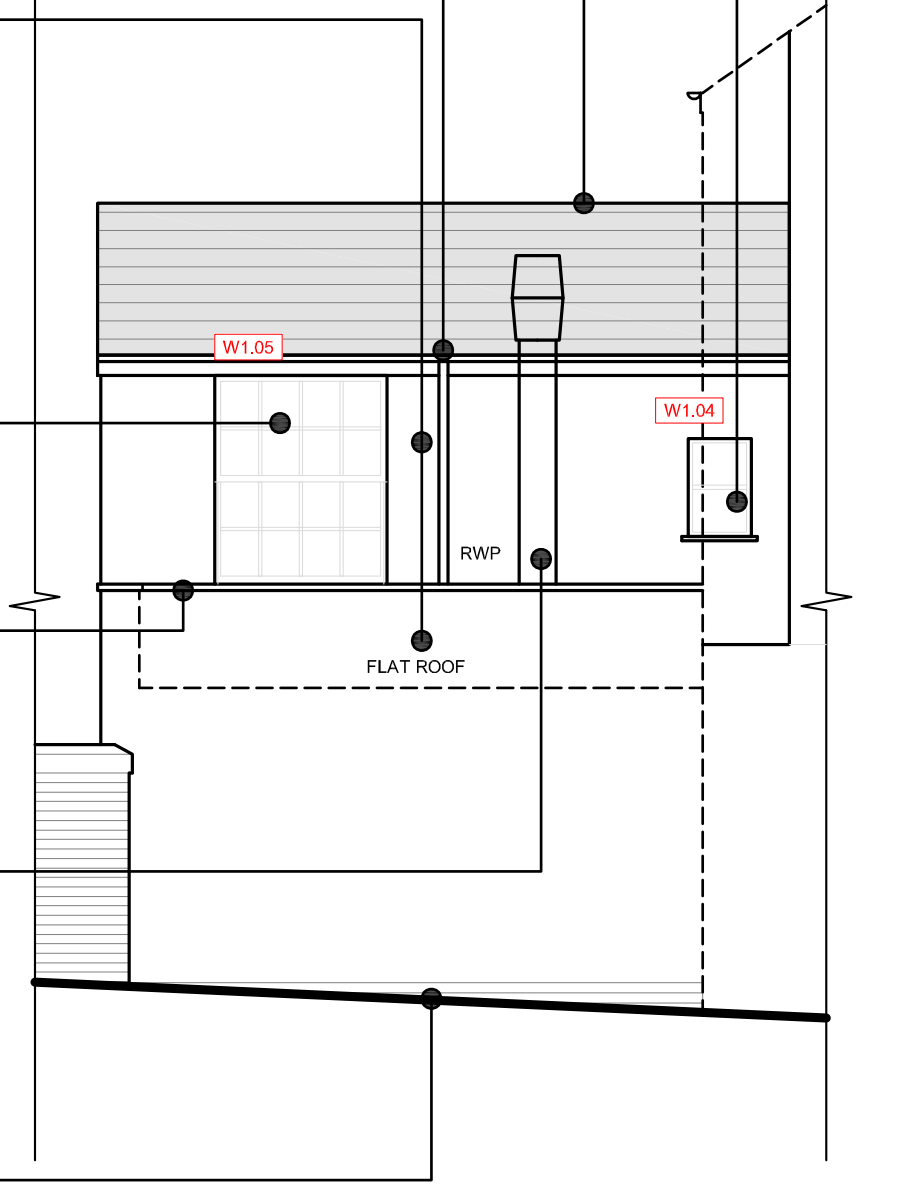

SIDE ELEVATION (3)
- WEST

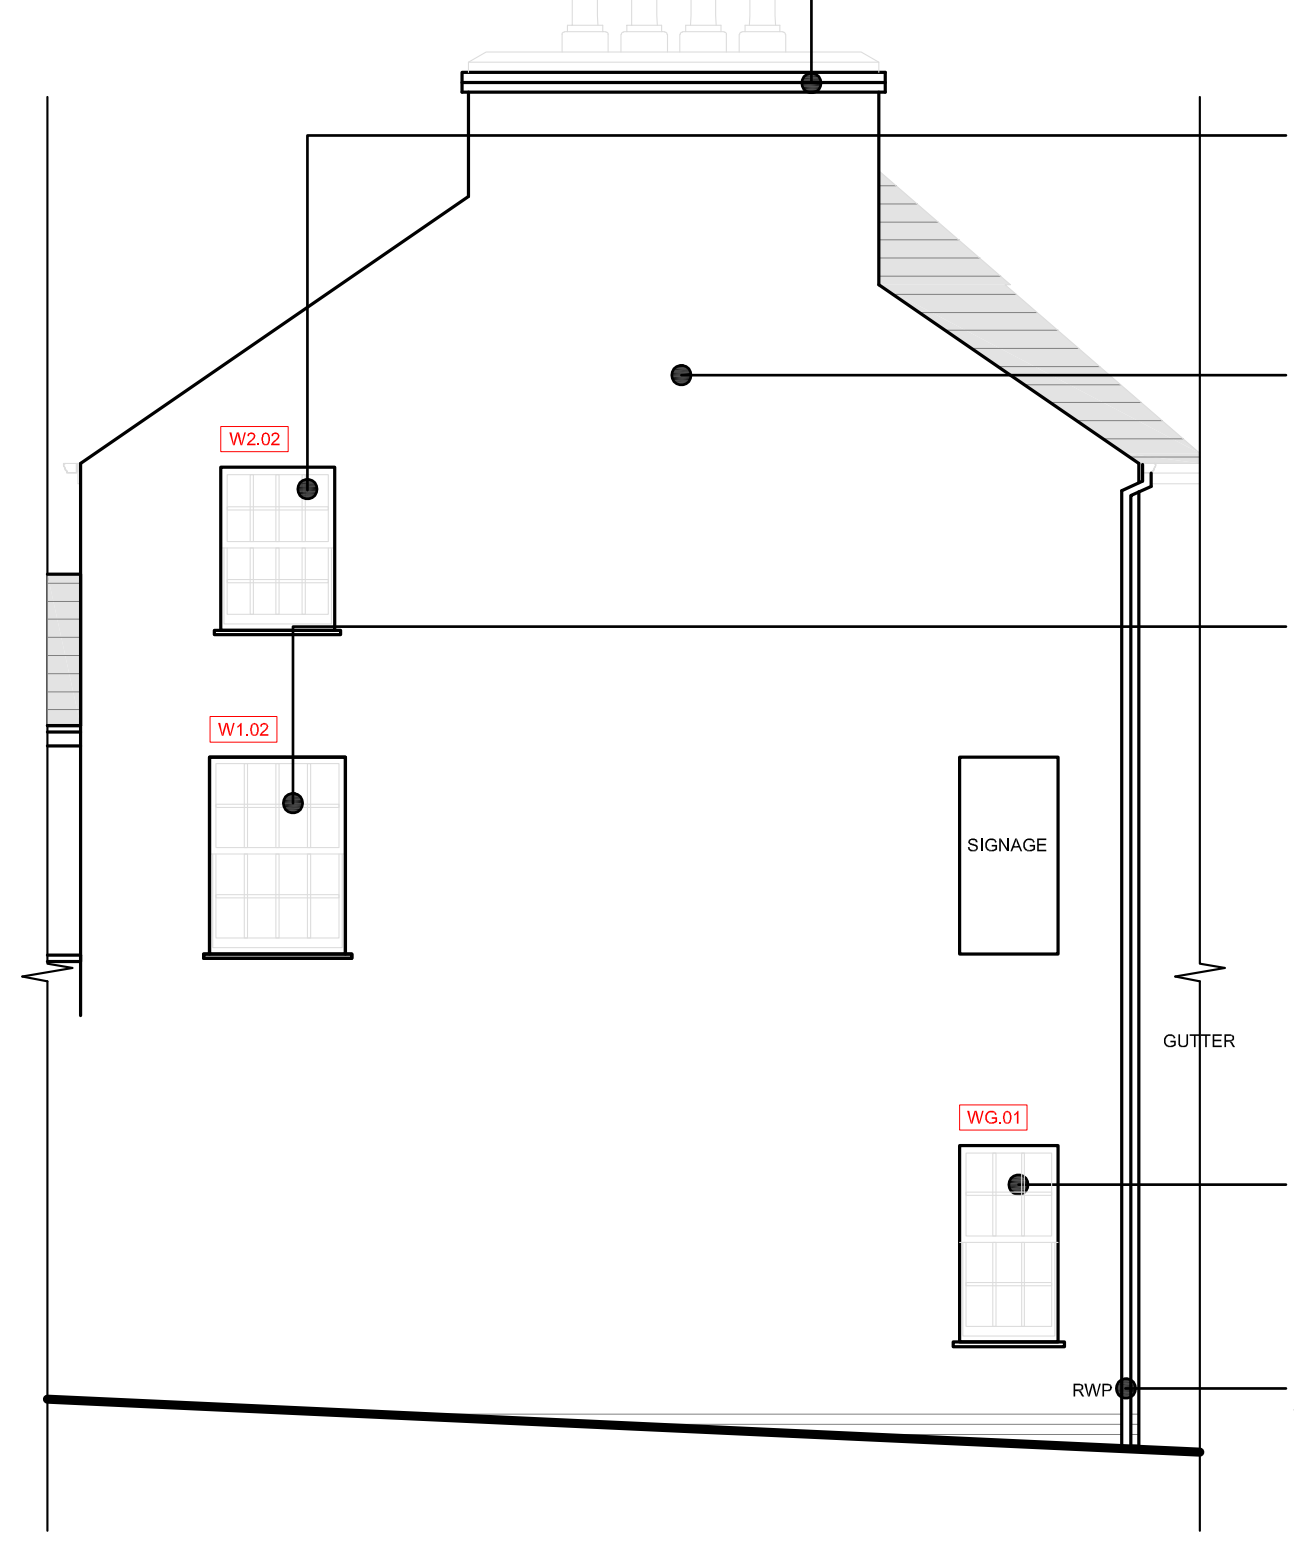

SIDE ELEVATION (2)
- WEST

Chimney
Reinstate truncated chimney, reinstall chimney pots, pointing (lime mortar), new lead flashing.

W2.02
Existing window to be removed and new traditional single glazed sliding sash window installed

Remove existing render. New lime render to be installed with silicate paint finish, 'Keim Granita", colour TBC.

W1.02
New window opening to be formed in gable wall. New traditional single glazed sliding sash window installed.

WG.01
Existing opening to be reinstated and new traditional single glazed sliding sash window to be installed.

New down pipe & hopper
Install new cast iron down pipe & hopper. Paint finish - black.

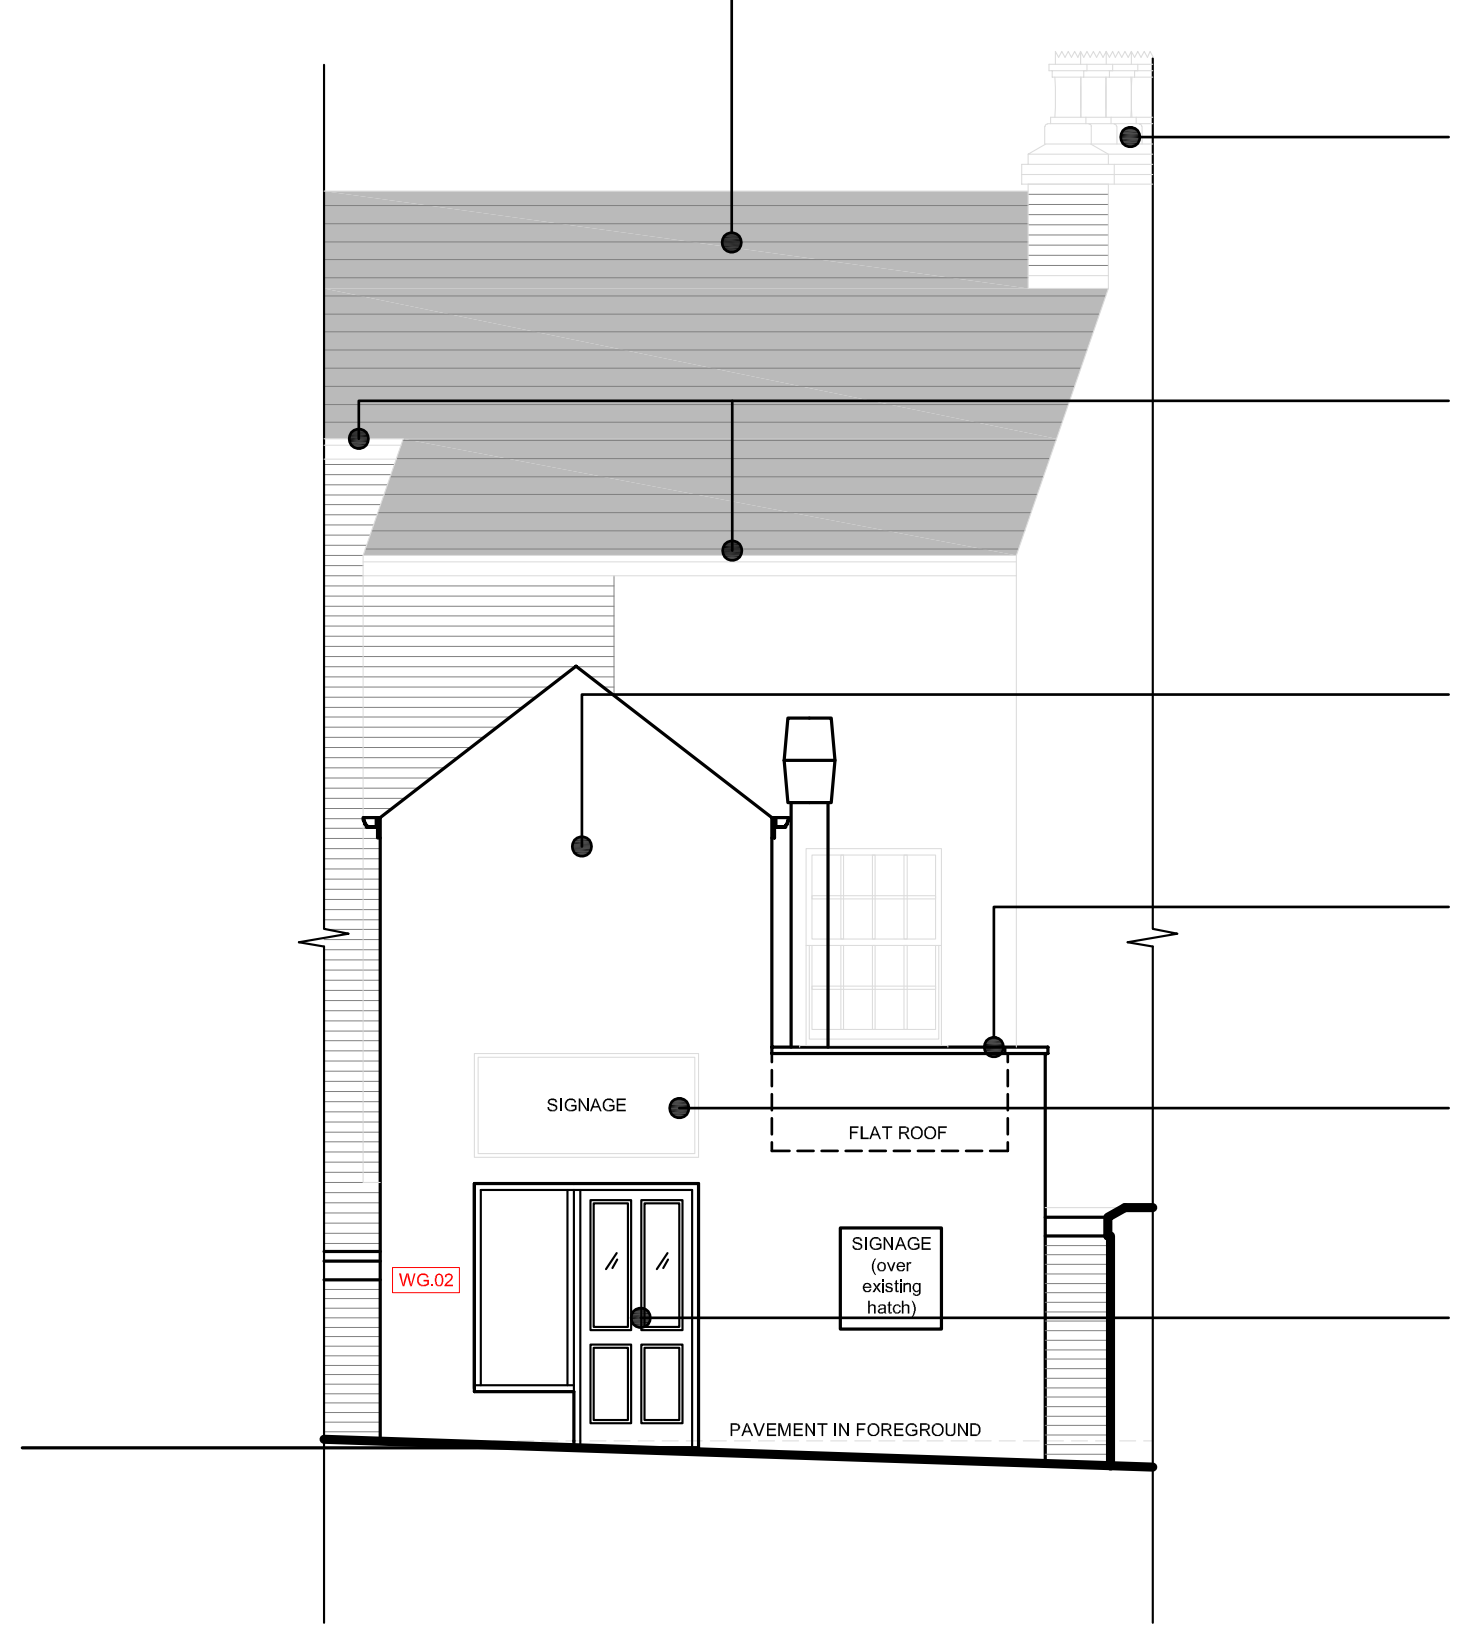

REAR ELEVATION (4)
- NORTH

Roof Front & Rear Slopes
Remove existing roof covering.
Install new traditional slates, to match adjacent property No. 10 Church Street. Slates to match in size, colour and texture.

Chimney
Reinstate truncated chimney, reinstall chimney pots, pointing (lime mortar), new lead flashing.

Existing gutters, downpipes and fascia to be removed. New painted timber fascia installed. New cast iron ogee gutters installed. Paint finish - black.

Remove existing render. New lime render to be installed with silicate paint finish, 'Keim Granita", colour TBC.

Existing parapet wall to be increased in height by 6 No. brick courses. Existing copings removed and reinstated.

Existing signage / board to be removed and replaced with new signage (drawn indicatively). Signage TBC by client.

Existing window to be removed and new opening formed. New painted timber door and side light to be installed to form entrance.
Door to be 4 panel with top panels glazed. Side line to be fixed 12mm laminated glass. Internal retractable/ de-mountable security grills/screen

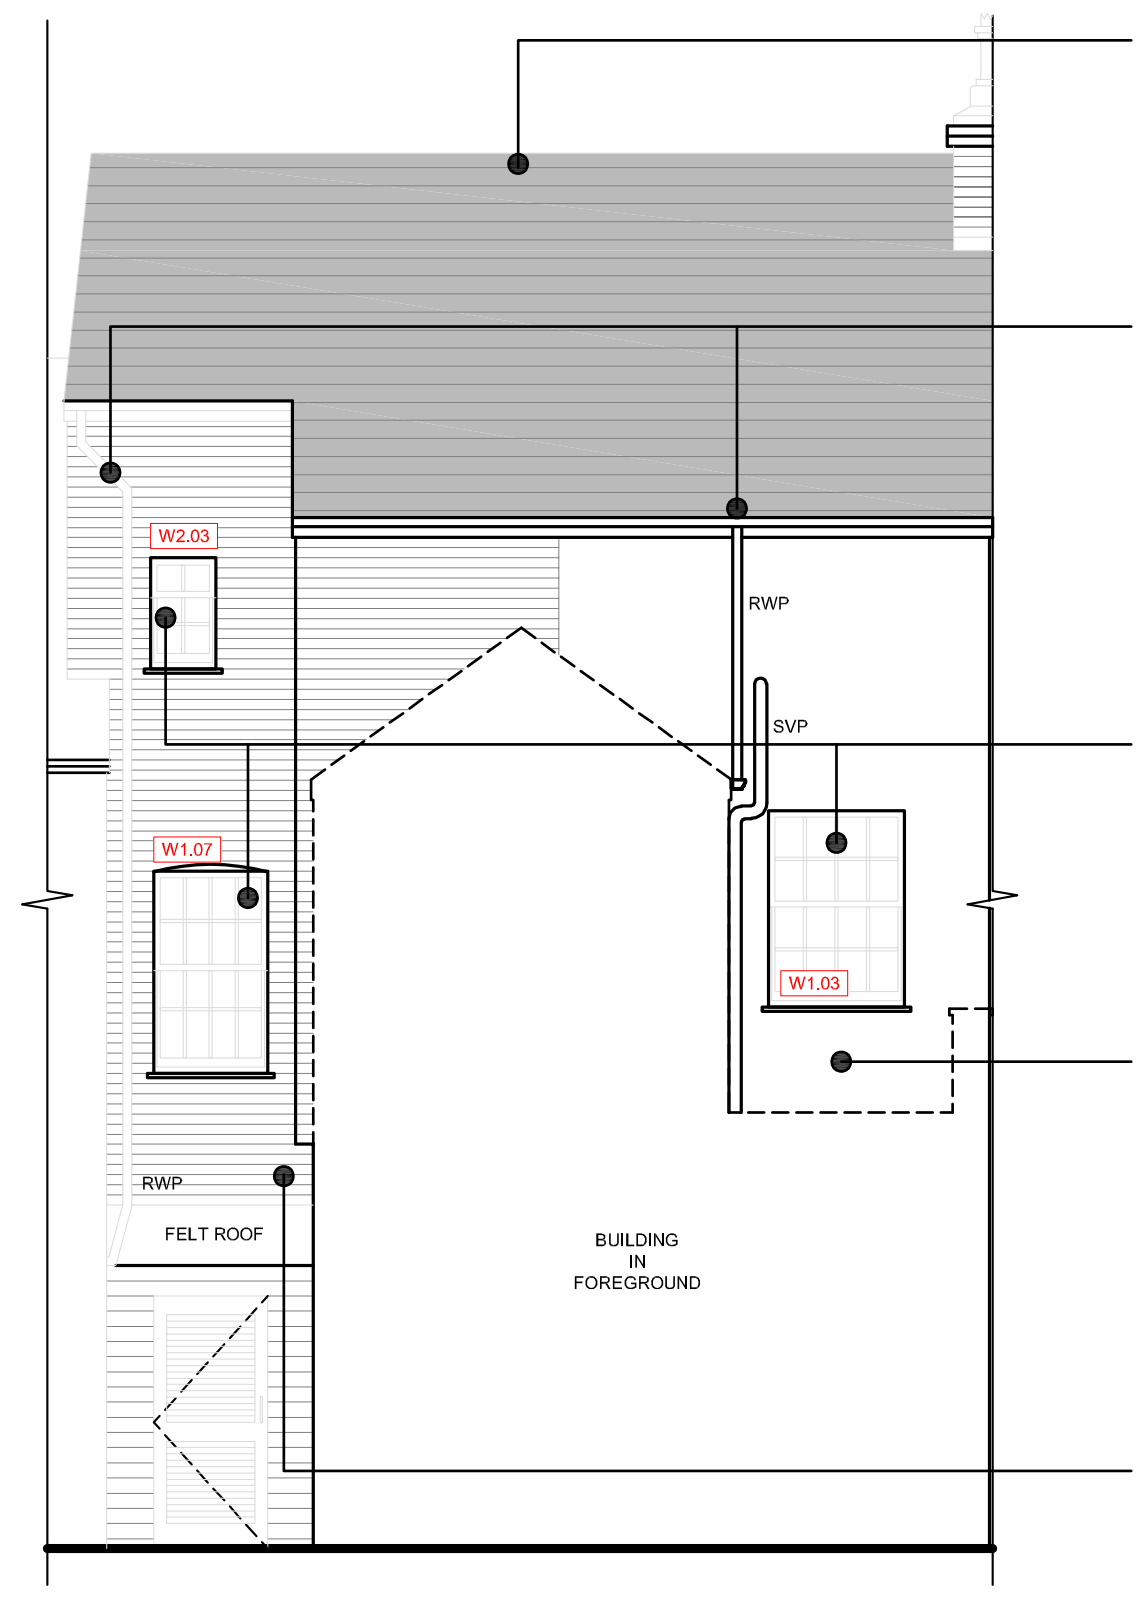

Roof Front & Rear Slopes
Remove existing roof covering
Install new slates, to match adjacent property No. 10 church street. Slates to match in size, colour, texture

Existing gutters, downpipes and fascia to be removed. New painted timber fascia installed. New cast iron ogee gutters installed. Paint finish - black. Install new cast iron downpipes. Paint finish - black.

W1.03, W1.07 & W2.03
Existing windows to be removed and new traditional single glazed sliding sash window installed

Remove existing render. New lime render to be installed with silicate paint finish, 'Keim Granita", colour TBC.

Re-point elevation in lime mortar.
Damaged existing bricks to be cut out and replaced with new bricks to match existing.

REAR ELEVATION (5)
- NORTH

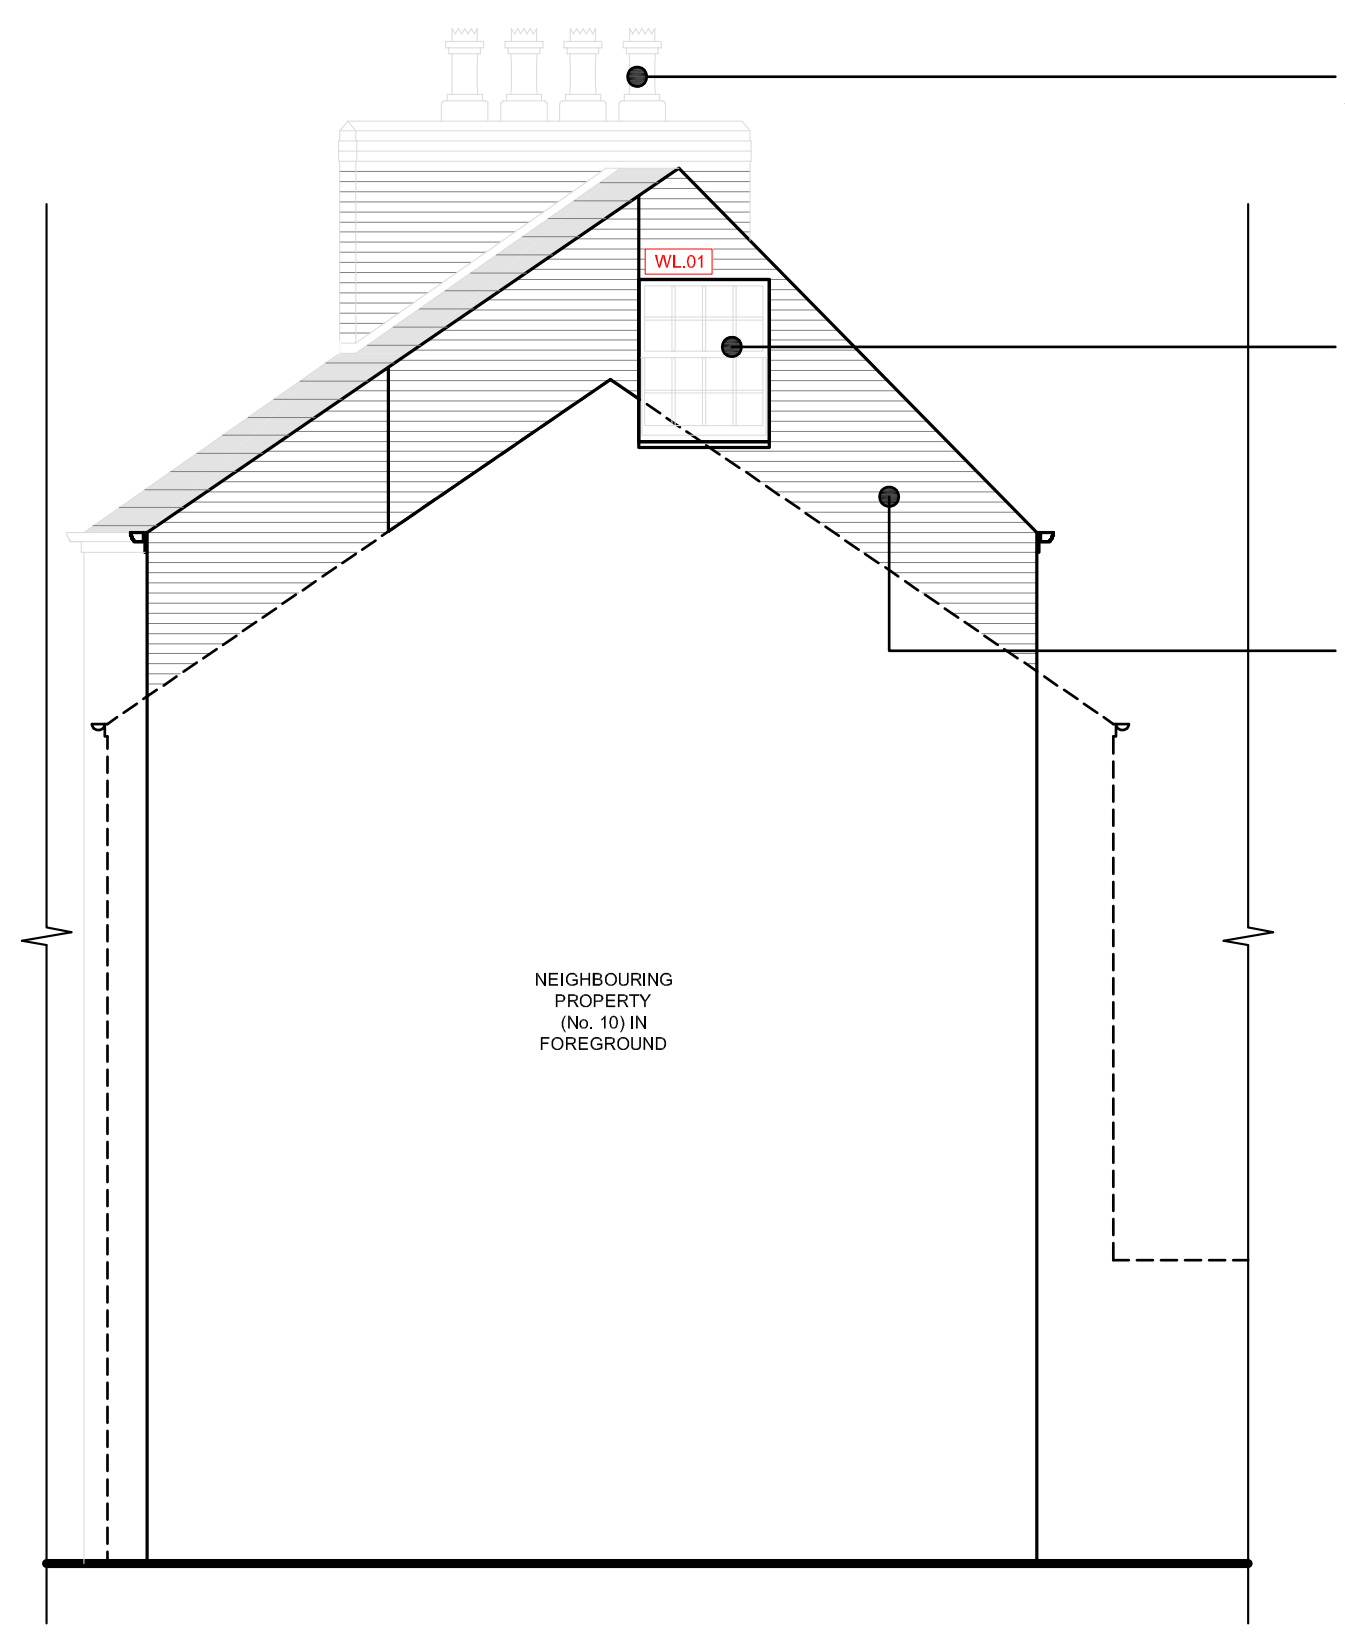

Chimney
Reinstate truncated chimney, reinstall chimney pots, pointing (lime mortar), new lead flashing.

WL.01
Existing window to be removed and new traditional single glazed sliding sash window installed.

Re-point elevation in lime mortar.
Damaged existing bricks to be cut out and replaced with new bricks to match existing.

SIDE ELEVATION (7)
- EAST

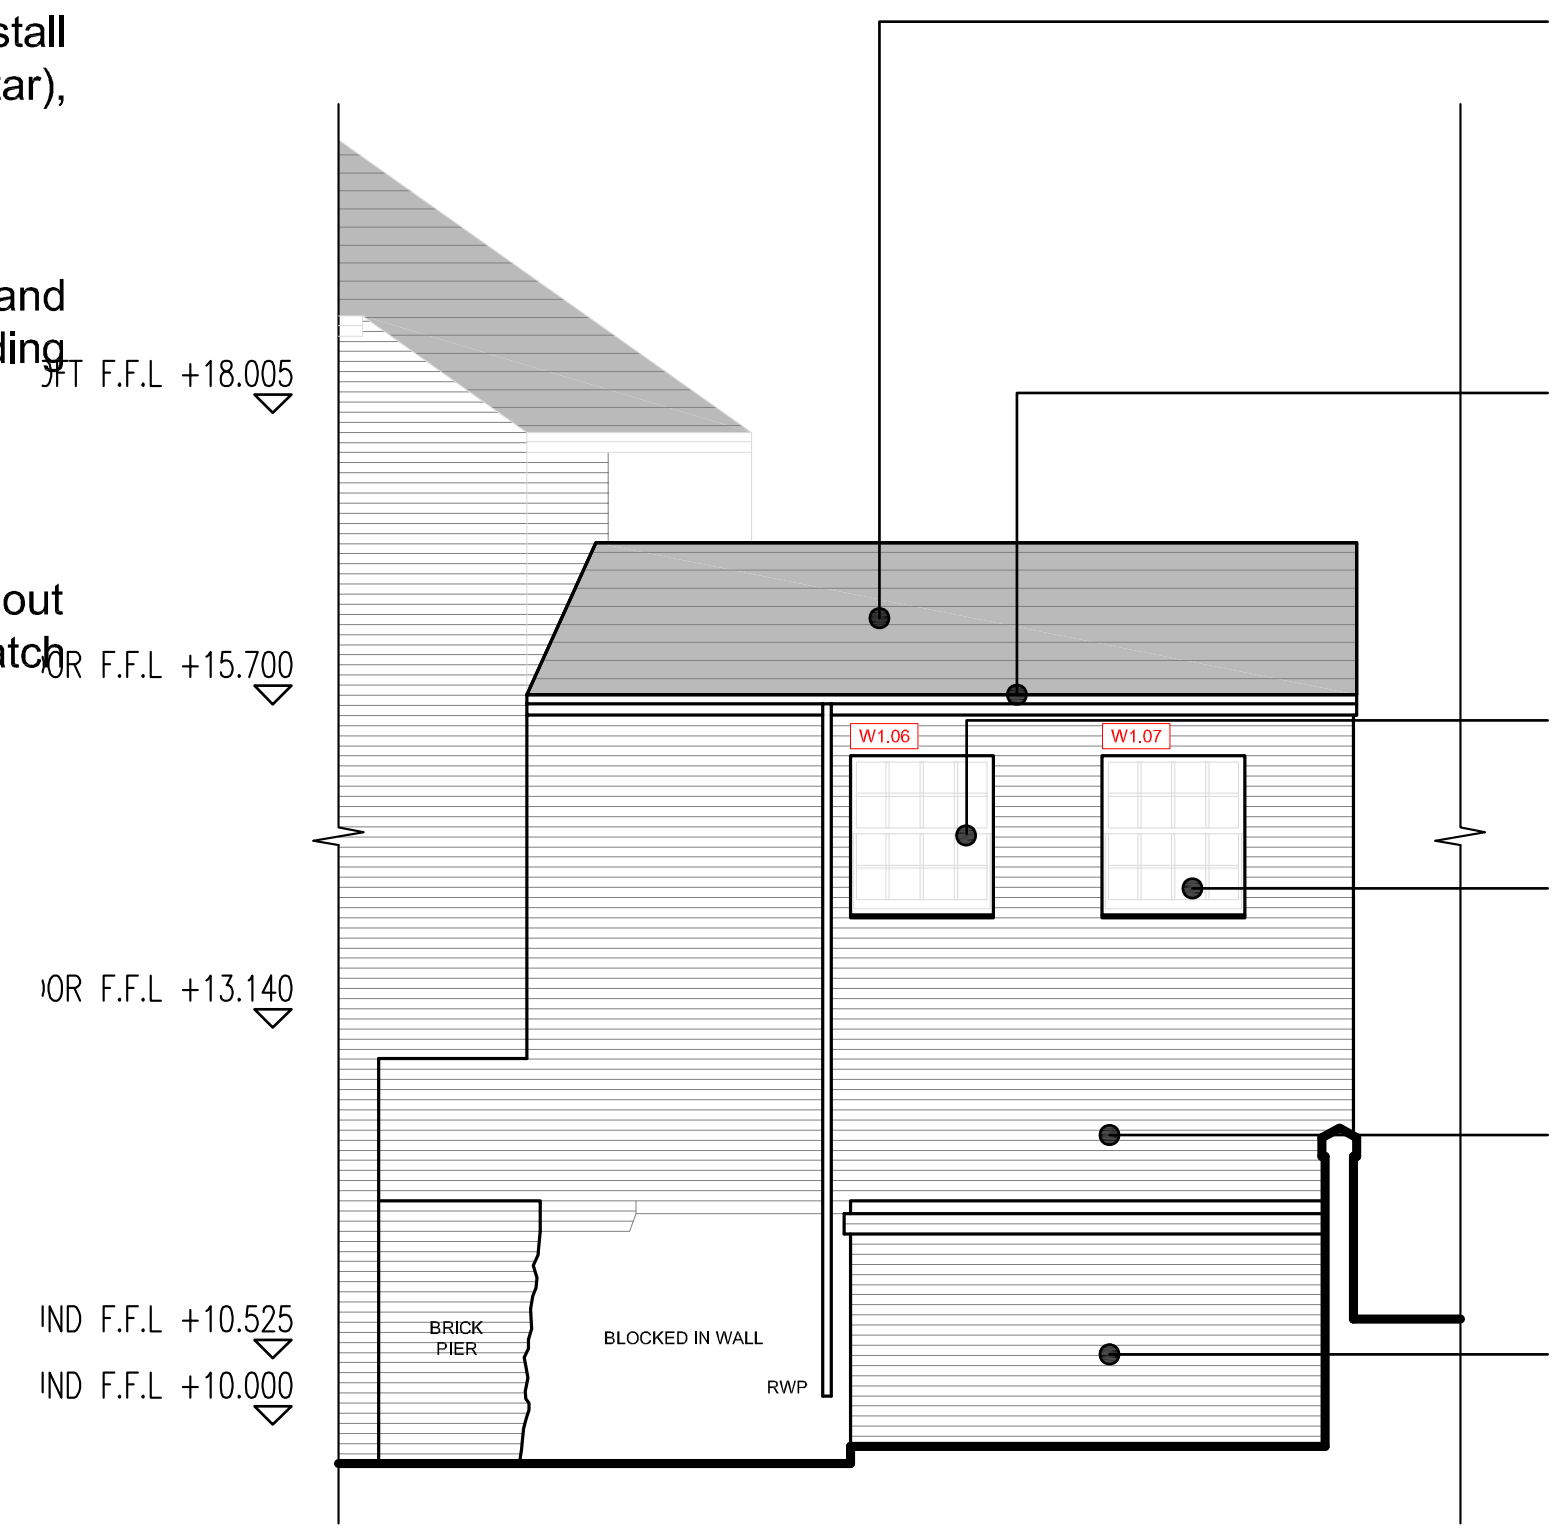

Roof outrigger
Carefully lift existing roof slates and relay. Any new slates required to be reclaimed and to match in size,colour, texture.
Allow for new lead flashings

Existing gutters, downpipes and fascia to be removed. New painted timber fascia installed. New cast iron ogee gutters installed. Paint finish - black.

W1.06
Existing window to be removed and new traditional single glazed sliding sash window installed

W1.07
Form new opening with lintel to S.Eng design. Supply and install new traditional single glazed sliding sash window.

Re-point elevation in lime mortar.
Damaged existing bricks to be cut out and replaced with new bricks to match existing.

Remove paint and re-point existing retaining wall. Infill pocket bricks.

SIDE ELEVATION (6)
- EAST

NORTH

0 2m 4m 6m 8m 10m
1:100

REVISIONS

Rev.	Description	Date	By	Chk'd
A	Updated in line with Planning department comments.	28-03-22	TOC	AW

Cass associates
architecture
masterplanning
planning
landscape
conservation
Studio 204B The Tea Factory
82 Wood Street
Liverpool L1 4DQ
T - +44 (0)151 707 0110
E - all@cassassociates.co.uk
W-www.cassassociates.co.uk

purpose **PLANNING**

drawing title
ELEVATIONS AS PROPOSED

client
KAIWEN TIAN & YIHAN GUO
project
12 CHURCH STREET, PRESCOT, L34 3LA

scale @ A1 1:100
date 11.02.2022
drn JT chk'd RR

1621-004
A

Original paper size (A1) 841x 594mm

CAD FILE NAME: S:\JOB FILES 1400 ONWARDS\1621 12 Church St, Prescot\Drawings (DMS to be used)\AutoCad\Current\1621_ALL PLANNING_23.02.22.dwg

© This drawing is the property of Cass Associates and the information can only be reproduced with their prior permission