


Client RLB	
Project CO OP FUNERAL CARE - PRESCOT	
Title GARDEN WALL FOUNDATION	
Office LIVERPOOL	Discipline CIVIL

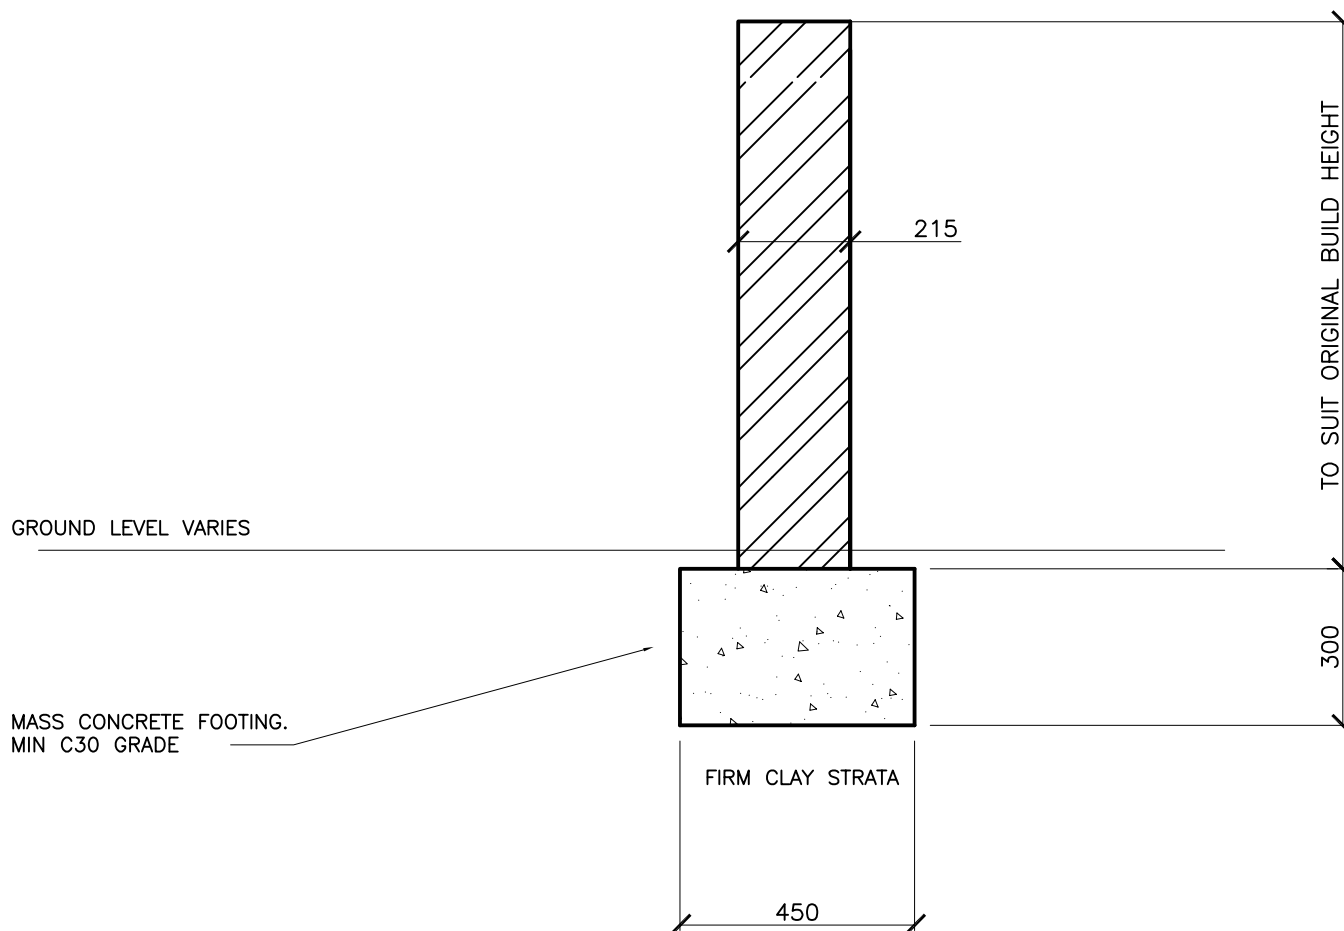

TYPICAL SECTION THOUGH GARDEN WALL REBUILD

FOOTING TO BEAR ON STRATA HAVING MIN. CAPACITY OF 50 kN/m. sq. (FIRM CLAY)

MORTAR TO BE 1:1/4:3 CEMENT:LIME:SAND.

BRICKS GENERALLY TO MATCH ORIGINAL BUILD

MINIMUM DENSITY OF BRICKS TO BE 2000 kg/m. cu.

CEMENT TO BE SULPHATE RESISTING.

WALL TO BE CONSTRUCTED AS A SOLID BRICK WALL USING AN APPROPRIATE BRICK BOND.

WALL TIED TO EXISTING BUILDING AND GARDEN WALLS AT BOTH ENDS

1	9/21	DESCRIPTION	CY	JA	CY	Drawn	Date	COPYRIGHT: THE COPYRIGHT OF THIS DRAWING IS VESTED IN CLANCY CONSULTING. IT SHALL NOT BE USED WITHOUT PERMISSION BY ANYONE FOR ANY PURPOSE. DO NOT SCALE THIS DRAWING ELECTRONICALLY OR MANUALLY. WORK TO FIGURED DIMENSIONS ONLY. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS STATED OTHERWISE. DO NOT TURN ON LAYERS THAT HAVE BEEN TURNED OFF. DO NOT THAW LAYERS THAT HAVE BEEN FROZEN.	Job number	Drawing number	Revision
						Checked	Scale @ A4				
						Approved	Status				
						CY	CONSTRUCTION				
Rev	Date	Description	By	Check	App.				4-8221	sk 01	1