
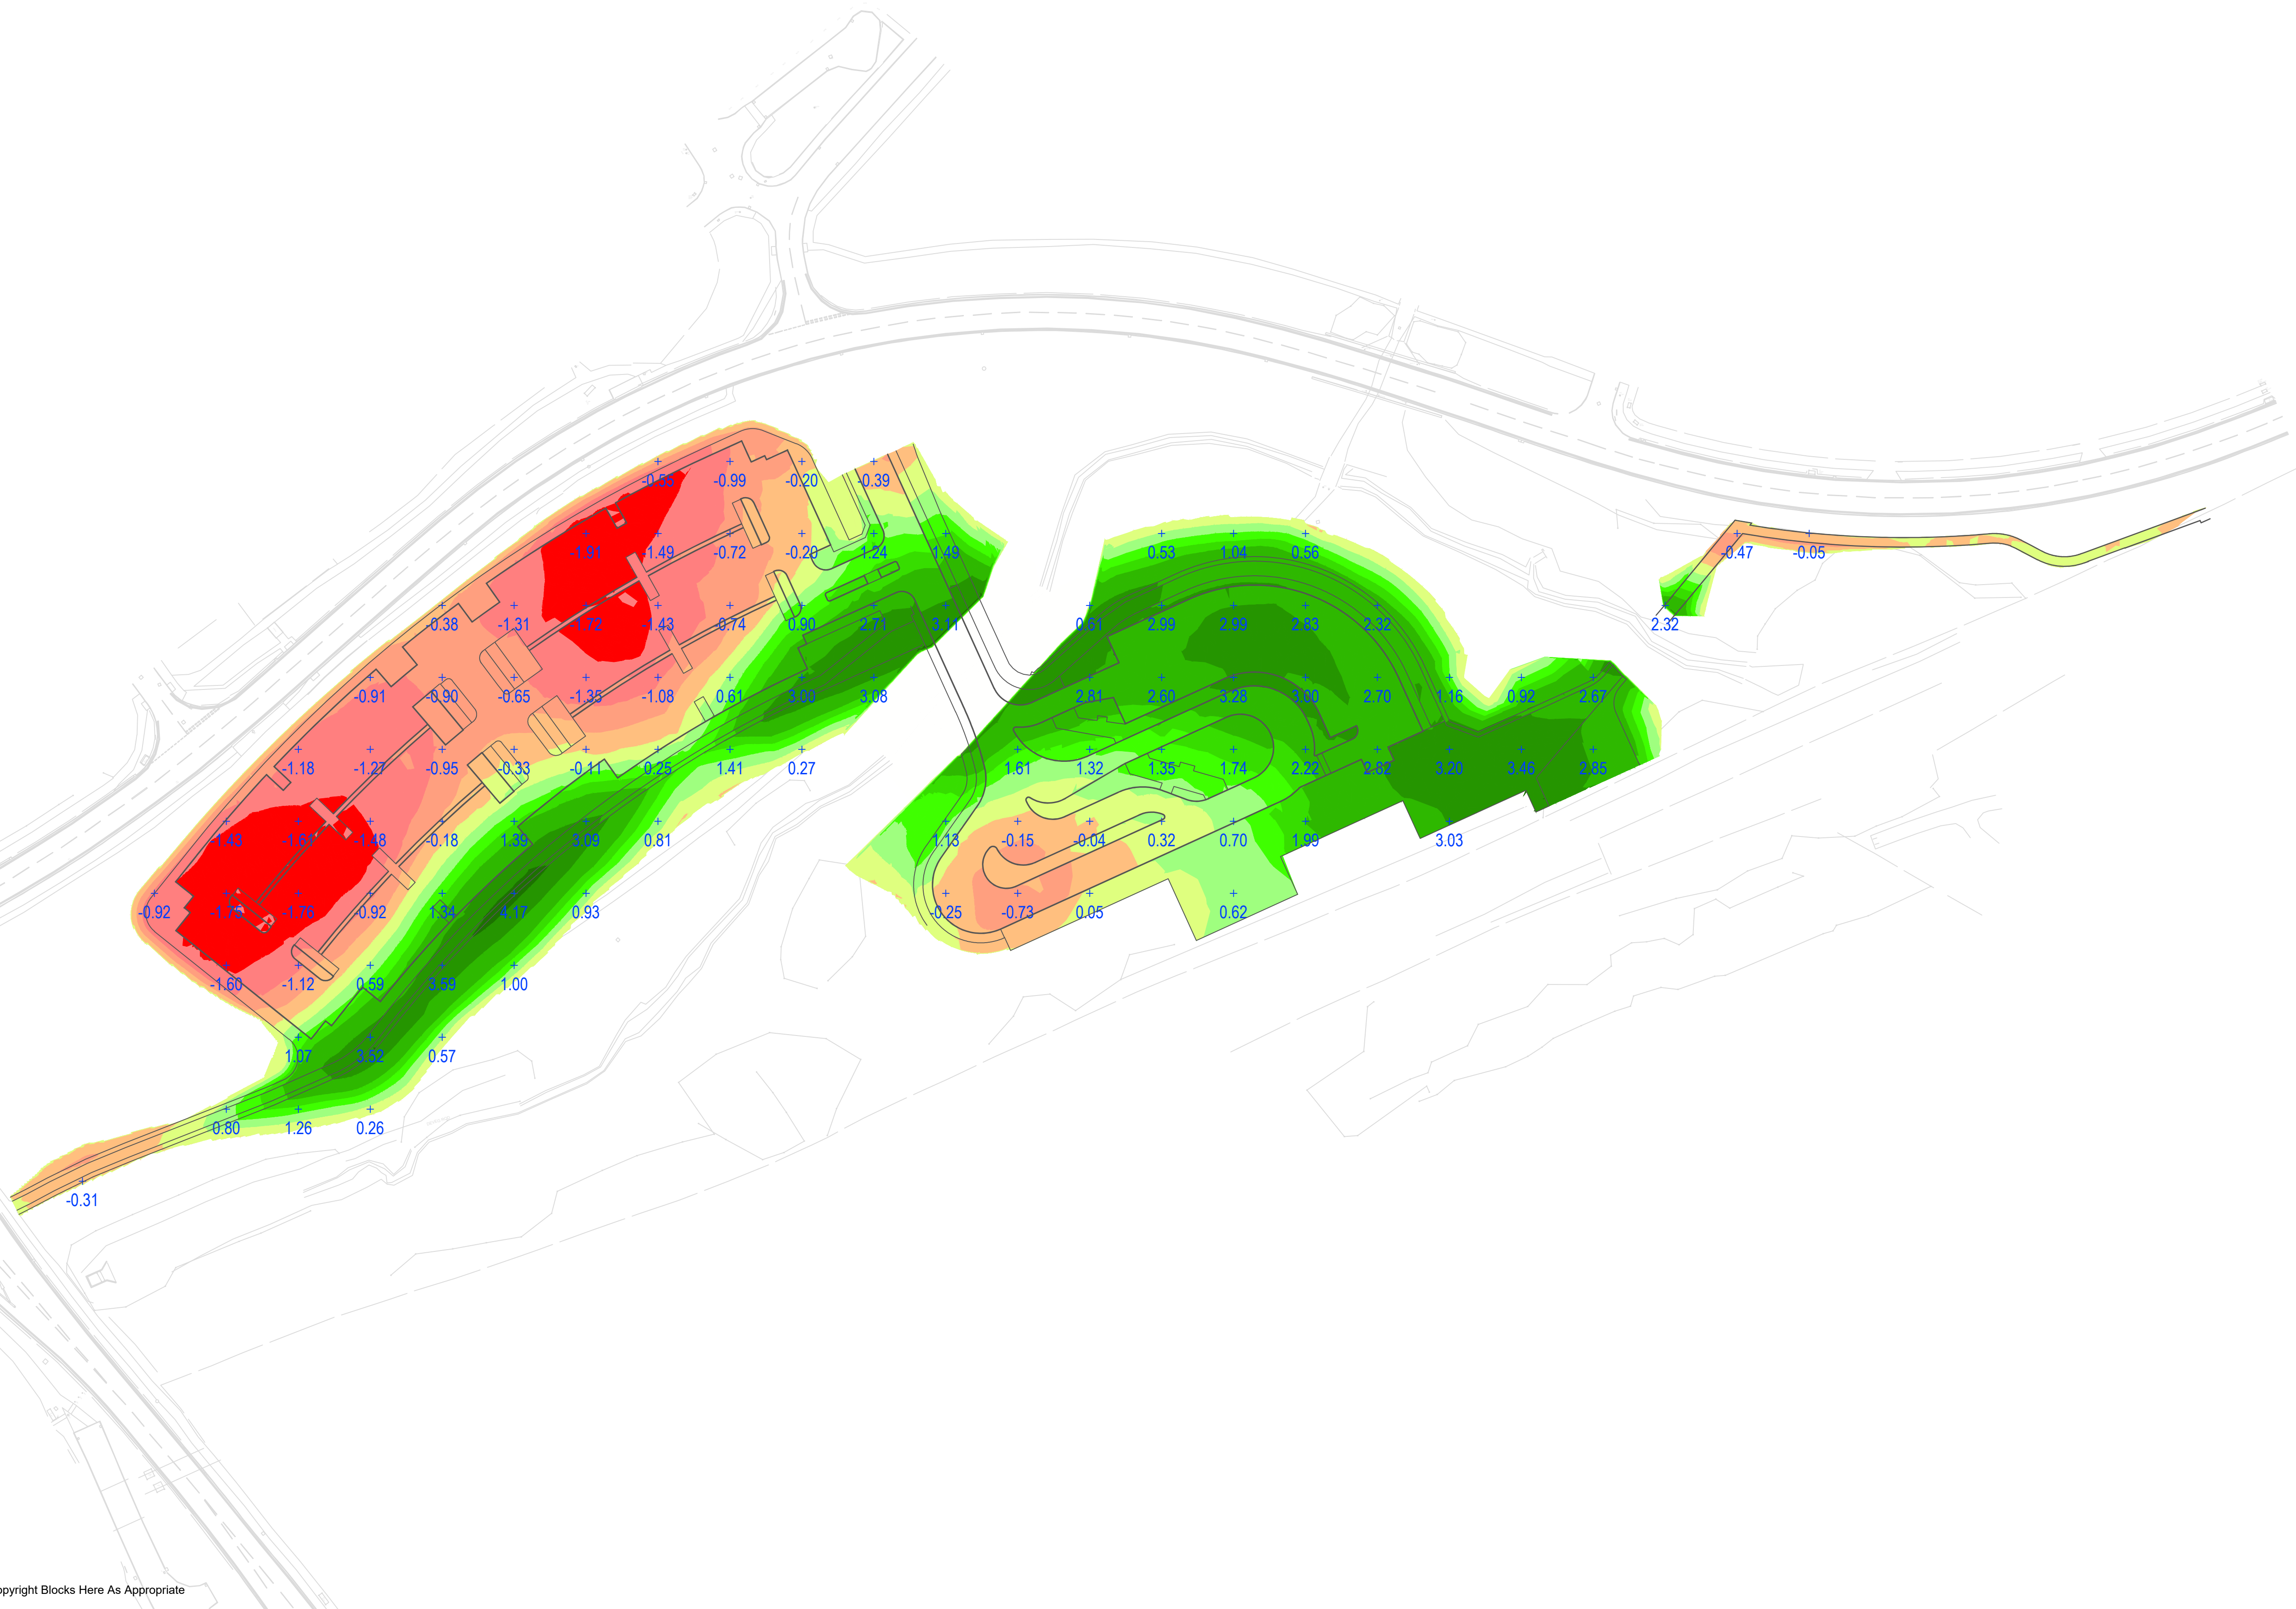




Scale 1:700																			
Notes:																			
BULK EARTHWORKS ANALYSIS																			
In Summary: "F20002-BGC-00-XX-SH-W-6602-P01-S1"																			
Earthworks Summary:																			
1.Strip																			
1.1 5A Topsoil					5,469 m3														
1.2 Hard Material					112 m3					Not included in Topsoil Net									
1.3 Soft Strip (Unacceptable)					29 m3					Not included in Topsoil Net									
2. Resoil																			
2.1 5A Topsoil					2,280 m3														
3. Topsoil Net (1.1 - 2.1)					3,210 m3					Surplus									
BULK EARTHWORKS																			
4. Bulk Earthworks Cut:					15,721 m3					Includes Any Arisings and Stockpiles									
5. Bulk Earthworks Fill:					23,879 m3														
6. Bulk Earthworks Net (4 - 5)					-8,158 m3					Shortfall									
Strip and Construction Depths:																			
TYPE		DESCRIPTION								DEPTH								UNIT	
Existing Strip Depth		Footways																250mm	
Existing Strip Depth		Grass																265mm	
Existing Strip Depth		Vegetation																265mm	
Design Construction Depth		Access Road																505mm	
Design Construction Depth		Batters																300mm	
Design Construction Depth		Car Park																505mm	
Design Construction Depth		Footways																250mm	
Design Construction Depth		Grass																300mm	
Design Construction Depth		Paving																260mm	
Design Construction Depth		Cycle Path																250mm	
Cut / Fill Depths Legend:																			
P01 Isopachyte 6602-P01																			
N. Cetharska		15 Dec 21				15 Dec 21		A. Brereton		15 Dec 21									
Rev Comment																			
Created By		Date		Checked By		Date		Approved By		Date									
Scale at A1		Issuing Office						Project Number											
1:700		STOWE						F20002											
Client Approval																			
A - Approved																			
B - Approved With Comments																			
C - Do Not Use																			
Status		Purpose of Issue																	
S1		For Coordination																	
Silverstone Road, Stowe, Buckingham MK18 5LJ Telephone: 01280 823355 Fax: 01280 812830 www.buckinghamgroup.co.uk																			
Project																			
Headbolt Lane																			
Title																			
Isopachyte Showing cut / fill depths from stripped site levels to formation levels																			
Client																			
BGC- 00- LD- DR- W-6602												P01							
Originator		Zone		Level		Type		Role		Number		Revision							