











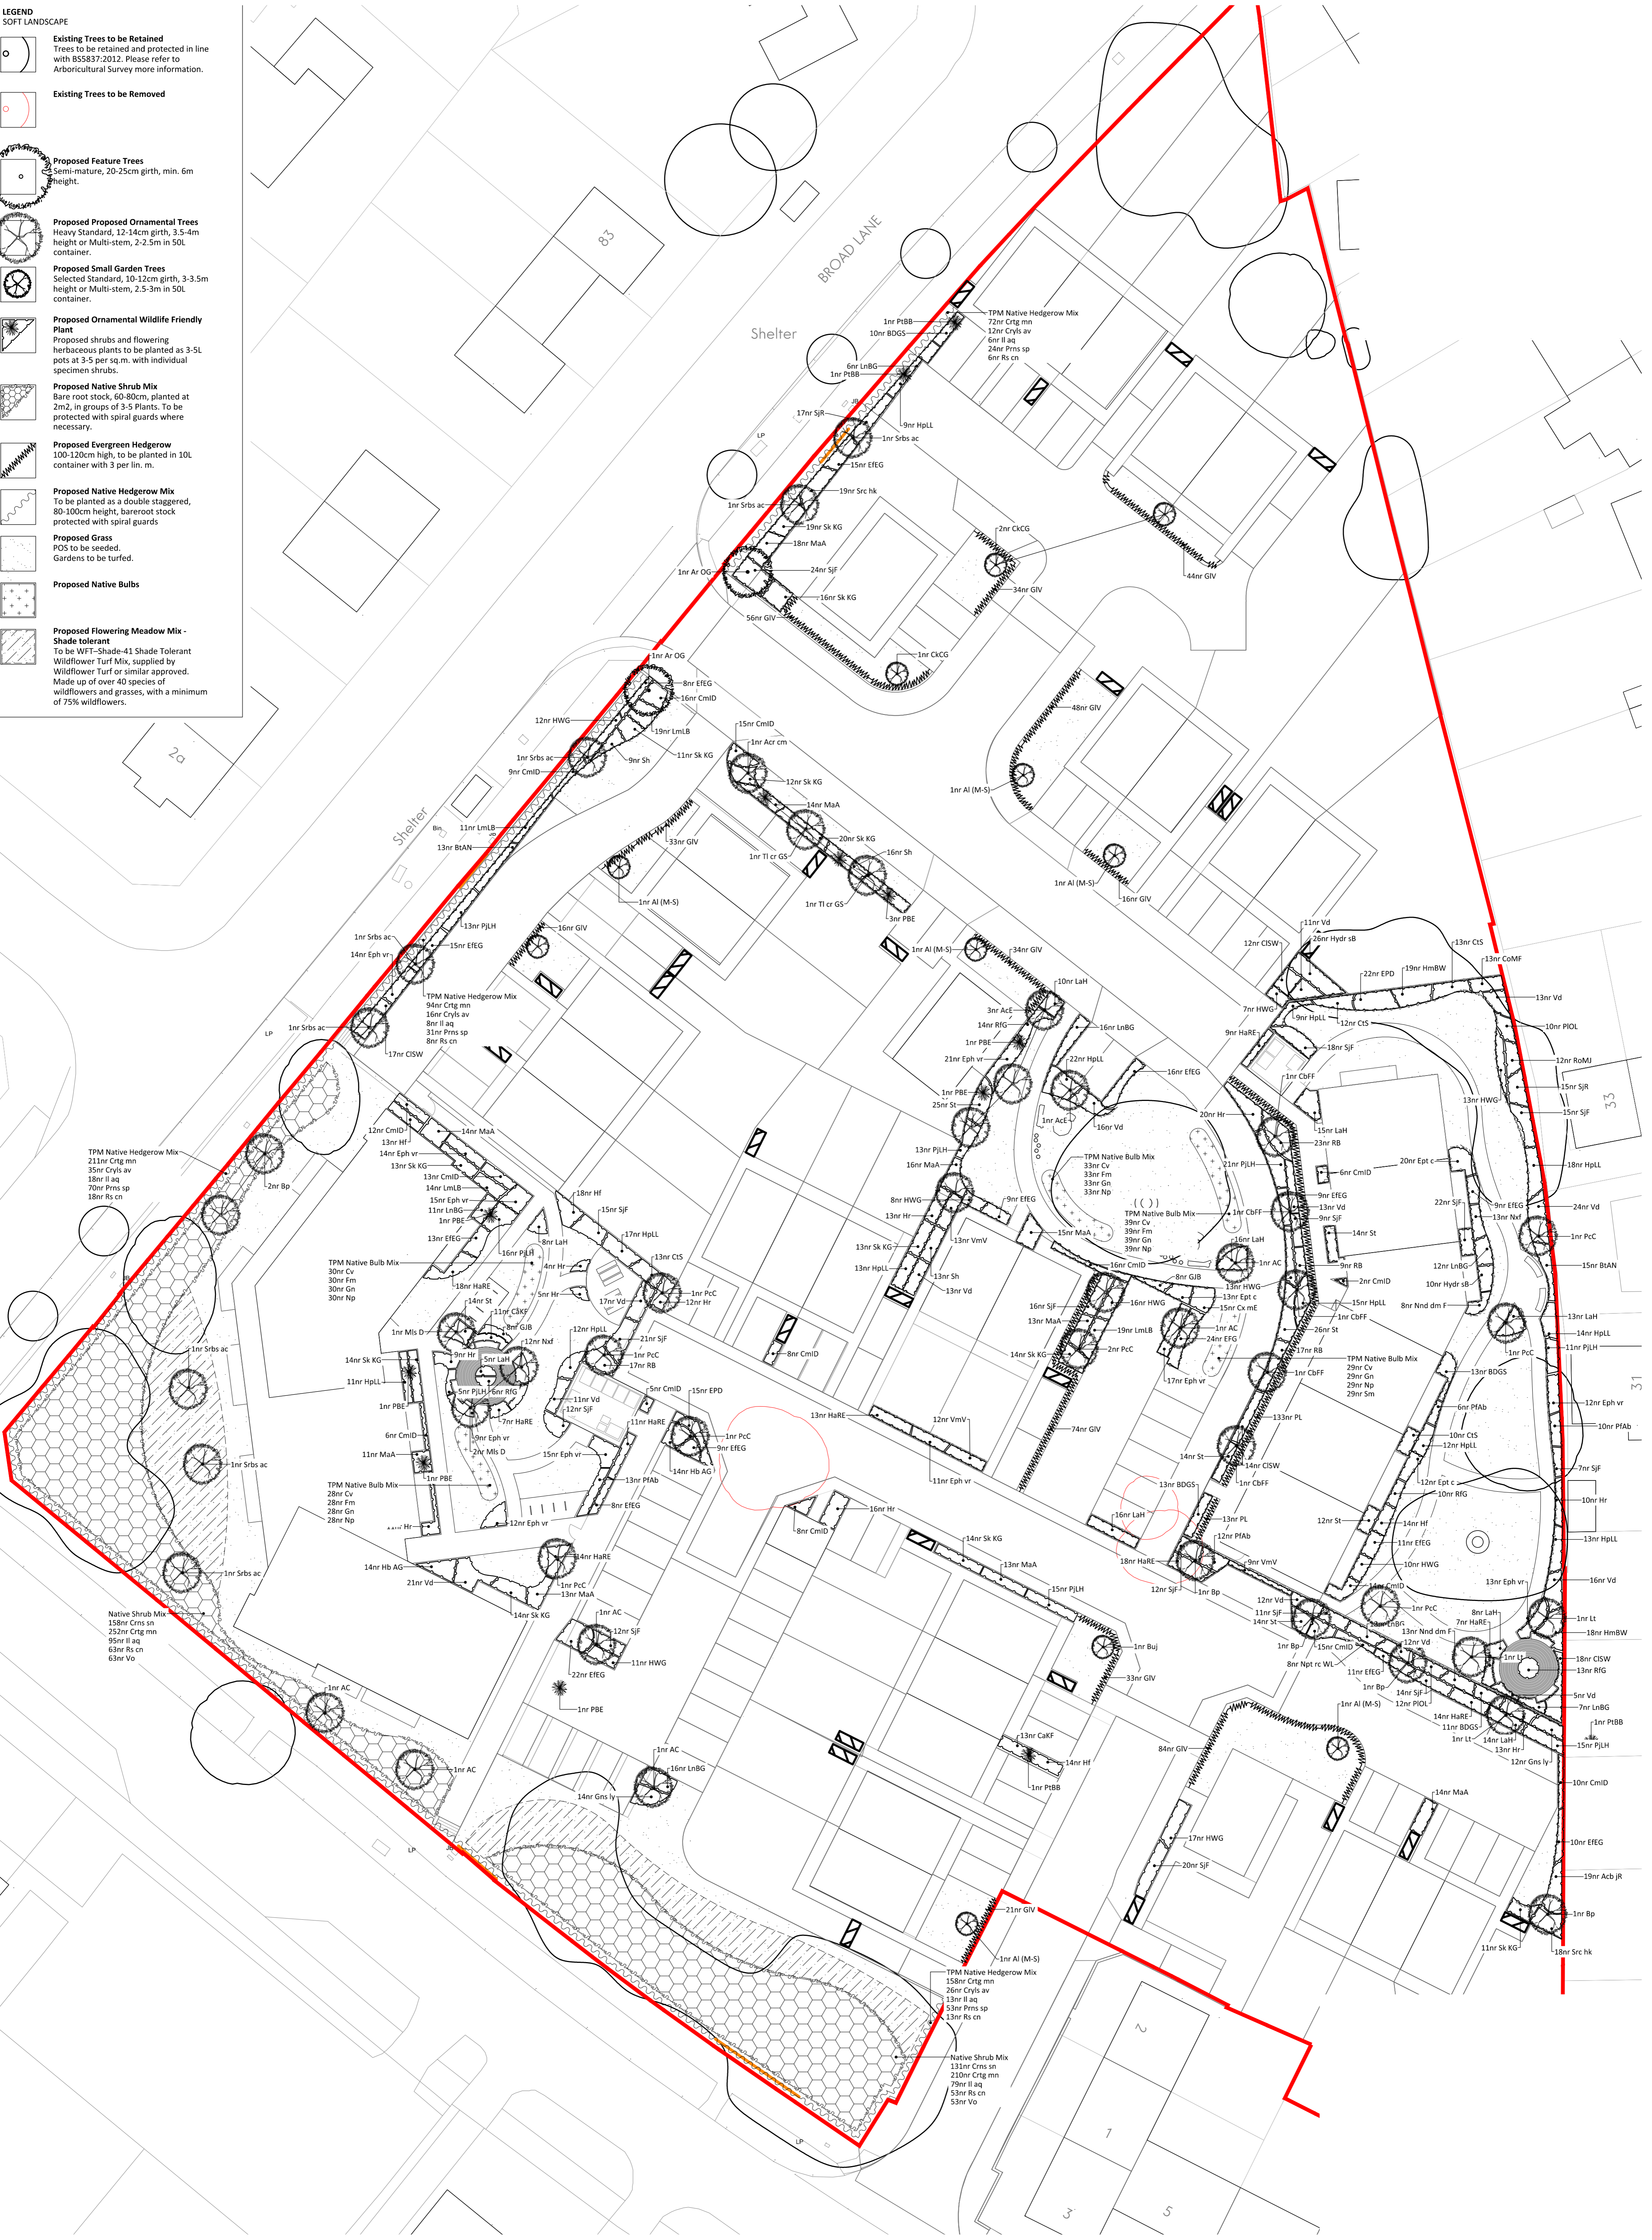


- LEGEND**
SOFT LANDSCAPE
-  **Existing Trees to be Retained**
Trees to be retained and protected in line with BS5837:2012. Please refer to Arboicultural Survey more information.
 -  **Existing Trees to be Removed**
 -  **Proposed Feature Trees**
Semi-mature, 20-25cm girth, min. 6m height.
 -  **Proposed Ornamental Trees**
Heavy Standard, 12-14cm girth, 3.5-4m height or Multi-stem, 2-2.5m in 50L container.
 -  **Proposed Small Garden Trees**
Selected Standard, 10-12cm girth, 3-3.5m height or Multi-stem, 2.5-3m in 50L container.
 -  **Proposed Ornamental Wildlife Friendly Plant**
Proposed shrubs and flowering herbaceous plants to be planted as 3-5L pots at 3-5 per sq.m. with individual specimen shrubs.
 -  **Proposed Native Shrub Mix**
Bare root stock, 60-80cm, planted at 2m2, in groups of 3-5 Plants. To be protected with spiral guards where necessary.
 -  **Proposed Evergreen Hedgerow**
100-120cm high, to be planted in 10L container with 3 per lin. m.
 -  **Proposed Native Hedgerow Mix**
To be planted as a double staggered, 80-100cm height, bare root stock protected with spiral guards
 -  **Proposed Grass**
POS to be seeded.
Gardens to be turfed.
 -  **Proposed Native Bulbs**
 -  **Proposed Flowering Meadow Mix - Shade tolerant**
To be WFT-Shade-41 Shade Tolerant Wildflower Turf Mix, supplied by Wildflower Turf or similar approved. Made up of over 40 species of wildflowers and grasses, with a minimum of 75% wildflowers.



This drawing is the property of GWP Architecture. Copyright is reserved by them and no part of it may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of GWP Architecture.

All drawings and specifications should be read in conjunction with the project brief and any other documents forming part of the contract. Any possible conflicts should be presented to the Planning Consultant.

All work to be carried out in accordance with current Building Regulations.

Contractors must verify all dimensions or the job before commencing any work or making their drawings.

Written dimensions should be taken. Do not scale off drawing. Do not take digital dimensions from this drawing.

Any discrepancies to be reported to the Architect.

Rev	Date	Comment	Dr	Ch
P04	24.10.25	Planning Issue	MK	DT
P03	02.10.25	General Updates	MK	RT
P02	24.09.24	Update to Block C Landscaping	JB	RT
P01	10.09.24	First Issue	DT	RT

Rev	Date	Comment	Dr	Ch
P04	24.10.25	Planning Issue	MK	DT
P03	02.10.25	General Updates	MK	RT
P02	24.09.24	Update to Block C Landscaping	JB	RT
P01	10.09.24	First Issue	DT	RT

GWA Ref: (529)2316
Job No: Livv Housing Gaywood Green
Client: Livv Housing Group

Proposed Site Landscape Planting Plan	
Name	(529)2316-GWP-01-00-D-A-(PA)-0012
Scale	1:250@A1
Revision	P04
Drawn/Checked	DT / RT
First Issue	10.09.24
Drawing Status	S2 - Planning



CHARTERED ARCHITECTS
INTERIOR DESIGNERS
SPACE PLANNERS
PROJECT MANAGERS
LANDSCAPE ARCHITECTS

83 St Tower Works, 2 Colne Road, Leach, H11 9DG
+44(0)113 266 6044 (t) +44(0)113 268 1859 (f)
architectural@gwp-arch.com | www.gwp-arch.com