


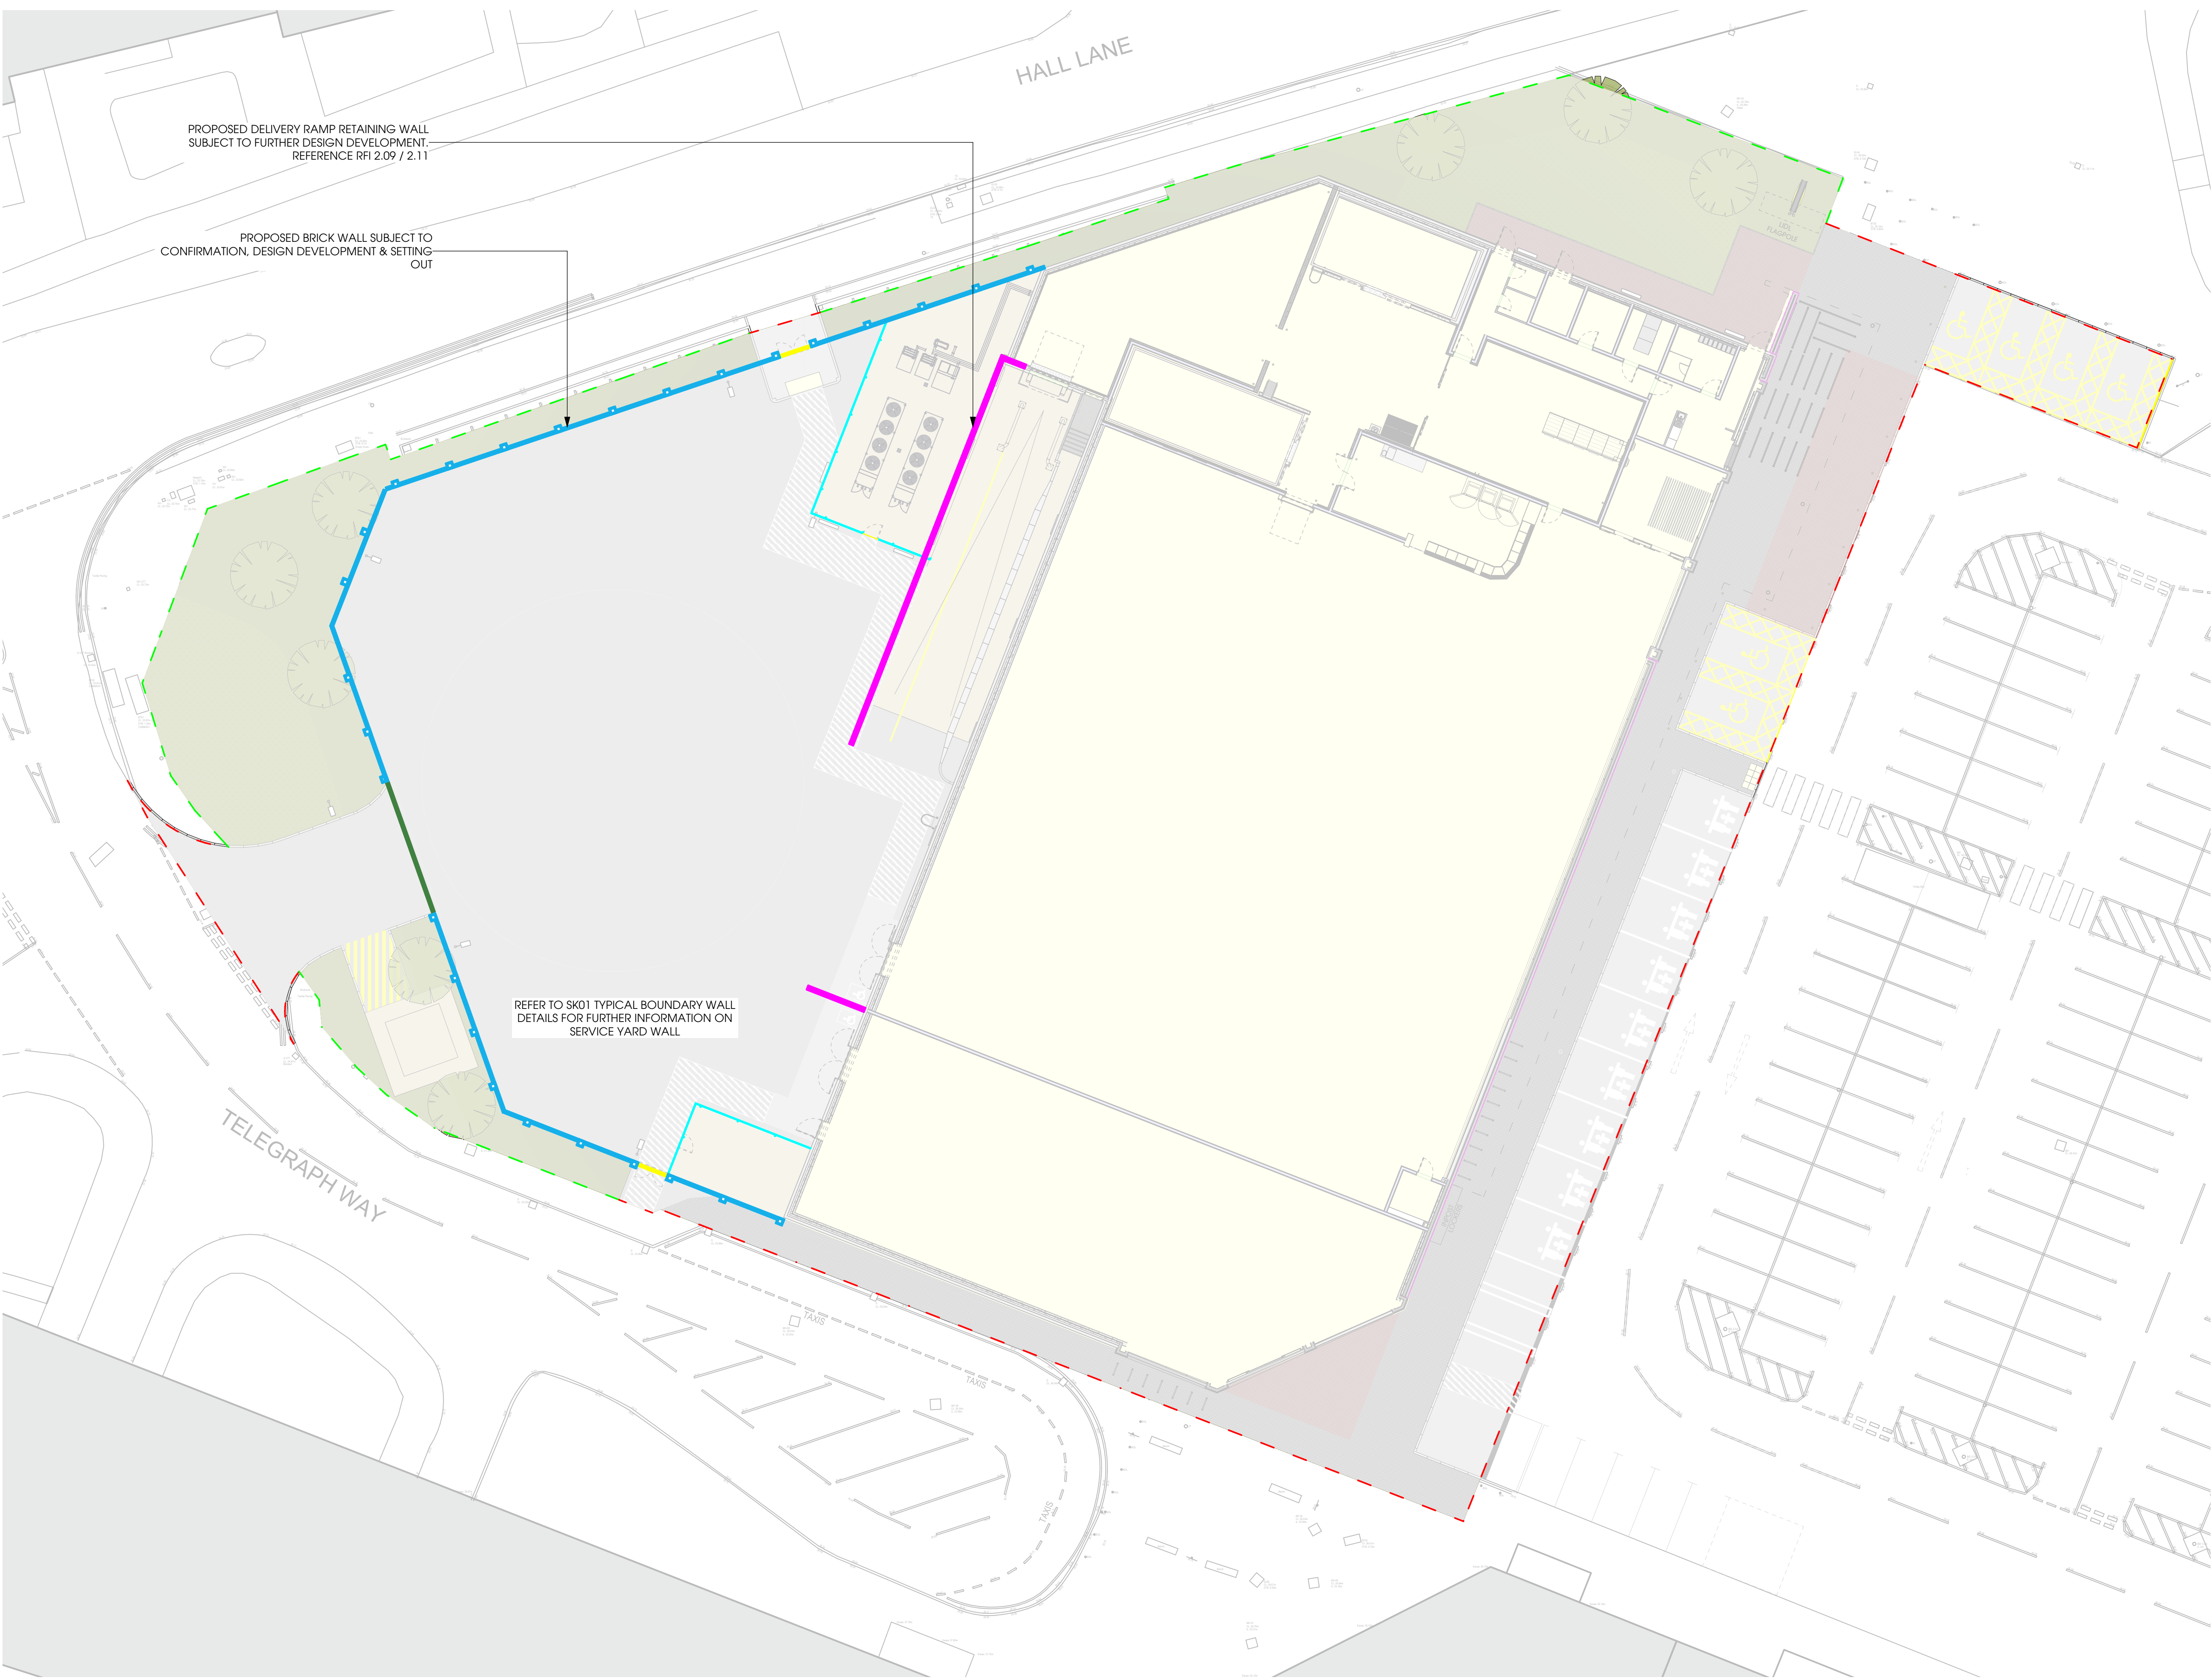

REFER TO HTC ARCHITECTS RFI
SCHEDULE DQ-2.1 NO.2.26

BOUNDARY TREATMENTS

BRICK WALL WITH PEIRS 1.8m - BRICK WALL WITH PEIRS. SPACE IN LINE WITH STRUCTURAL ENGINEERS RECOMMENDATIONS. TO BE IBSTOCK STAFFORDSHIRE BLUE BRINDLE SMOOTH (A2220A) TO MATCH PROPOSED BUILDING. REFER TO SK01 TYPICAL BOUNDARY WALL DETAILS FOR FURTHER INFORMATION ON SERVICE YARD WALL

PALADIN FENCE (RAL 7037) 1.8m - FENCE TO BE SECURED USING POSTS AT 2515mm CENTRES WITH 2500mm PANELS OF 50x50x4.0 SHS GALVANISED AND BUTT WELDED AT THE CORNERS. 200x50x5mm MESH FIXING TO FRONT FACE OF POST WITH PATENT FIXINGS

FIRE ESCAPE GATE (RAL 7037) 1.8m - 80x80x8mm SHS GALVANISED STEEL POSTS WELDED TO BASE PLATE USING 6mm C.F.W. 260x600x20mm BASE PLATE, FIXED TO RC SLAB WITH 2 NO. HILT-HIT RE 500 M20 HIS-N ANCHORS

AUTOMATIC SLIDING GATE - PROPOSED SLIDING GATE. IN ACCORDANCE WITH COUNCILS SPECIFICATION

RETAINING WALL WITH HANDRAIL - HEIGHT OF HANDRAIL TO BE MINIMUM OF 1.1m ABOVE FINISHED FLOOR LEVEL. IN ACCORDANCE WITH APPROVED DOCUMENT K GUIDANCE. RETAINING WALL SUBJECT TO STRUCTURAL ENGINEER DESIGN.

HANDRAIL 1.1m - HEIGHT OF HANDRAIL TO BE MINIMUM OF 1.1m ABOVE FINISHED FLOOR LEVEL. IN ACCORDANCE WITH APPROVED DOCUMENT K GUIDANCE. RETAINING WALL SUBJECT TO STRUCTURAL ENGINEER DESIGN.

OPEN HARDSCAPE BOUNDARY

OPEN LANDSCAPE BOUNDARY

0 5 10 15 20 25 m