


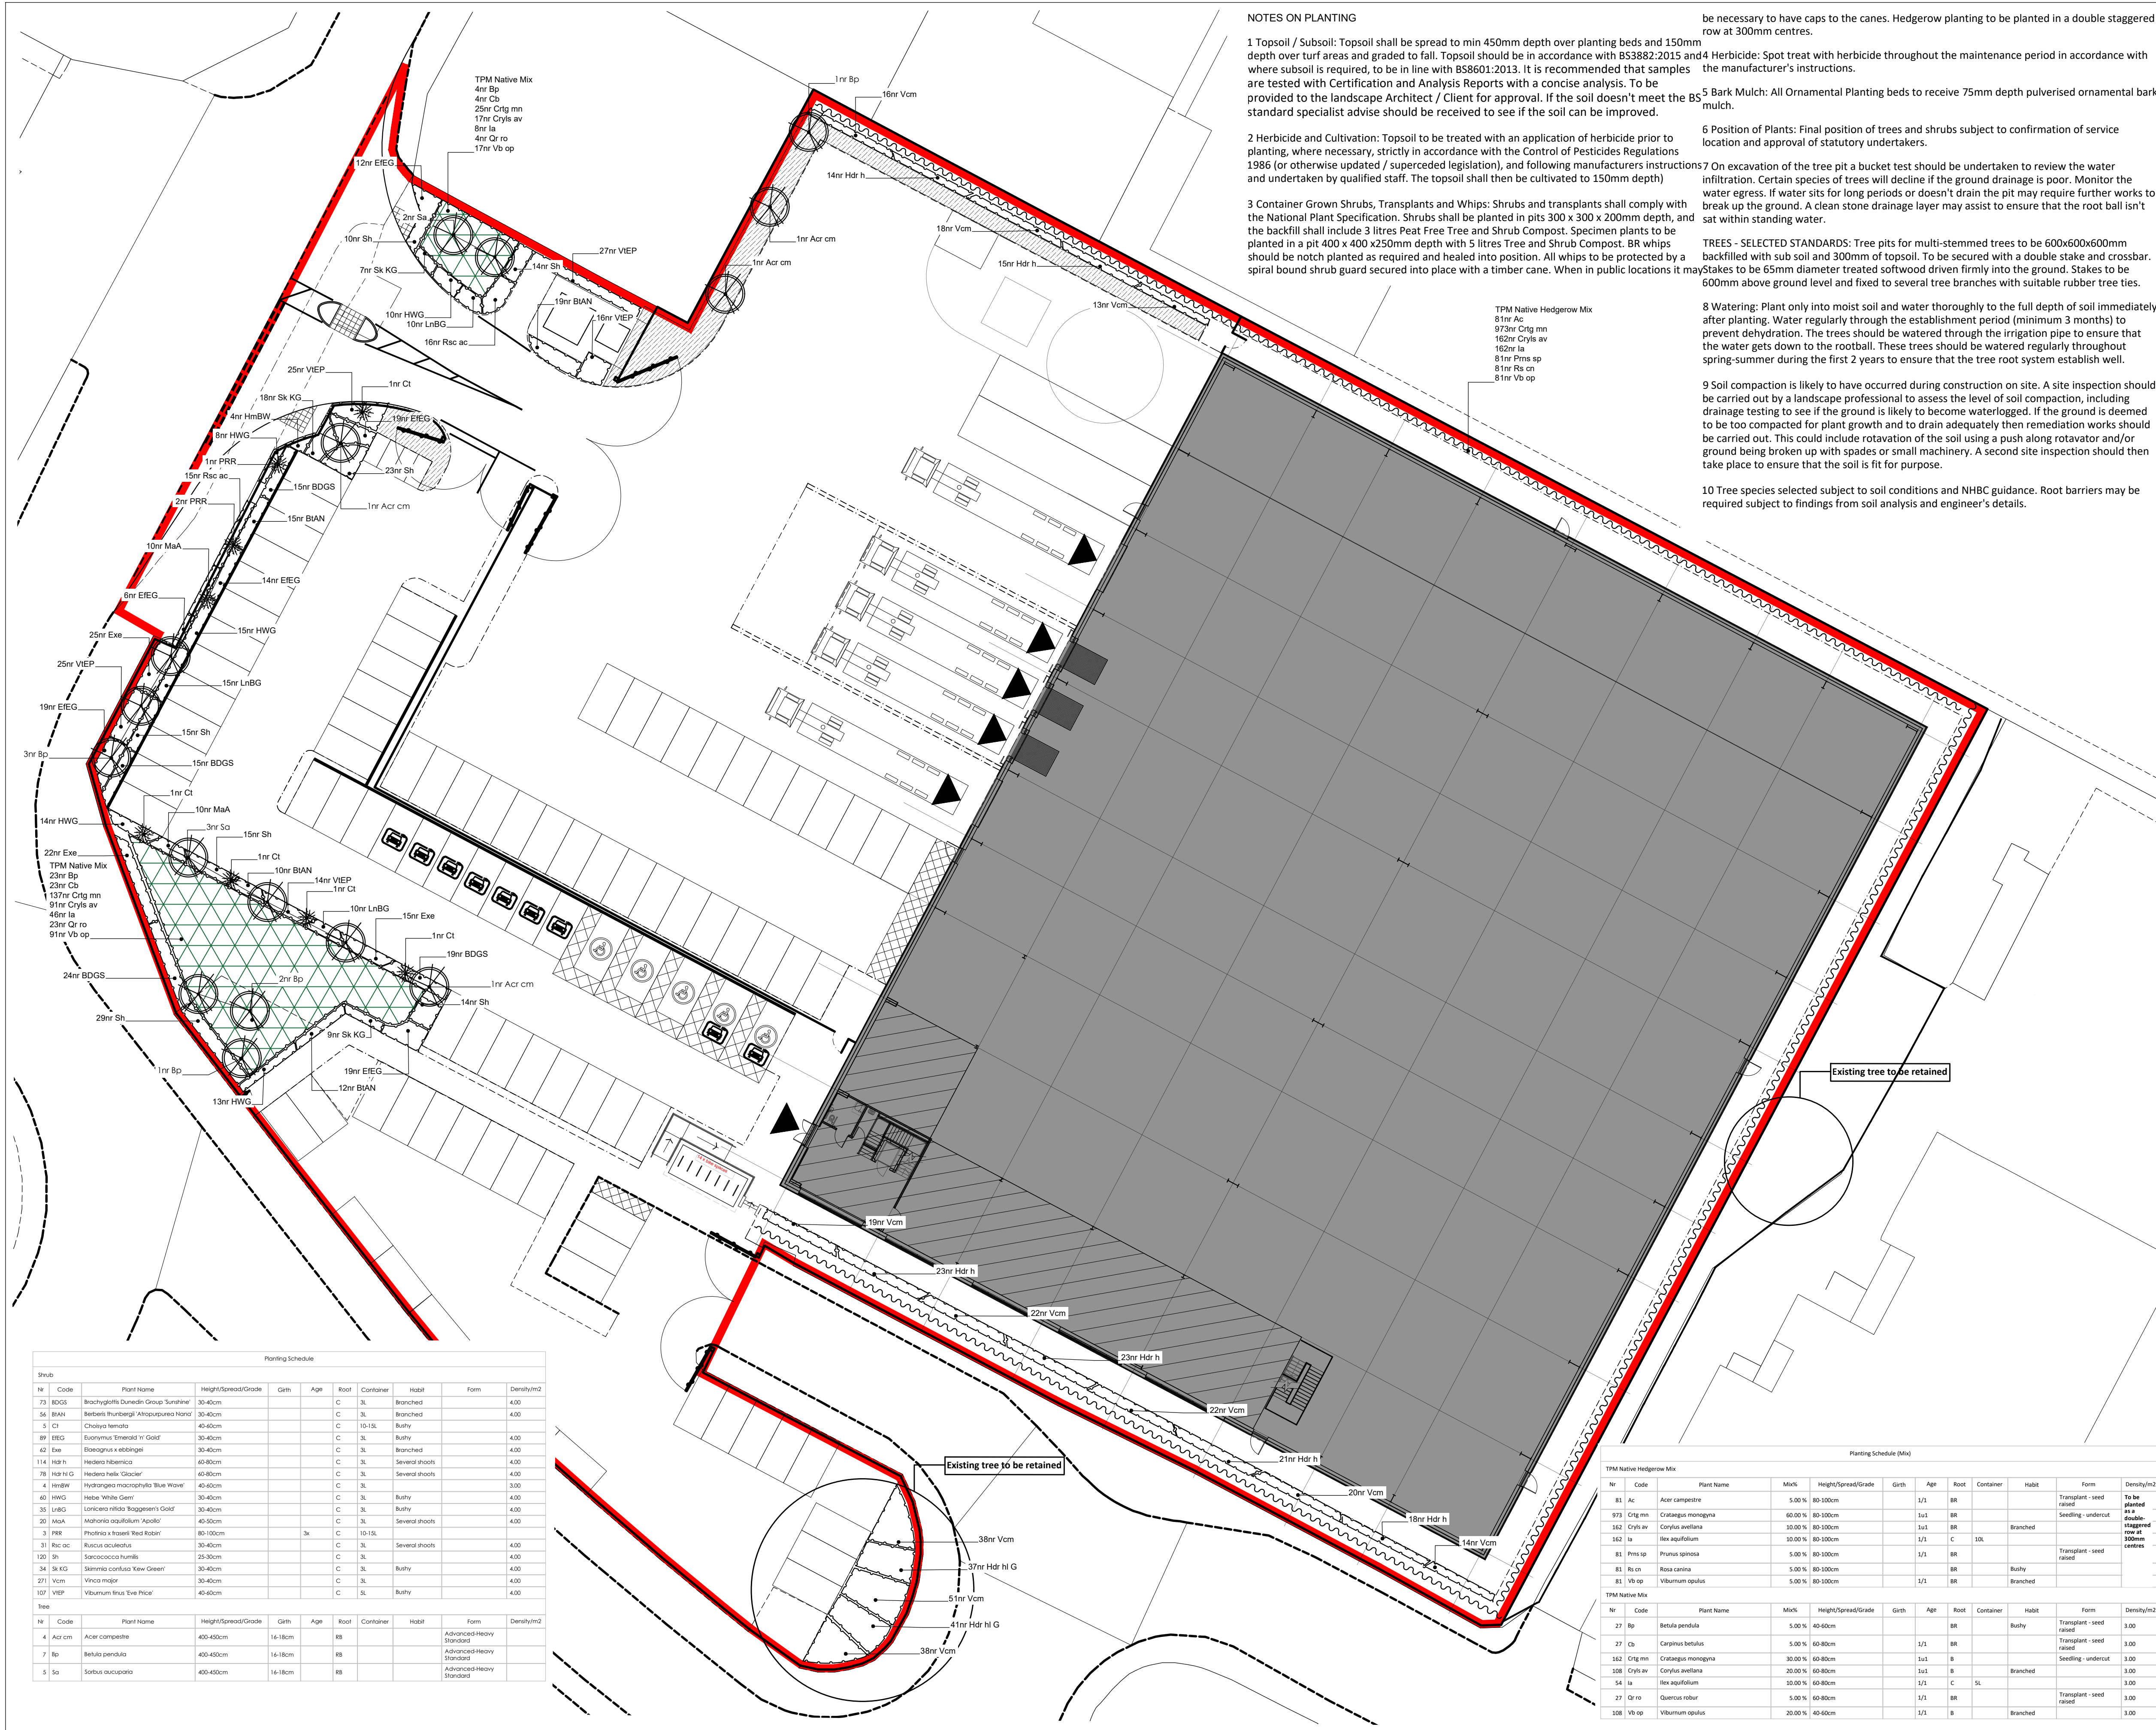

NOTES ON PLANTING

1 Topsoil / Subsoil: Topsoil shall be spread to min 450mm depth over planting beds and 150mm depth over turf areas and graded to fall. Topsoil should be in accordance with BS3882:2015 and 4 Herbicide: Spot treat with herbicide throughout the maintenance period in accordance with the manufacturer's instructions.

2 Herbicide and Cultivation: Topsoil to be treated with an application of herbicide prior to planting, where necessary, strictly in accordance with the Control of Pesticides Regulations 1986 (or otherwise updated / superceded legislation), and following manufacturers instructions and undertaken by qualified staff. The topsoil shall then be cultivated to 150mm depth)

3 Container Grown Shrubs, Transplants and Whips: Shrubs and transplants shall comply with the National Plant Specification. Shrubs shall be planted in pits 300 x 300 x 200mm depth, and the backfill shall include 3 litres Peat Free Tree and Shrub Compost. Specimen plants to be planted in a pit 400 x 400 x 250mm depth with 5 litres Tree and Shrub Compost. BR whips should be notch planted as required and healed into position. All whips to be protected by a spiral bound shrub guard secured into place with a timber cane. When in public locations it may

be necessary to have caps to the canes. Hedgerow planting to be planted in a double staggered row at 300mm centres.

5 Bark Mulch: All Ornamental Planting beds to receive 75mm depth pulverised ornamental bark mulch.

6 Position of Plants: Final position of trees and shrubs subject to confirmation of service location and approval of statutory undertakers.

7 On excavation of the tree pit a bucket test should be undertaken to review the water infiltration. Certain species of trees will decline if the ground drainage is poor. Monitor the water egress. If water sits for long periods or doesn't drain the pit may require further works to break up the ground. A clean stone drainage layer may assist to ensure that the root ball isn't sat within standing water.

TREES - SELECTED STANDARDS: Tree pits for multi-stemmed trees to be 600x600x600mm backfilled with sub soil and 300mm of topsoil. To be secured with a double stake and crossbar. stakes to be 65mm diameter treated softwood driven firmly into the ground. Stakes to be 600mm above ground level and fixed to several tree branches with suitable rubber tree ties.

8 Watering: Plant only into moist soil and water thoroughly to the full depth of soil immediately after planting. Water regularly through the establishment period (minimum 3 months) to prevent dehydration. The trees should be watered through the irrigation pipe to ensure that the water gets down to the rootball. These trees should be watered regularly throughout spring-summer during the first 2 years to ensure that the tree root system establish well.

9 Soil compaction is likely to have occurred during construction on site. A site inspection should be carried out by a landscape professional to assess the level of soil compaction, including drainage testing to see if the ground is likely to become waterlogged. If the ground is deemed to be too compacted for plant growth and to drain adequately then remediation works should be carried out. This could include rotavation of the soil using a push along rotavator and/or ground being broken up with spades or small machinery. A second site inspection should then take place to ensure that the soil is fit for purpose.

10 Tree species selected subject to soil conditions and NHBC guidance. Root barriers may be required subject to findings from soil analysis and engineer's details.

LEGEND

SOFT LANDSCAPE

- Existing Trees to be retained
- Proposed Trees
Advanced Heavy Standard, 16-18cm girth, 400-450cm high.
- Proposed Shrubs
Proposed shrubs and flowering herbaceous, 3-5L pots at 3-5 per m² to be punctuated with specimen shrubs in 10-15L pots
- Proposed Native Hedgerow
80-100cm high, BR stock planted as a double staggered row at 300mm centres
- Proposed Native Shrub Mix
To be a mix of native planting, 3-5L pots at 3-5 per m² in groups of 5-10.
- Proposed Wildflower Meadow Mix
To be Emorsgate EM2 Standard General Purpose Meadow Mix, supplied by Emorsgate or similar approved. Sowing rate 4g/m².

GENERAL NOTES

- This drawing is the copyright of TPM Landscape Ltd and cannot be reproduced in any form without the consent of the company.
- This drawing is to be read in conjunction with detail landscape drawings, details and specification.
- This drawing is to be read in conjunction with all relevant Architects', Engineer's, Specialists, Bills of Quantities and Specifications.
- The insertion of any firm or proprietary brand on this drawing is an indication of the class or quality required and does not exclude the use of alternative materials that are equal in performance, quality and appearance, provided that they have been approved in writing by the Landscape Architect.
- The Contractor is responsible for accurately ascertaining the position of underground services and responding to all relevant service easement requirements.
- All dimensions are in millimetres unless stated otherwise, for the purposes of construction this drawing must not be scaled and only written dimensions used. Written and scaled dimensions to be checked on site, any discrepancies reported prior to work commencing. IF IN DOUBT PLEASE ASK.
- All work and materials are to be in accordance with the relevant British Standards and Code of Practice.
- All Proprietary products are to be used strictly in accordance with the manufacturer's instructions and details.

REVISION NOTES

Rev	By	Description	Date
F	AJ	Updated in line with comments	19.01.24
E	AJ	Updated in line with latest layout	02/06/23
D	TS	Updated with comments	24/11/22
C	TS	Updated with additional trees	24/11/22
B	TS	Updated in line with latest layout	23/11/22

Client

Redsun Projects

Project

Knowsley East Hub

Description

Planting Plan

Status

For Approval

Scale @ A1
1:250
Job number
4141

Drawn
AJW
Drawing number
201

Checked
KP
Date
24.11.22

Revision
F

tpm landscape
chartered landscape architects
address: 4th Floor Studio 10 Little Lever St Manchester M1 1HR
tel: 0161 235 0600 fax 0601 email info@tpmlandscape.co.uk