


Inceptor® EVO

Technical Specification

Product Code: OV9505WH93EM

Luckinslive 407973581

Description: 12W LED Utility Eyelid Bulkhead With Emergency IP65 CW White

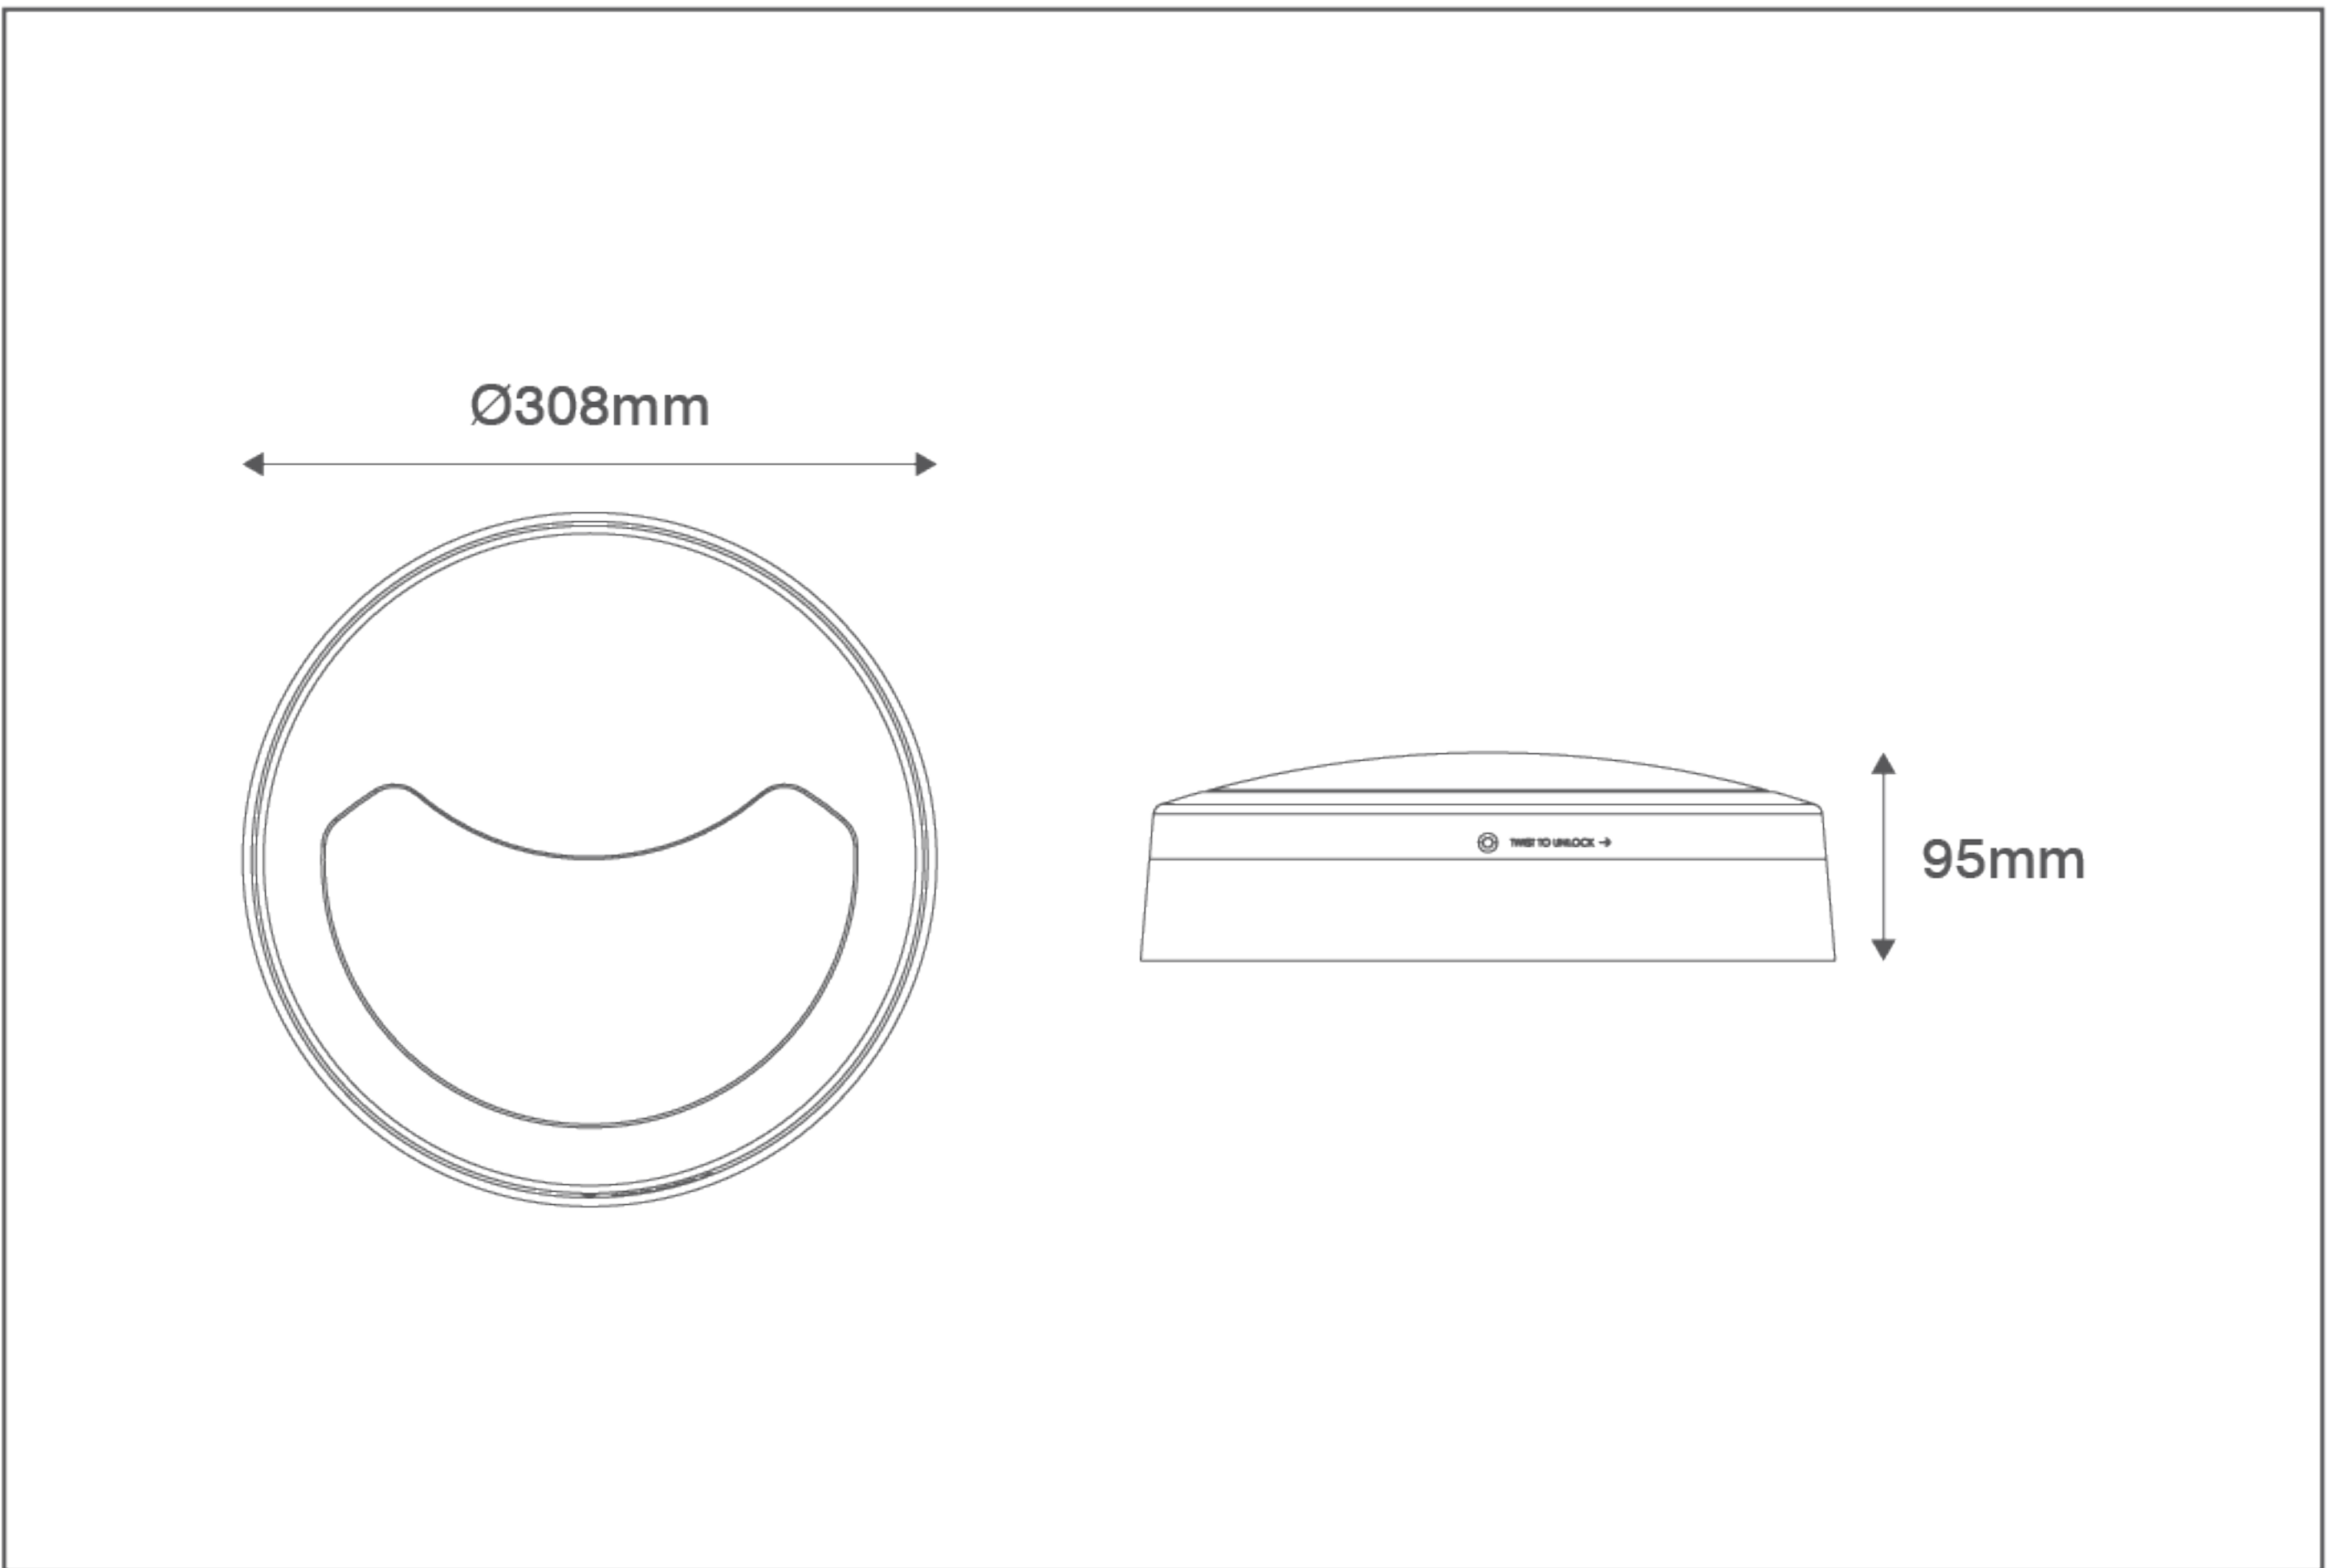

General Information

Dimensions (mm)	308 (Dia.) x 93 (D)
Materials	Base, Outer Ring, Circular Facia & Diffuser: Polycarbonate (UV Stabilised); Gear Tray, Driver Housing & Cable Grip: Polycarbonate (UV Stabilised); LED Array: Aluminium Substrate; Moisture Seal: Silicone
Colour	White (RAL9010)
Product Weight (Kg)	1.54
Cutout Diameter (mm)	282
Recess Depth (mm)	80
Ingress Protection	IP65
Impact Rating (IK)	08
Flammability Rating	Tp(a)
Mounting	Ceiling or Wall and Surface or Semi-recessed
Warranty (Years)	5
Battery Warranty (Years)	4
On Site Warranty	1 Year Unregistered, 2 Year Registered (https://oviauk.com/on_site_warranty)

Supply & Power Information


Continuous Operating Voltage (AC) (Hz)	220-240 (50/60)
Safety Class	II
Circuit Wattage (W)	12
LED Wattage (W)	10
Input Current (mA)	107
Operating Temperature (°C)	+5 to +45
Driver Information	Integrated
Prewired Flow™ Connector	4 Pole CT203-F With Loop Screw Terminals

Luminaire Output

Colour Temperature (K)	4200
Colour Render Index (CRI)	68.4
Typical Luminous Flux (lm)	543
Efficacy (lm/W)	45
Beam Angle (°)	120
Emergency Luminous Flux (lm)	141
LED Lifetime (L70) (Hours)	50000

Emergency Backup Information

Emergency Luminous Flux (lm)	141
Installation	Can be wired as maintained or non-maintained
Minimum Duration (Hours)	3
Battery Warranty (Years)	4

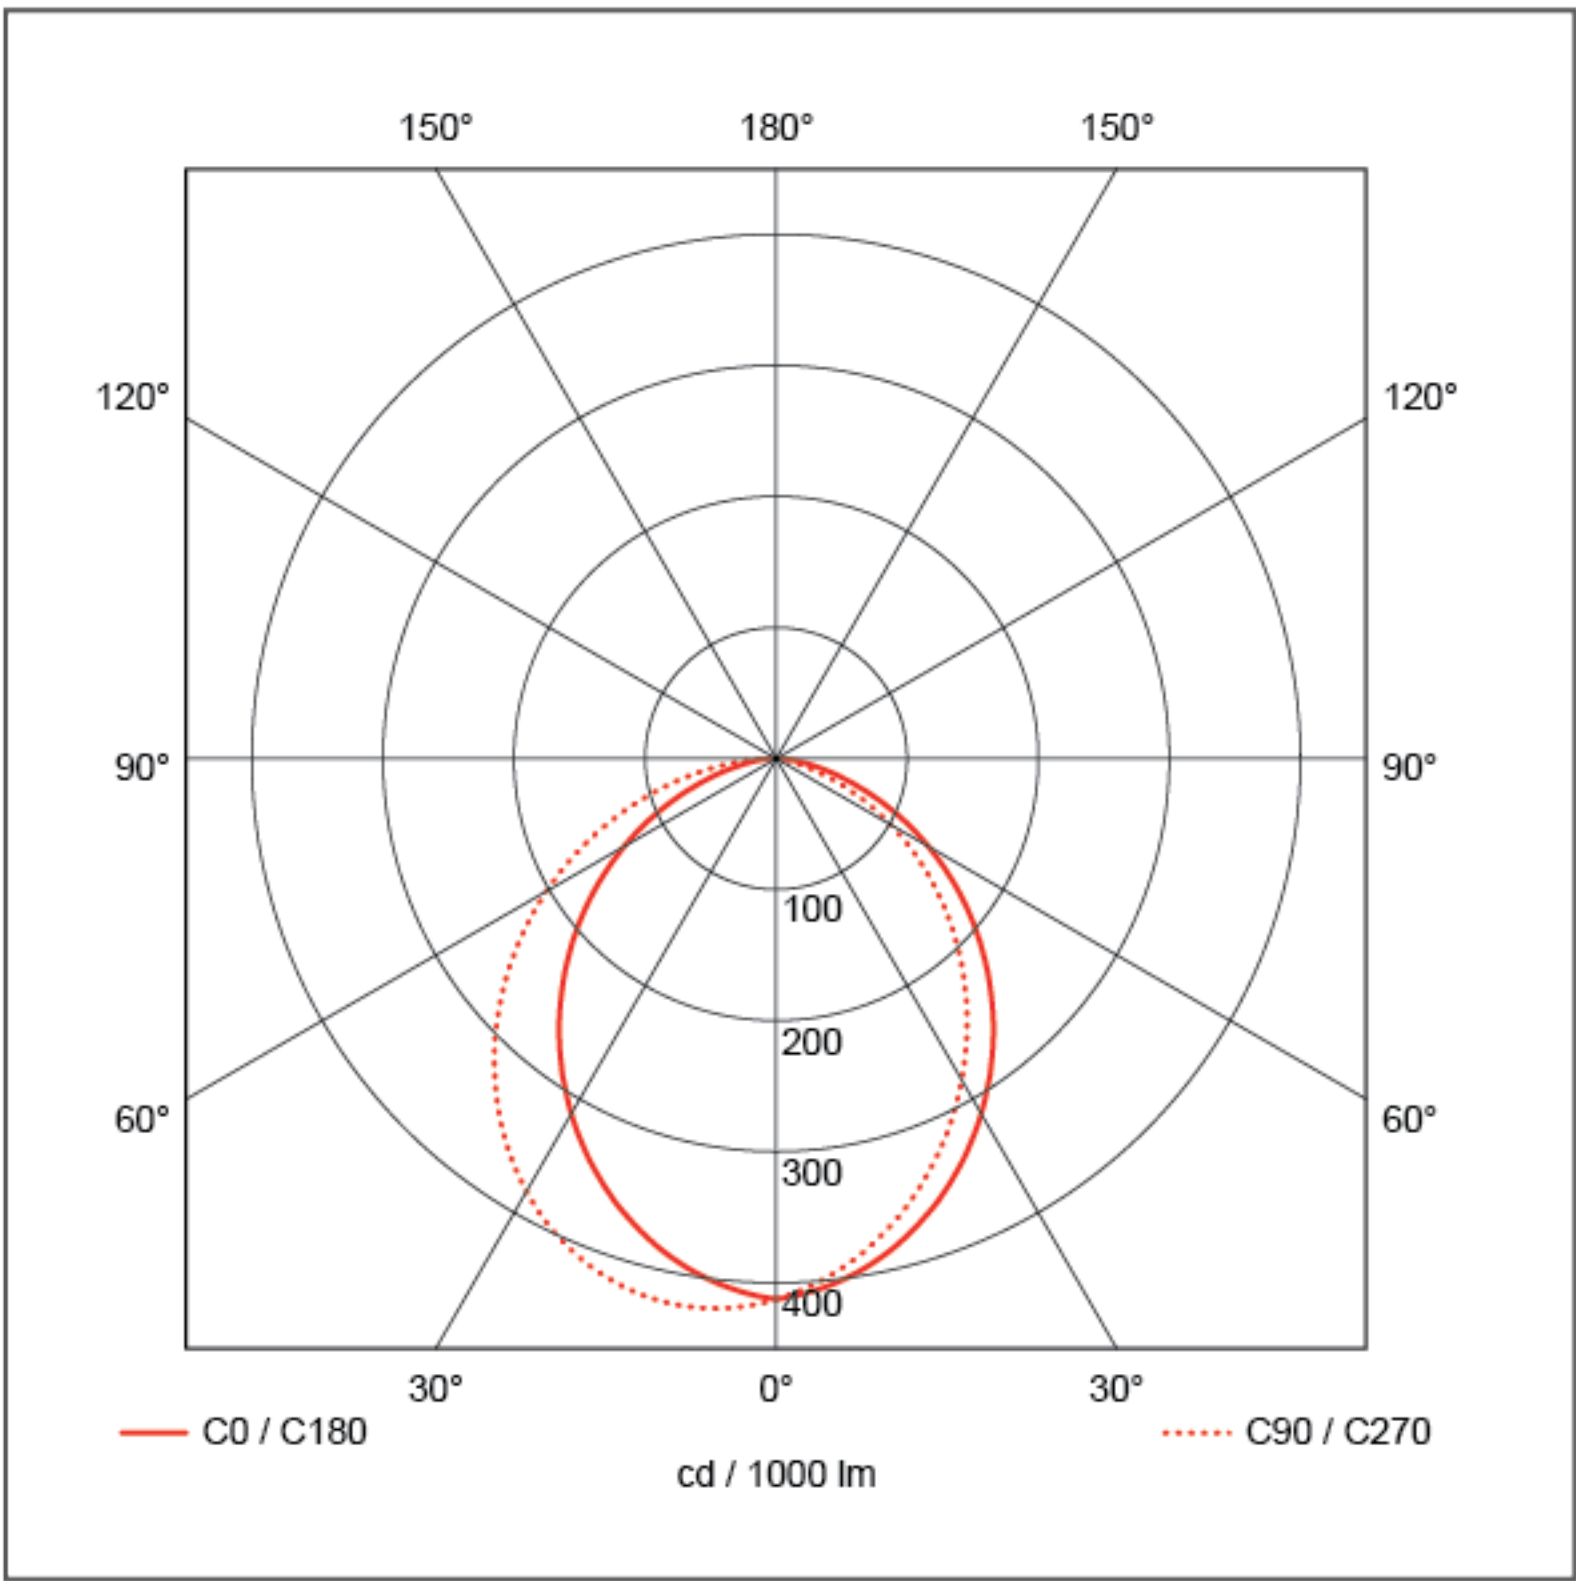

Catalogue



Section



DoC



Installation

