

PLANT SCHEDULE

Trees - Public Open Space

Abbr	Species	Supply	Size	Girth	Number
AMARH	Amelanchier arborea 'Robin Hill'	HStd: Clear stem minimum 200cm: RB	350-425cm	12-14cm	2
AMEBA	Amelanchier 'Ballerina'	HStd: Clear stem minimum 200cm: RB	350-425cm	12-14cm	1
BETJACA	Betula utilis jacquemontii	HStd: Clear stem minimum 200cm: RB	350-425cm	12-14cm	2
MAGGAL	Magnolia 'Galaxy'	HStd: Clear stem minimum 200cm: RB	350-425cm	12-14cm	2
SORAUSS	Sorbus aucuparia 'Sheerwater Seedling'	HStd: Clear stem minimum 200cm: RB	350-425cm	12-14cm	2
AMARH	Amelanchier arborea 'Robin Hill'	EHStd: Clear stem minimum 200cm: RB	425-600cm	14-16cm	24
BETJACA	Betula utilis jacquemontii	EHStd: Clear stem minimum 200cm: RB	425-600cm	14-16cm	8
MAGGAL	Magnolia 'Galaxy'	EHStd: Clear stem minimum 200cm: RB	425-600cm	14-16cm	16
MAGKO	Magnolia kobus	EHStd: Clear stem minimum 200cm: RB	425-600cm	14-16cm	16
MALEV	Malus 'Evereste'	EHStd: Clear stem minimum 200cm: RB	425-600cm	14-16cm	2
MALTRI	Malus trilobata	EHStd: Clear stem minimum 200cm: RB	425-600cm	14-16cm	3
					Total :78

Specimen Shrubs

Abbr	Species	Pot Size	Height	Habit	Number
PHOJE	Phormium 'Jester'	25L	100-125cm	Trp Crn	21
PHOPLBL	Phormium 'Platt's Black'	25L	100-125cm	Trp Crn	12
PHOWAVA	Phormium 'Yellow Wave'	25L	100-125cm	Trp Crn	10
PHOHALS	Photinia fraseri 'Red Robin'	25L	150-175cm	Topiay half std.	11
PHOFRR	Photinia x fraseri 'Red Robin'	50L	200-225cm	SStd: 10-12cm	3
					Total :57

Single-Species Hedgerows

Abbr	Species	Pot Size	Height	Habit	Density	Number
EUJAPJH	Euonymus japonicus 'Jean Hugues'	10L	30-40cm	Bushy	0.3Ctr	1202
ELAEB	Elaeagnus x ebbingei	10L	80-100cm	Bushy	0.4Ctr	512
VIBTIEVP	Viburnum tinus 'Eve Price'	10L	80-100cm	Bushy	0.4Ctr	326
						Total :2040

Shrubs - Plots

Abbr	Species	Pot Size	Height	Habit	Density	Number
AUCJACR	Aucuba japonica 'Crotonifolia'	10L	40-60cm	Bushy	0.7Ctr	30
AUCVARA	Aucuba japonica 'Variegata'	10L	40-60cm	Bushy	0.7Ctr	44
BRASU	Brachyglottis 'Sunshine'	10L	40-60cm	Bushy	0.7Ctr	112
CEATHR	Ceanothus thyrsiflorus repens	10L	40-60cm	Bushy	0.7Ctr	82
CHOAP	Choisya 'Aztec Pearl'	10L	40-60cm	Bushy	0.7Ctr	218
CHOTES	Choisya ternata 'Sundance'	10L	40-60cm	Bushy	0.7Ctr	126
ELAPUMA	Elaeagnus pungens 'Maculata'	10L	80-100cm	Bushy	0.7Ctr	3
EUOFOENG	Euonymus fortunei 'Emerald 'n' Gold'	10L	30-40cm	Bushy	0.7Ctr	71
EUOFOEG	Euonymus fortunei 'Emerald Gaiety'	10L	30-40cm	Bushy	0.7Ctr	396
FAJA	Fatsia japonica	10L	60-80cm	Bushy	0.7Ctr	44
HEBMAR	Hebe 'Marjorie'	10L	30-40cm	Bushy	0.7Ctr	238
HEBMW	Hebe 'Mrs Winder'	10L	30-40cm	Bushy	0.7Ctr	3
HEBPQ	Hebe 'Purple Queen'	10L	30-40cm	Bushy	0.7Ctr	298
HEBSU	Hebe 'Sutherlandii'	10L	30-40cm	Bushy	0.7Ctr	72
HEBAL	Hebe albicans	10L	30-40cm	Bushy	0.7Ctr	93
HEBALRE	Hebe albicans 'Red Edge'	10L	30-40cm	Bushy	0.7Ctr	85
HEBFRVA	Hebe franciscana 'Variegata'	10L	30-40cm	Bushy	0.7Ctr	24
HYPHI	Hypericum 'Hidcote'	10L	40-60cm	Bushy	0.7Ctr	84
LAVANHI	Lavandula angustifolia 'Hidcote'	10L	30-40cm	Bushy	0.7Ctr	238
LAVANMU	Lavandula angustifolia 'Munstead'	10L	30-40cm	Bushy	0.7Ctr	96
LAVANVE	Lavandula angustifolia 'Vera'	10L	30-40cm	Bushy	0.7Ctr	10
MAHAQAP	Mahonia aquifolium 'Apollo'	10L	30-40cm	Bushy	0.7Ctr	68
PHOFRRER	Photinia fraseri 'Red Robin'	10L	80-100cm	Bushy	0.7Ctr	47
PITTEGB	Pittosporum tenuifolium 'Golf Ball'	10L	40-60cm	Bushy	0.7Ctr	10
PITTETT	Pittosporum tenuifolium 'Tom Thumb'	10L	30-40cm	Bushy	0.7Ctr	82
PITTEVA	Pittosporum tenuifolium 'Variegatum'	10L	40-60cm	Bushy	0.7Ctr	44
PRULAOL	Prunus laurocerasus 'Otto Luyken'	10L	60-80cm	Bushy	0.7Ctr	176
PRULAZA	Prunus laurocerasus 'Zabeliana'	10L	40-60cm	Bushy	0.7Ctr	93
ROSOF	Rosmarinus officinalis	10L	40-60cm	Bushy	0.7Ctr	27
SARHOHU	Sarcococca humilis	10L	30-40cm	Bushy	0.7Ctr	52
SKICOKEG	Skimmia confusa 'Kew Green'	10L	30-40cm	Bushy	0.7Ctr	120
SKIJARU	Skimmia japonica 'Rubella'	10L	40-60cm	Bushy	0.7Ctr	191
SPIGOLB	Spiraea japonica 'Gold Mound'	10L	40-60cm	Bushy	0.7Ctr	24
VIBDA	Viburnum davidii	10L	40-60cm	Bushy	0.7Ctr	231
						Total :3532

KEY

Full application site boundary.

Phase 2 drawing extents.

Existing trees and vegetation to be retained.

Existing trees to be removed.

Infrastructure Landscape Proposals - please refer to latest version of drawings GL1859 01-05 for details.

Drainage facilities, proposed locations for underground storage tanks. Refer to drainage information for details.

Turf & Seeding


Turf
Turf to gardens to be laid as Rolawn 'Medallion', or similar approved.

Aggregates

Gravel
Decorative gravel to be laid to a depth of 50mm over a geotextile membrane.

Drawing to be read in conjunction with GL1859 SP 01 Landscape Specification.

Location Plan

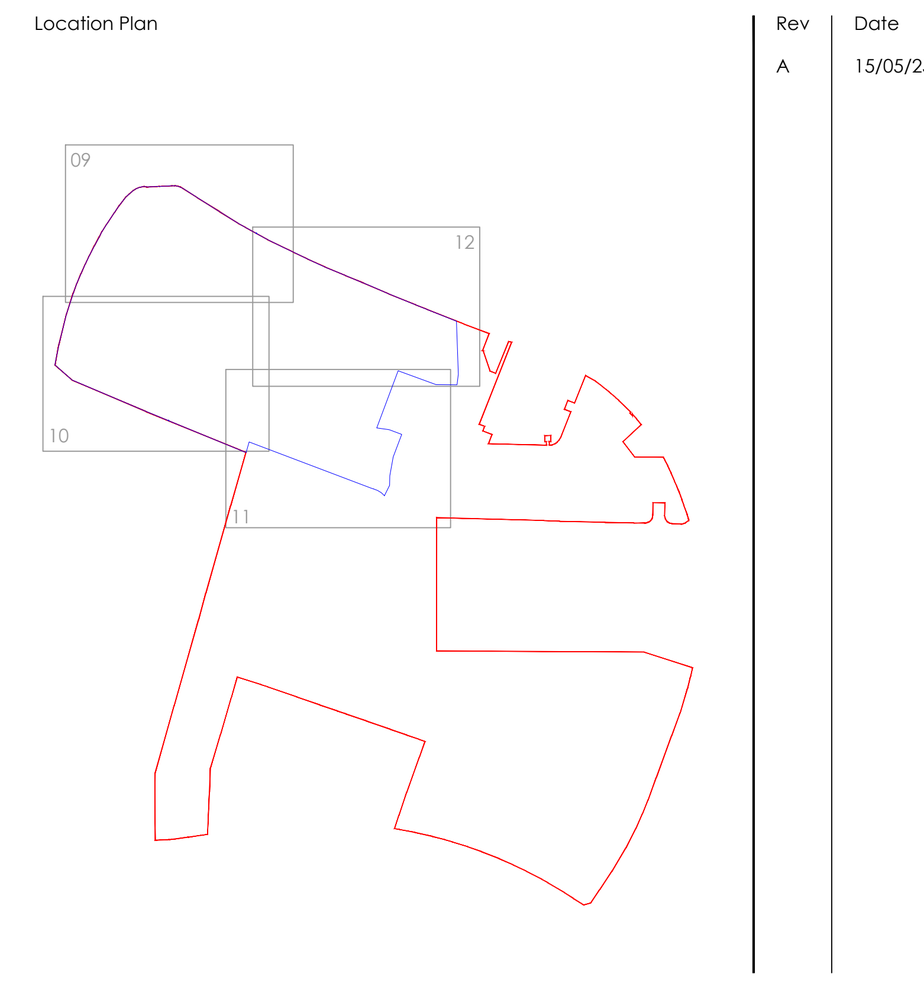

Rev	Date	Notes	Int.
A	15/05/25	Updated to client comments.	EW

Project
Cherryfield Drive
Kirkby

Drawing title
Soft Landscape Proposals - Phase 2 (Plots 1-284)
(Sheet 3 of 4)

Status
PLANNING

Client
David Wilson Homes North West

Scale: 1:250 @ A0 | Drawn By: EW | Checked By: JW

Date: 18/03/2025 | Reference: **GL1859 LP 11A**

golby+luck landscape architects

Landscape Institute Registered Practice

north

Scale Bar
0m 5m 10m 15m 20m 25m

tel: 01530 265688 | email: info@golbyandluck.co.uk | web: www.golbyandluck.co.uk

This drawing has been produced by GOLBY AND LUCK LTD © all rights reserved. Ordnance Survey Licence No. AC0000816156 registered with ProMAP
Office: 207 Leicester Road, Ibstock, Leicestershire, LE67 6HP