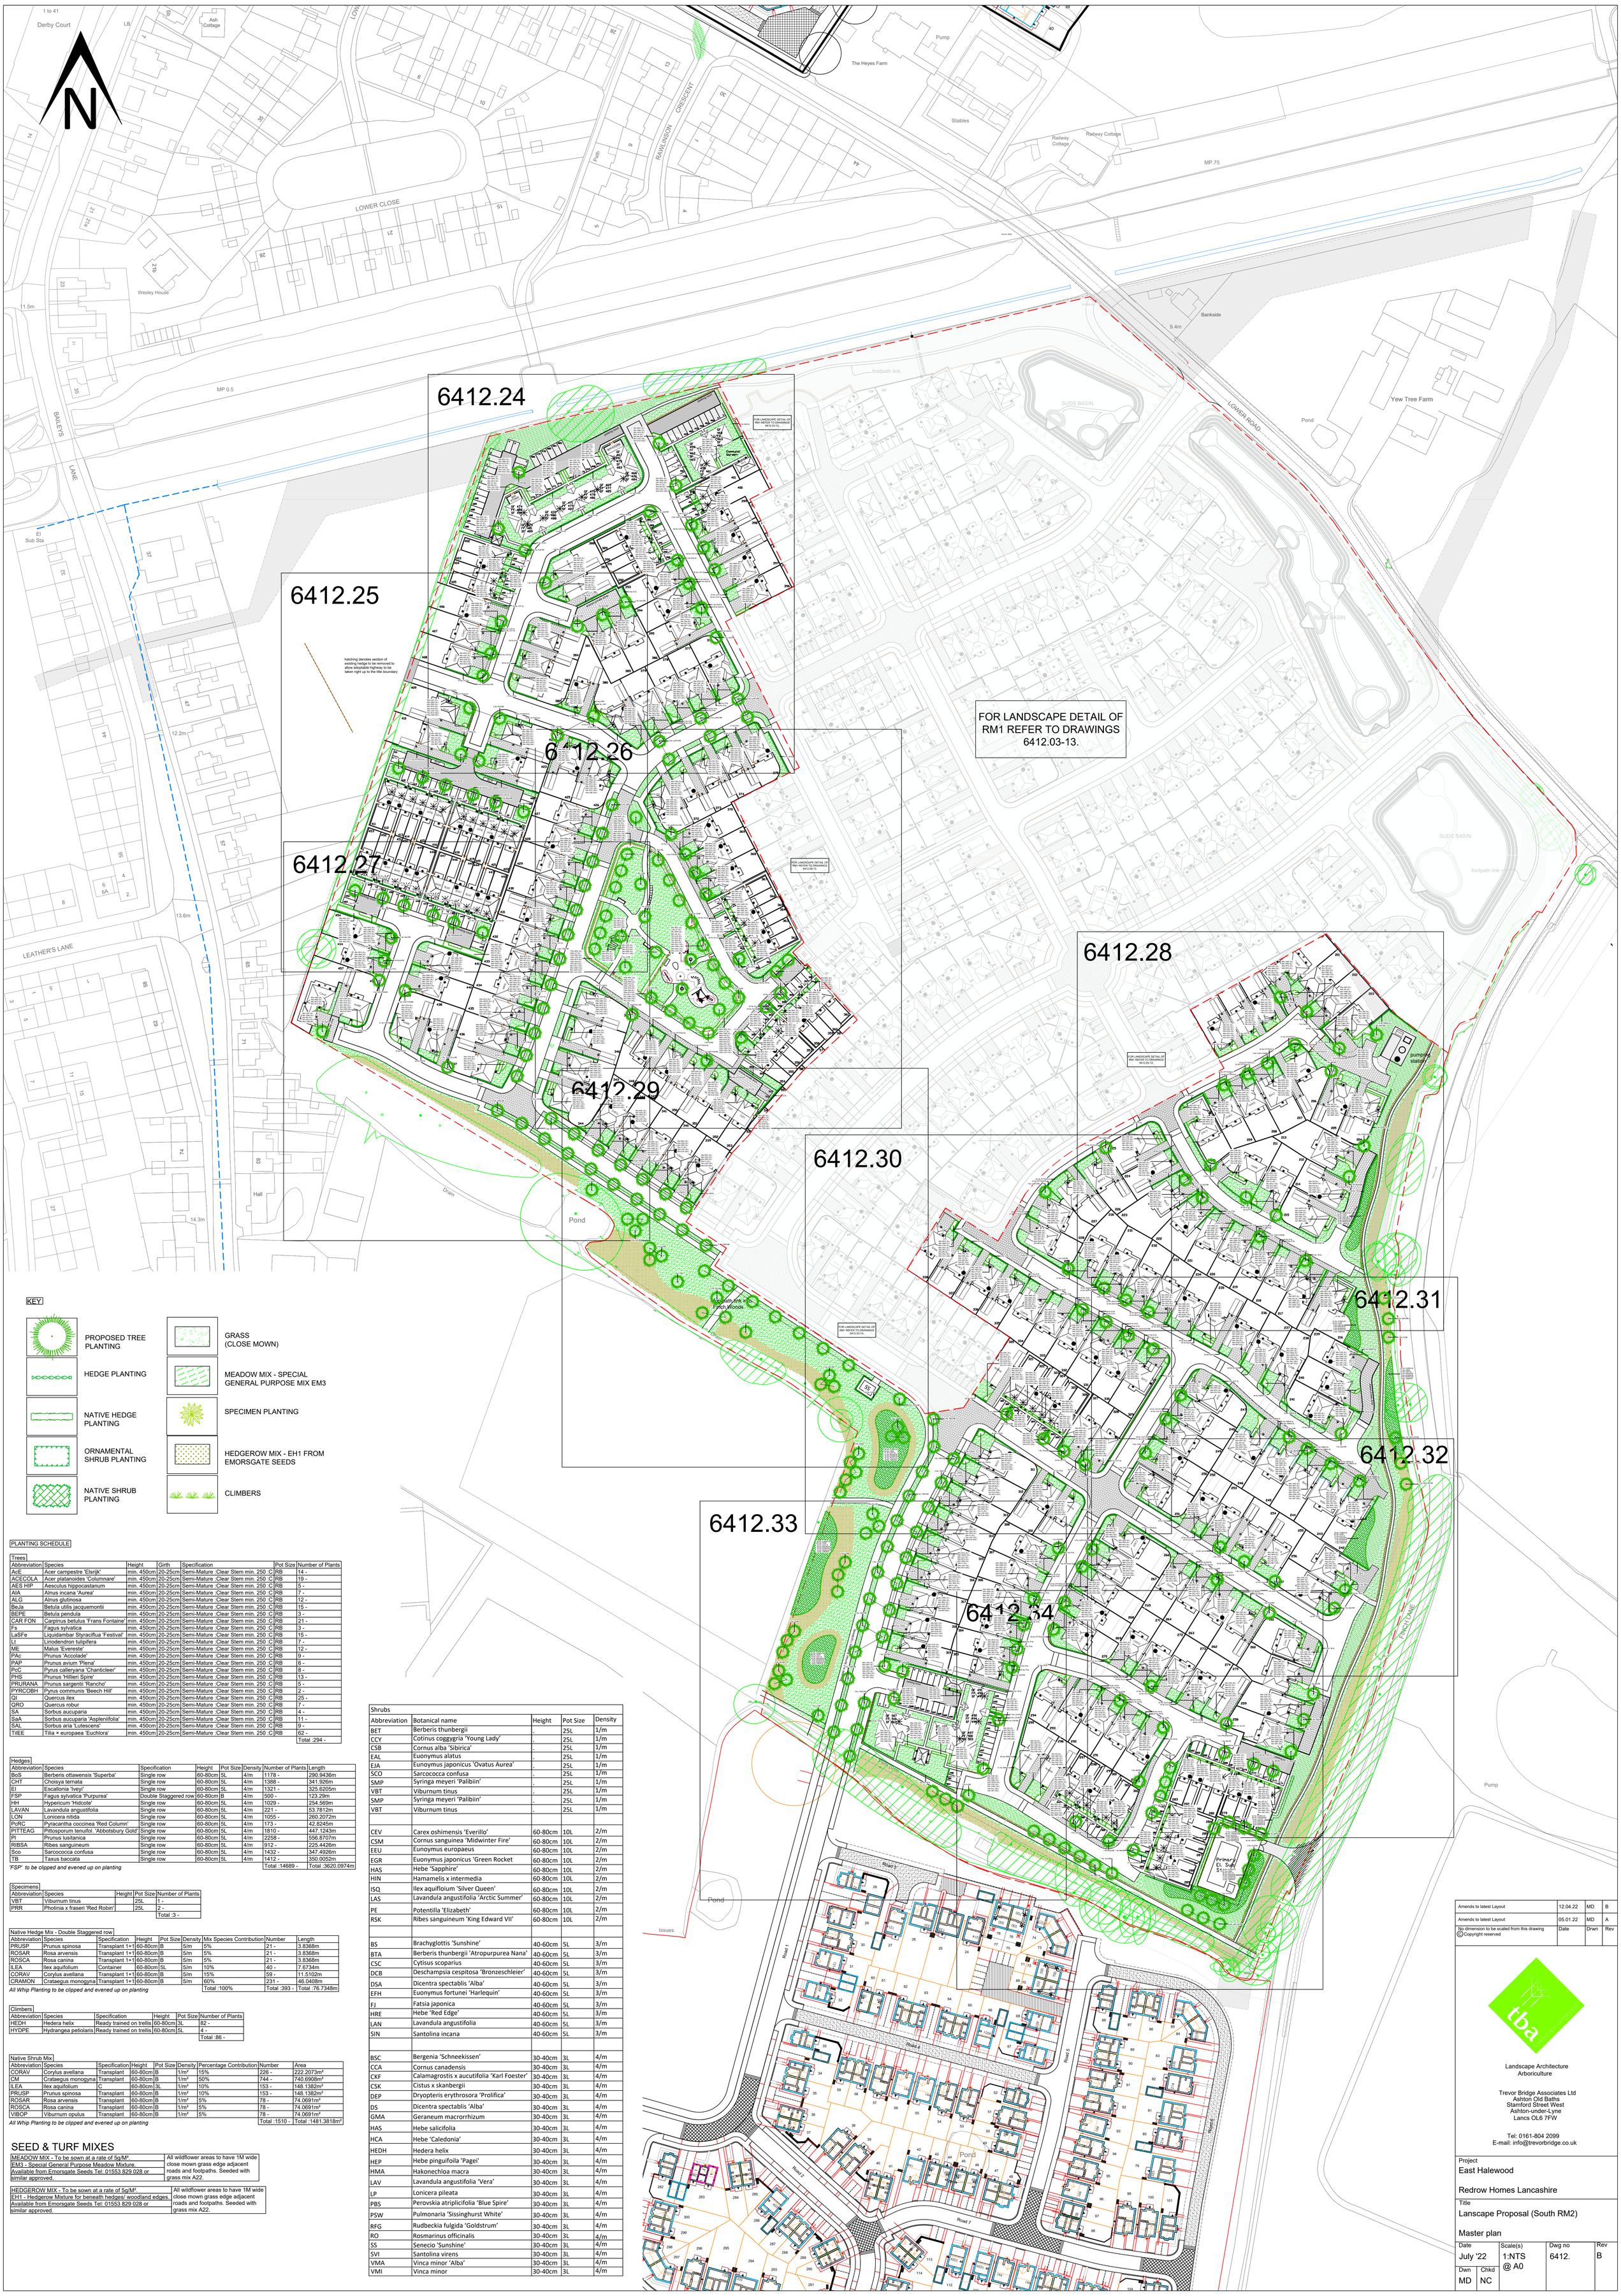


KEY

PROPOSED TREE PLANTING	GRASS (CLOSE MOWN)
HEDGE PLANTING	MEADOW MIX - SPECIAL GENERAL PURPOSE MIX EM3
NATIVE HEDGE PLANTING	SPECIMEN PLANTING
ORNAMENTAL SHRUB PLANTING	HEDGEROW MIX - EH1 FROM EMORSGATE SEEDS
NATIVE SHRUB PLANTING	CLIMBERS

PLANTING SCHEDULE

Trees

Abbreviation	Species	Height	Girth	Specification	Pot Size	Number of Plants
AcE	Acer campestre 'Elsrijk'	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	14 -
ACECOLA	Acer platanoides 'Columnare'	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	19 -
AES HIP	Aesculus hippocastanum	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	5 -
AIA	Alnus incana 'Aurea'	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	7 -
ALG	Alnus glutinosa	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	12 -
BeJa	Betula utilis jacquemontii	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	15 -
BEPE	Betula pendula	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	3 -
CAR FON	Carpinus betulus 'Frans Fontaine'	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	21 -
Fs	Fagus sylvatica	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	3 -
LaSFe	Liquidambar Styraciflua 'Festival'	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	15 -
LI	Liriodendron tulipifera	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	7 -
ME	Malus 'Evereste'	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	12 -
PAc	Prunus 'Accolade'	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	9 -
PAP	Prunus avium 'Plena'	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	6 -
PcC	Pyrus calleryana 'Chanticleer'	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	8 -
PHS	Prunus 'Hillieri Spire'	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	13 -
PRURANA	Prunus sargentii 'Rancho'	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	5 -
PYRCOBH	Pyrus communis 'Beech Hill'	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	2 -
QI	Quercus ilex	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	25 -
QRO	Quercus robur	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	7 -
SA	Sorbus aucuparia	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	4 -
SaA	Sorbus aucuparia 'Asplenifolia'	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	11 -
SAL	Sorbus aria 'Lutescens'	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	9 -
TilEE	Tilia × europaea 'Euchlora'	min. 450cm	20-25cm	Semi-Mature :Clear Stem min. 250 :C	RB	62 -
						Total :294 -

Hedges

Abbreviation	Species	Specification	Height	Pot Size	Density	Number of Plants	Length
BoS	Berberis ottawensis 'Superba'	Single row	60-80cm	5L	4/m	1178 -	290.9436m
CHT	Choisya ternata	Single row	60-80cm	5L	4/m	1388 -	341.926m
EI	Escallonia 'Iveyi'	Single row	60-80cm	5L	4/m	1321 -	325.6205m
FSP	Fagus sylvatica 'Purpurea'	Double Staggered row	60-80cm	B	4/m	500 -	123.29m
HH	Hypericum 'Hidcote'	Single row	60-80cm	5L	4/m	1029 -	254.569m
LAVAN	Lavandula angustifolia	Single row	60-80cm	5L	4/m	221 -	53.7812m
LON	Lonicera nitida	Single row	60-80cm	5L	4/m	1055 -	260.2072m
PcRC	Pyracantha coccinea 'Red Column'	Single row	60-80cm	5L	4/m	173 -	42.8245m
PITTEAG	Pittosporum tenuifol. 'Abbotsbury Gold'	Single row	60-80cm	5L	4/m	1810 -	447.1243m
PI	Prunus lusitanica	Single row	60-80cm	5L	4/m	2258 -	556.8707m
RIBSA	Ribes sanguineum	Single row	60-80cm	5L	4/m	912 -	225.4426m
Sco	Sarcococca confusa	Single row	60-80cm	5L	4/m	1432 -	347.4926m
TB	Taxus baccata	Single row	60-80cm	5L	4/m	1412 -	350.0052m
						Total :14689 -	Total :3620.0974m

'FSP' to be clipped and evened up on planting

Specimens

Abbreviation	Species	Height	Pot Size	Number of Plants
VBT	Viburnum tinus		25L	1 -
PRR	Photinia x fraseri 'Red Robin'		25L	2 -
				Total :3 -

Native Hedge Mix - Double Staggered row

Abbreviation	Species	Specification	Height	Pot Size	Density	Mix Species Contribution	Number	Length
PRUSP	Prunus spinosa	Transplant 1+1	60-80cm	B	5/m	5%	21 -	3.8368m
ROSAR	Rosa arvensis	Transplant 1+1	60-80cm	B	5/m	5%	21 -	3.8368m
ROSCA	Rosa canina	Transplant 1+1	60-80cm	B	5/m	5%	21 -	3.8368m
ILEA	Ilex aquifolium	Container	60-80cm	5L	5/m	10%	40 -	7.6734m
CORAV	Corylus avellana	Transplant 1+1	60-80cm	B	5/m	15%	59 -	11.5102m
CRAMON	Crataegus monogyna	Transplant 1+1	60-80cm	B	5/m	60%	231 -	46.0488m
						Total :100%	Total :393 -	Total :76.7348m

All Whip Planting to be clipped and evened up on planting

Climbers

Abbreviation	Species	Specification	Height	Pot Size	Number of Plants
HEDH	Hedera helix	Ready trained on trellis	60-80cm	3L	82 -
HYDPE	Hydrangea petiolaris	Ready trained on trellis	60-80cm	5L	4 -
					Total :86 -

Native Shrub Mix

Abbreviation	Species	Specification	Height	Pot Size	Density	Percentage Contribution	Number	Area
CORAV	Corylus avellana	Transplant	60-80cm	B	1/m²	15%	226 -	222.2073m²
CM	Crataegus monogyna	Transplant	60-80cm	B	1/m²	50%	744 -	740.6908m²
ILEA	Ilex aquifolium	C	60-80cm	3L	1/m²	10%	153 -	148.1382m²
PRUSP	Prunus spinosa	Transplant	60-80cm	B	1/m²	10%	153 -	148.1382m²
ROSAR	Rosa arvensis	Transplant	60-80cm	B	1/m²	5%	78 -	74.0691m²
ROSCA	Rosa canina	Transplant	60-80cm	B	1/m²	5%	78 -	74.0691m²
VIBOP	Viburnum opulus	Transplant	60-80cm	B	1/m²	5%	78 -	74.0691m²
							Total :1510 -	Total :1481.3818m²

All Whip Planting to be clipped and evened up on planting

SEED & TURF MIXES

MEADOW MIX - To be sown at a rate of 5g/M². EM3 - Special General Purpose Meadow Mixture. Available from Emorsgate Seeds Tel: 01553 829 028 or similar approved.	All wildflower areas to have 1M wide close mown grass edge adjacent roads and footpaths. Seeded with grass mix A22.
HEDGEROW MIX - To be sown at a rate of 5g/M². EH1 - Hedgerow Mixture for beneath hedges/ woodland edges. Available from Emorsgate Seeds Tel: 01553 829 028 or similar approved.	All wildflower areas to have 1M wide close mown grass edge adjacent roads and footpaths. Seeded with grass mix A22.

Shrubs

Abbreviation	Botanical name	Height	Pot Size	Density
BET	Berberis thunbergii	.	25L	1/m
CCY	Cotinus coggygria 'Young Lady'	.	25L	1/m
CSB	Cornus alba 'Sibirica'	.	25L	1/m
EAL	Euonymus alatus	.	25L	1/m
EJA	Eunoymus japonicus 'Ovatus Aurea'	.	25L	1/m
SCO	Sarcococca confusa	.	25L	1/m
SMP	Syringa meyeri 'Palibiin'	.	25L	1/m
VBT	Viburnum tinus	.	25L	1/m
SMP	Syringa meyeri 'Palibiin'	.	25L	1/m
VBT	Viburnum tinus	.	25L	1/m
CEV	Carex oshimensis 'Everillo'	60-80cm	10L	2/m
CSM	Cornus sanguinea 'Midwinter Fire'	60-80cm	10L	2/m
EEU	Eunoymus europaeus	60-80cm	10L	2/m
EGR	Euonymus japonicus 'Green Rocket	60-80cm	10L	2/m
HAS	Hebe 'Sapphire'	60-80cm	10L	2/m
HIN	Hamamelis x intermedia	60-80cm	10L	2/m
ISQ	Ilex aquifloium 'Silver Queen'	60-80cm	10L	2/m
LAS	Lavandula angustifolia 'Arctic Summer'	60-80cm	10L	2/m
PE	Potentilla 'Elizabeth'	60-80cm	10L	2/m
RSK	Ribes sanguineum 'King Edward VII'	60-80cm	10L	2/m
BS	Brachyglottis 'Sunshine'	40-60cm	5L	3/m
BTA	Berberis thunbergii 'Atropurpurea Nana'	40-60cm	5L	3/m
CSC	Cytisus scoparius	40-60cm	5L	3/m
DCB	Deschampsia cespitosa 'Bronzeschleier'	40-60cm	5L	3/m
DSA	Dicentra spectablis 'Alba'	40-60cm	5L	3/m
EFH	Euonymus fortunei 'Harlequin'	40-60cm	5L	3/m
FJ	Fatsia japonica	40-60cm	5L	3/m
HRE	Hebe 'Red Edge'	40-60cm	5L	3/m
LAN	Lavandula angustifolia	40-60cm	5L	3/m
SIN	Santolina incana	40-60cm	5L	3/m
BSC	Bergenia 'Schneekissen'	30-40cm	3L	4/m
CCA	Cornus canadensis	30-40cm	3L	4/m
CKF	Calamagrostis x aucutifolia 'Karl Foester'	30-40cm	3L	4/m
CSK	Cistus x skanbergii	30-40cm	3L	4/m
DEP	Dryopteris erythrosora 'Prolifica'	30-40cm	3L	4/m
DS	Dicentra spectablis 'Alba'	30-40cm	3L	4/m
GMA	Geraneum macrorrhizum	30-40cm	3L	4/m
HAS	Hebe salicifolia	30-40cm	3L	4/m
HCA	Hebe 'Caledonia'	30-40cm	3L	4/m
HEDH	Hedera helix	30-40cm	3L	4/m
HEP	Hebe pinguifoila 'Pagei'	30-40cm	3L	4/m
HMA	Hakonechloa macra	30-40cm	3L	4/m
LAV	Lavandula angustifolia 'Vera'	30-40cm	3L	4/m
LP	Lonicera pileata	30-40cm	3L	4/m
PBS	Perovskia atriplicifolia 'Blue Spire'	30-40cm	3L	4/m
PSW	Pulmonaria 'Sissinghurst White'	30-40cm	3L	4/m
RFG	Rudbeckia fulgida 'Goldstrum'	30-40cm	3L	4/m
RO	Rosmarinus officinalis	30-40cm	3L	4/m
SS	Senecio 'Sunshine'	30-40cm	3L	4/m
SVI	Santolina virens	30-40cm	3L	4/m
VMA	Vinca minor 'Alba'	30-40cm	3L	4/m
VMI	Vinca minor	30-40cm	3L	4/m

Issues	Date	Drwn	Rev
Amends to latest Layout	12.04.22	MD	B
Amends to latest Layout	05.01.22	MD	A

No dimension to be scaled from this drawing
© Copyright reserved

Landscape Architecture
Arboriculture

Trevor Bridge Associates Ltd
Ashton Old Baths
Stamford Street West
Ashton-under-Lyne
Lancs OL6 7FW

Tel: 0161-804 2099
E-mail: info@trevorbridge.co.uk

Project
East Halewood

Redrow Homes Lancashire

Title
Lanscape Proposal (South RM2)

Master plan

Date	Scale(s)	Dwg no	Rev
July '22	1:NTS @ A0	6412.	B
Dwn: MD	Chkd: NC		