





Wall Elevation from Fox's Bank Lane (Section 1) - NTS



Wall Elevation from Fox's Bank Lane (Section 2) - NTS

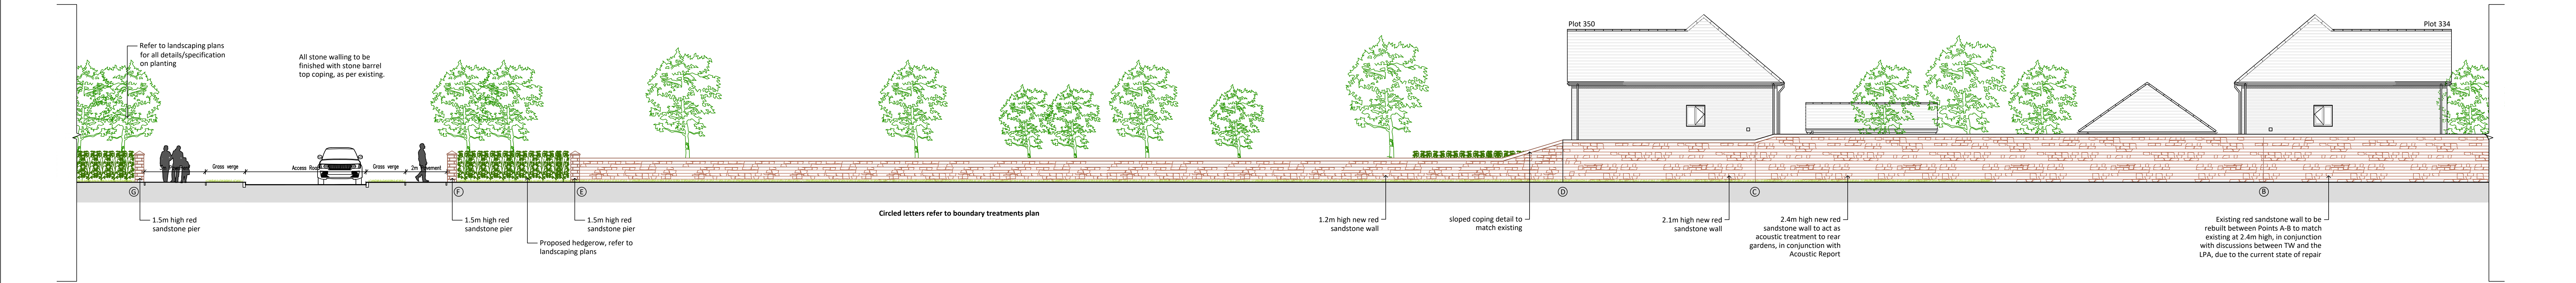


Site Layout Plan - NTS

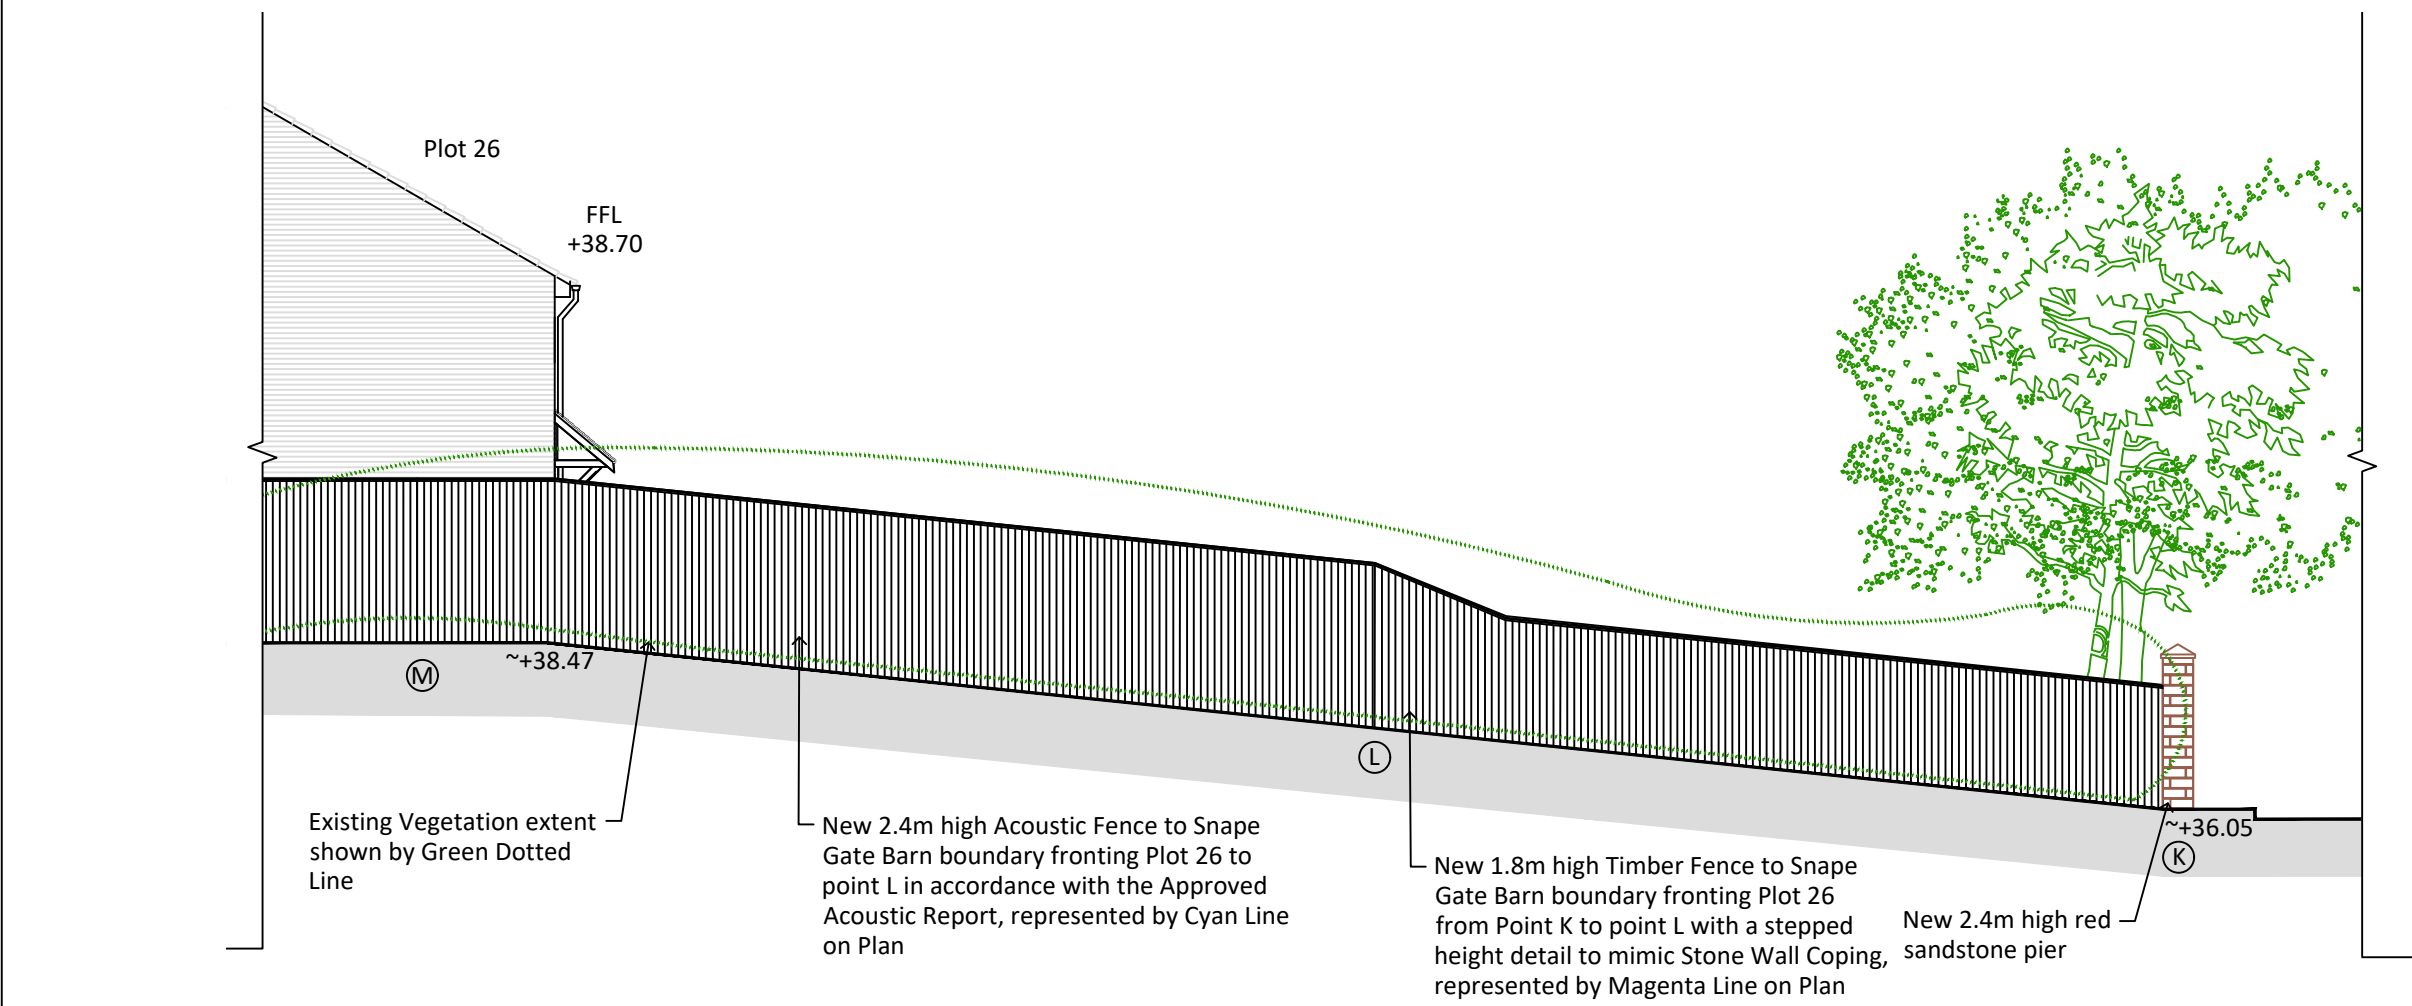


Fence Elevation from Snape Gate Barn - NTS


Indicative Stone Pier Details - 1:20

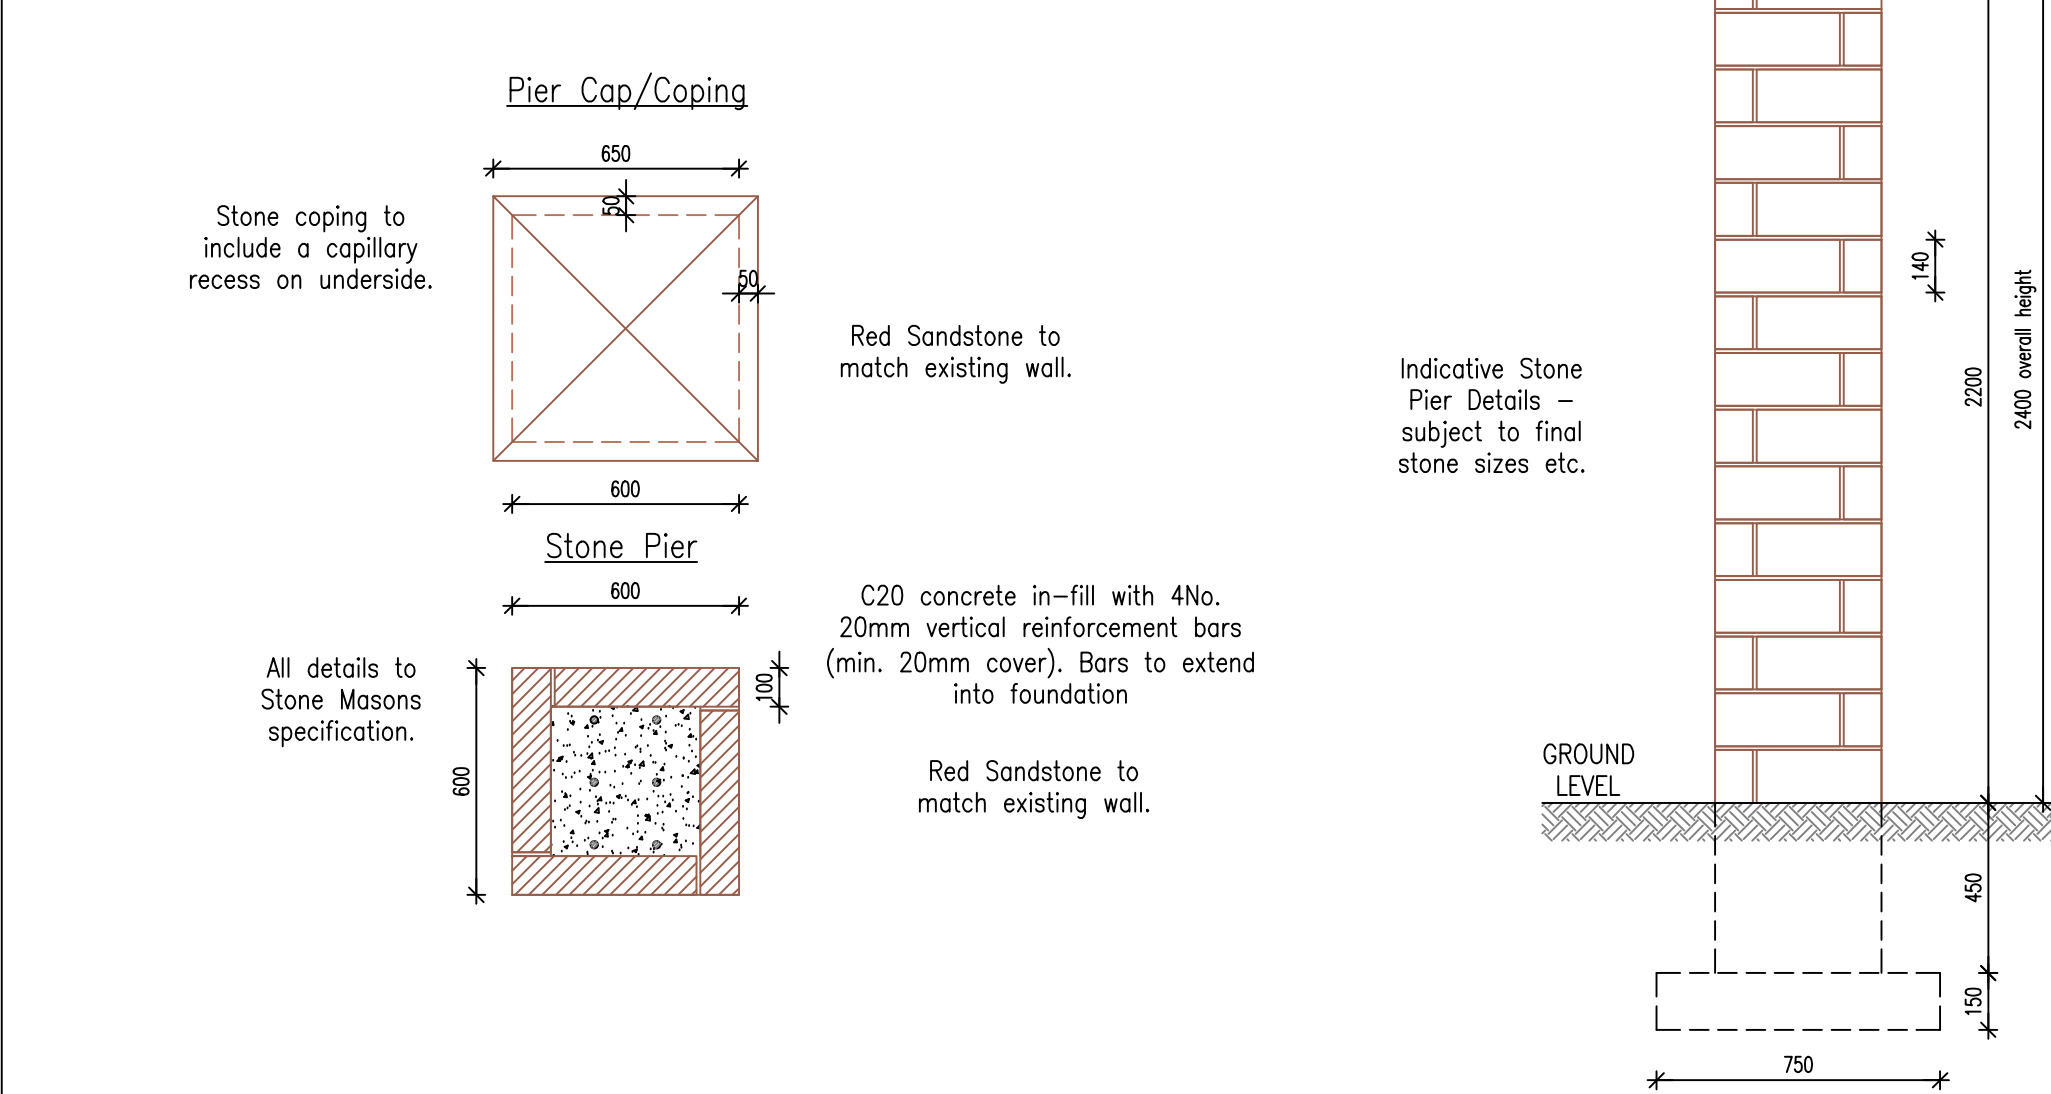

Indicative Stone Pier Elevations - NTS

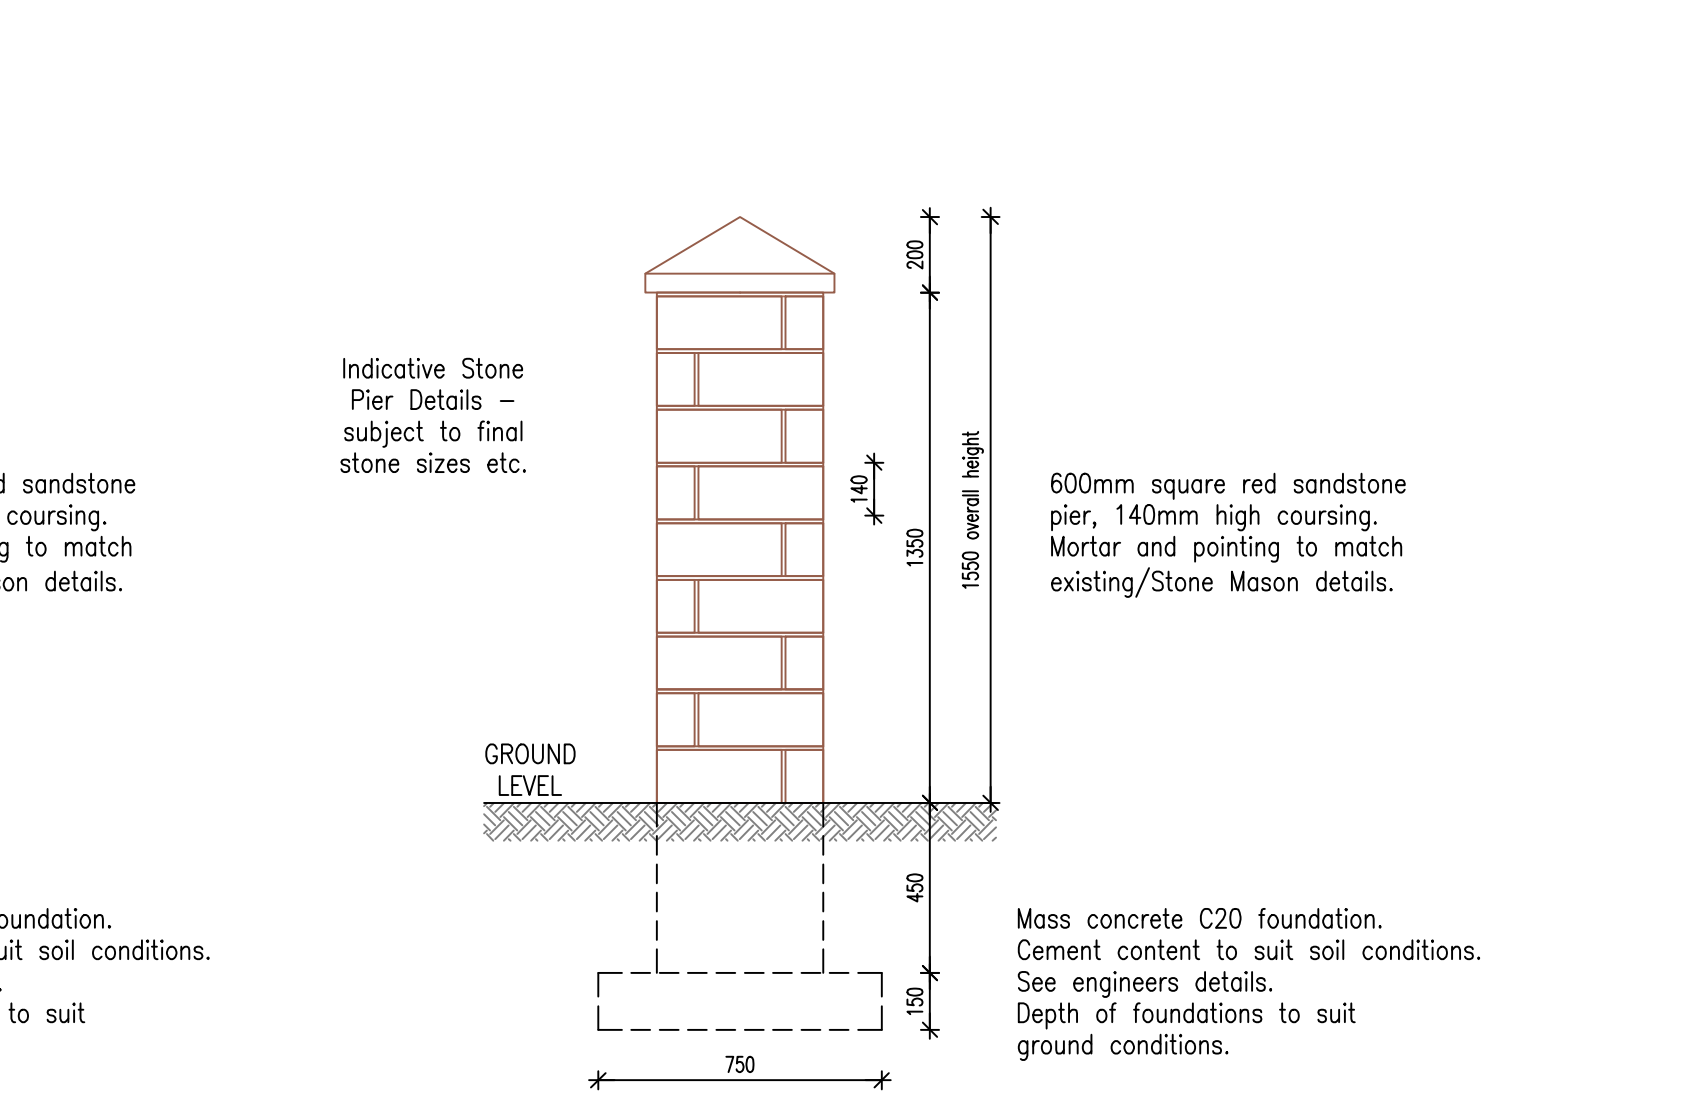

Google Street View Photographs of Sloped Coping - NTS

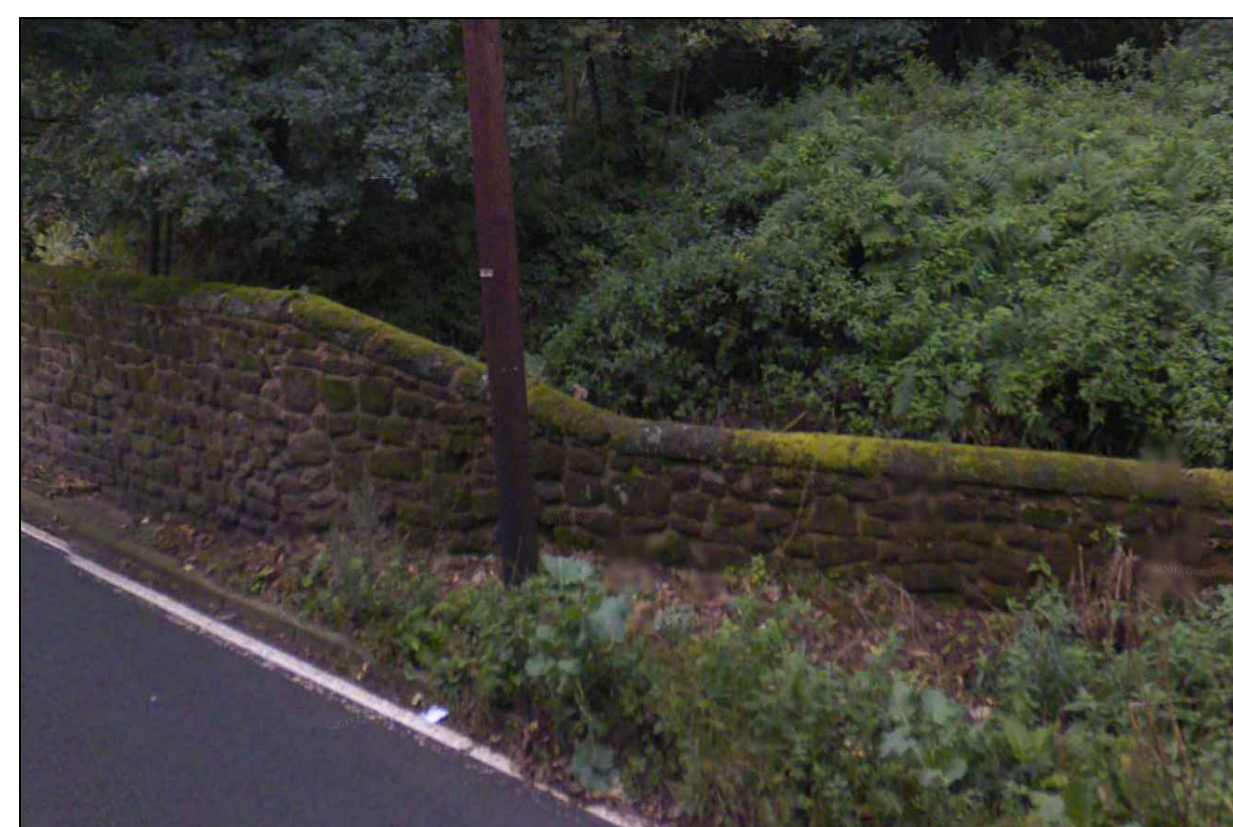

Google Street View Photographs of Low Level Wall - NTS



Proposed Wall to tie in with Existing Coursing Bands as shown - NTS

Technical Data* for St Bees Sandstone

Density	2340kg/m ³
Compressive Strength	77.6 MPa
Water Absorption	0.22%/24hrs
Porosity	13.30%
Durability (Phase II)	0.8 MPa
Flexural Strength	0.8 MPa
Breaking Load at Compressive	840
Slip Resistance (Dry)	111
Slip Resistance (Wet)	88
Abrasion Resistance	400
Vapour Permeability	0.025 (100)
Reaction to Fire	Non-combustible

Proposed Facing Stone to be used by Stone Central (Stone Masons) where the new stone is required



Methodology of Works

Fox wood Garden Village

- Source and obtain samples of suitable matching stone for approval by the client.
- Ensure that stone can be supplied in sufficient quantity and of consistent quality to meet the requirements of the project.
- Barrier workplace off with Heras fencing ensuring the public cannot enter
- Stone Central operatives to sort stone from bags where others have taken down existing wall
- Carefully clean off stone and place on pallets in various sizes to rebuild
- Using NHL 2 and locally sourced sands in 3 to 1 ratio to be agreed by conservation officer
- Carefully tooth out existing wall to enable bond
- Build wall to the correct line and level agreed with MC
- Pointing
- Agree pointing sample colour and finish with conservation officer before works commence
- Cleaning
- Before the end of each shift the area is to be cleaned up and compound to be made secure

Key

- Proposed 2.4m high Acoustic Fence as per the details set out in the Approved Acoustic Report
- Proposed 1.8m high Close Boarded Timber Fence
- Proposed Stone Wall to Fox Bank Lane

H	Following advice from TEP and approved by Clare Appleyard on 18/06/25, low level existing wall between J-K removed and replaced with mature hedge planting due to Health & Safety concerns regarding the proximity to existing tree and it's potential requirement for removal.	18/06/25	BB
G	Following site visit with Clare Appleyard 05/06/25, scope revised fronting Plots 26 & 27 due to lack of existing stone wall.	05/06/25	BB
F	Updated for clarity on height of rebuilt section A-B.	12/07/24	BB
E	Revised in line with As Built section, specification updated to St. Bees and Point A buffer shown.	27/02/24	BB
D	Revised in line with on site discussion with Stone Central & Knowsley MBC to increase the pillar width to 600x250mm.	20/10/23	BB
C	Revised in line with TEP's comments.	04/05/23	BB
B	Revised in line with Planner's comments.	09/03/23	BB
A	Revised in line with Planner's comments.	16/12/22	BB

Rev	Description	Date	Initial
-----	-------------	------	---------

Taylor Wimpey

Taylor Wimpey North West
Washington House, Birchwood Park,
Warrington, Cheshire WA3 6GR
Tel 01925 848 500 Fax 01925 849 501
www.taylorwimpey.com

FOX WOOD GARDEN VILLAGE

INDICATIVE ELE/SECTION STONE WALL - FINAL

PLANNING

AS SHOWN @ A0 25/10/22 BB BE

DRAWING NUMBER

20285 IWE 04 H