

Technical Specification


Control Point	Head (m)	Flow (l/s)
Primary Design	1.200	80.000
Flush-Flo™	0.539	79.998
Kick-Flo®	0.943	71.200
Mean Flow		64.226

Hydro-Brake® Optimum Flow Control including:

- 5 mm grade 304L stainless steel
- Integral stainless steel pivoting by-pass door allowing clear line of sight through to outlet, c/w stainless steel operating rope
- Beed blasted finish to maximise corrosion resistance
- Stainless steel fixings
- Rubber gasket to seal outlet
- Indicative Weight: 110 kg



hydro-int.com/patents

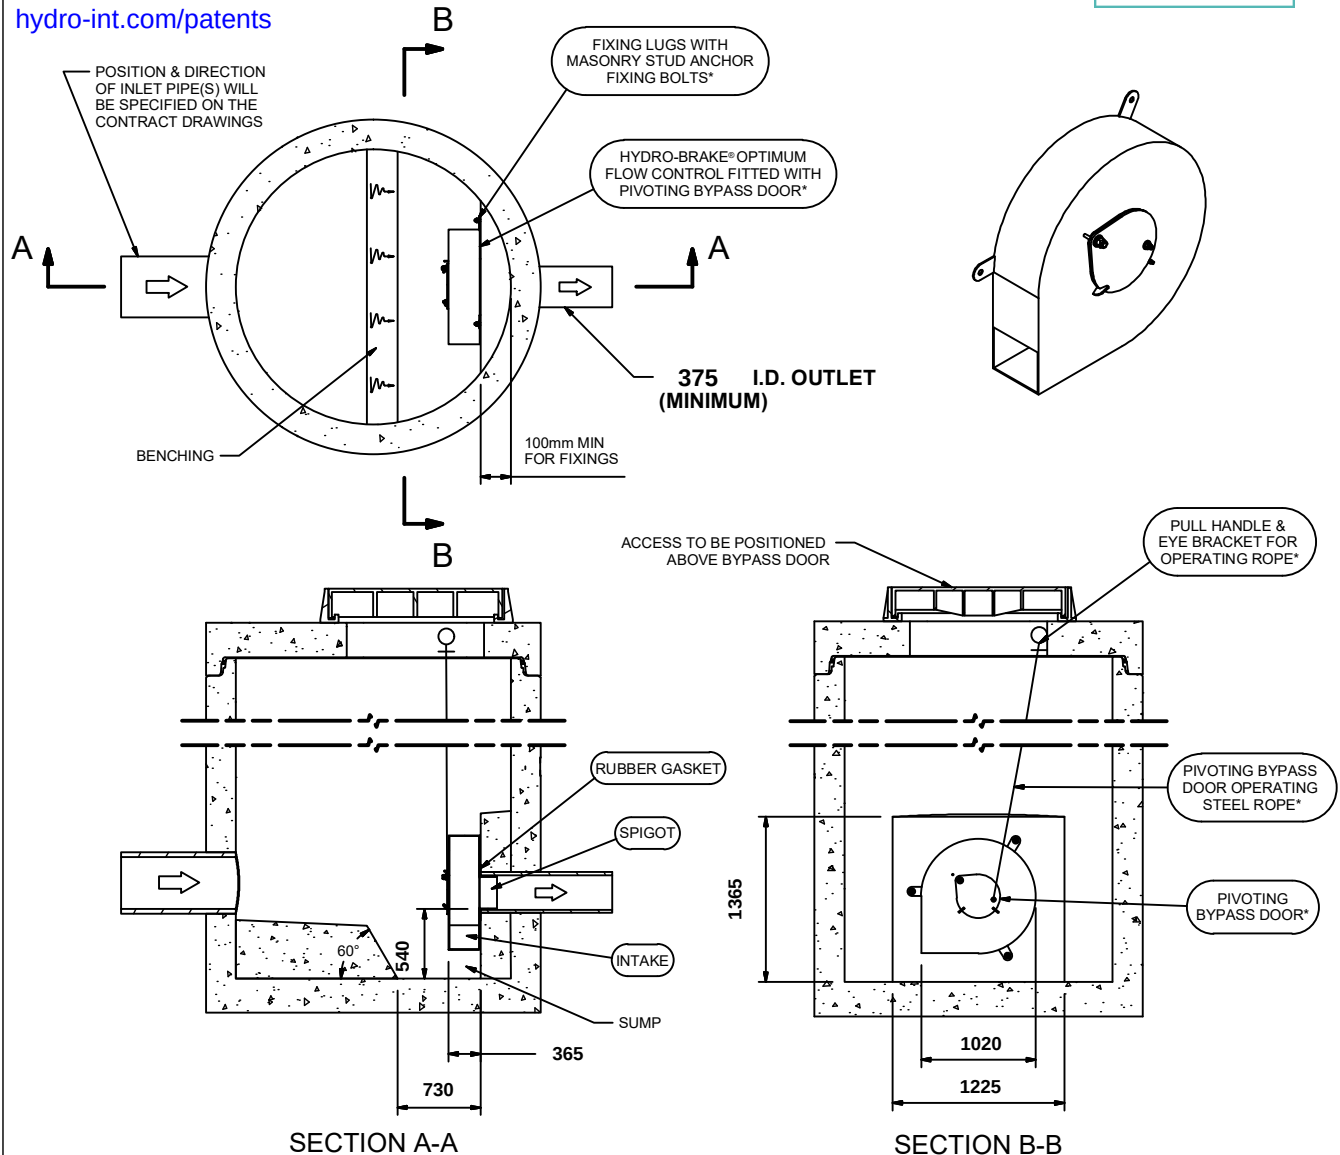

IMPORTANT:

○ LIMIT OF HYDRO INTERNATIONAL SUPPLY
 THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
 FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
 ALL CIVIL AND INSTALLATION WORK BY OTHERS
 * WHERE SUPPLIED
 HYDRO-BRAKE® FLOW CONTROL & HYDRO-BRAKE® OPTIMUM FLOW CONTROL ARE REGISTERED TRADEMARKS FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

**DESIGN
ADVICE**



The head/flow characteristics of this SHE-0357-8000-1200-8000 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

**Hydro
International**
 A CRH COMPANY

DATE	06/10/2023 13:49	SHE-0357-8000-1200-8000 Hydro-Brake® Optimum
SITE	Lickers Lane	
DESIGNER	Joseph Poole	
REF	S12	