

FORMATION AREA EARTHWORKS

SURFACE LEVEL DATA

NUMBER	MINIMUM LEVEL	MAXIMUM LEVEL	COLOUR
1	-5.598	-5.000	
2	-5.000	-4.000	
3	-4.000	-3.000	
4	-3.000	-2.000	
5	-2.000	-1.000	
6	-1.000	0.000	

BORROW PIT EARTHWORKS

SURFACE LEVEL DATA


NUMBER	MINIMUM LEVEL	MAXIMUM LEVEL	COLOUR
1	-2.226	-2.000	
2	-2.000	-1.500	
3	-1.500	-1.000	
4	-1.000	-0.500	
5	-0.500	0.000	

Notes

1. THIS DRAWING IS THE COPYRIGHT OF TIER CONSULT LTD AND CANNOT BE REPRODUCED IN ANY FORM WITHOUT WRITTEN CONSENT FROM THE COMPANY.
2. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT ARCHITECTS, ENGINEERS AND SPECIALIST'S DRAWINGS TOGETHER WITH THE APPROPRIATE SPECIFICATION.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNO, FOR THE PURPOSES OF CONSTRUCTION THIS DRAWING MUST NOT BE SCALED AND ONLY WRITTEN DIMENSIONS USED. IT IS THE CONTRACTORS RESPONSIBILITY TO CHECK ALL DIMENSIONS ON SITE PRIOR TO CONSTRUCTION AND ANY DISCREPANCIES TO BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ENGINEER IN WRITING.
4. ALL LEVELS ARE IN METRES UNO & TO OS DATUM.

Legend

Component	Area (m2)	Depth (m)	Volume of Excavation (m3)	Volume of Infil (m3)	Total Volume (m3)	Description
Volume Required for Country Park			0	37,144	-37,144	
Borrow Pit Volume				17,376	17,376	
Vulume from Area Cut to Formation				31,146	31,146	
Unit 2 Earthworks				11,378	-11,378	
Total Earthworks Volumes					0	Imported Material

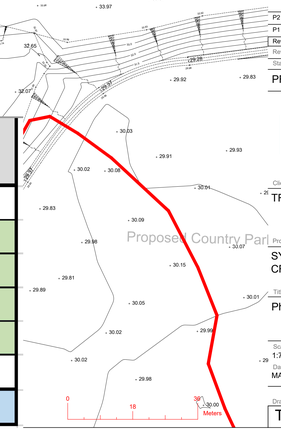

Rev	Date	By	Description	Appd
P2	23.03.23	JCB	Borrow pit Increased	WNL
P1	21.03.23	JCB	Issued for Information	WNL

Revisions

Status: PRELIMINARY

Tier Consult Ltd.
Richmond House
Sandpiper Court
Chester Business Park
Chester | CH4 9QZ
t: 01244 684900

Client: TRITAX SYMMETRY HUYTON LIMITED

Project: SYMMETRY PARK CRONTON

Title: Phase 2 Country Park Cut Strategy

Scale	Drawn	Revision
1:750@A0	JCB	P2
Date: MAR'23	Checked: WNL	

TIER Project No.: T_18_2126

Drawing Ref.: T_18_2126-CIV-SK19